

45°

DYNAMIC ABUTMENT SOLUTIONS

DIGITAL solutions



PRODUCT REFERENCE





www.dynamicabutment.com

DYNAMIC ABUTMENT® SOLUTIONS

VIRGINIA WOOLF, 17 · 25005 · LLEIDA (SPAIN)
INTERNATIONAL +34 973 289 580
das@dynamicabutment.com

SPAIN +34 973 289 580
spain@dynamicabutment.com

Dynamic Abutment® Solutions is the trademark of the manufacturer Talladium España S.L

The information included in this catalogue is exclusively addressed to professionals in dental sector.

All commercial trademarks mentioned herein are fully registered by their respective companies, and the images that appear are just to provide an orientation. Talladium reserves the right to modify this document without previous notice. Talladium is not responsible for the inadequate execution of these products if the warning indications corresponding to every reference are not contemplated.

Ask about the products available with CE legislation. Some of the products are not authorized for sale and distribution or do not have a sales license in some countries according to other legislations. Please ask for information: das@dynamicabutment.com



Visit our Online Store to find all our products and compatibilities:

www.dynamicabutmentstore.com

| | |
|-----|---|
| 3 | <i>LIST OF COMPATIBILITES</i> |
| 6 | <i>COMPATIBILITIES AVAILABLE</i> |
| 34 | <i>COMPATIBILITY CODES</i> |
| 171 | <i>LIBRARY CODES</i> |
| 172 | <i>DYNAMIC SCREWS TECHNICAL SPECIFICATIONS</i> |
| 175 | <i>DYNAMIC SCREWDRIVER & DYNAMIC SCREWS</i> |
| 176 | <i>TRAIGHT SCREWS TECHNICAL SPECIFICATIONS</i> |
| 179 | <i>SCREWDRIVERS & STRAIGHT SCREWS</i> |
| 180 | <i>DYNAMIC SYSTEM SCANBODIES COLORS ACCCORDING TO COMPATIBILITY</i> |
| 184 | <i>DYNAMIC MILLING TOOL SPECIFICATIONS</i> |
| 186 | <i>SCREWDRIVER ADAPTOR/COMPLEMENTS</i> |
| 187 | <i>IDENTIFICATION PRODUCT/ SECURITY & TRACEABILITY</i> |
| 188 | <i>TALLADIUM GUARANTEE</i> |

DYNAMIC ABUTMENT® SOLUTIONS

DYNAMIC
DASSYSTEM

DYNAMIC ABUTMENT® SOLUTIONS

MULTI-UNIT
DASSYSTEM

Work different, work better

LIST OF COMPATIBILITIES

| | | | | | |
|-------------|----------------------------|-------------------------------|--------------------|-------------------|---------------------|
| AB | BIOTEC | ECKERMANN | IMPLANTSWISS | NORMON | SOLUTIONS |
| ACE | BRENT MEDICAL | ELITE MEDICA | INTRA-LOCK | NOVA IMPLANTS | TBR |
| ADIN | BTI | EUROTEKNIKA | JDENTALCARE | OSSTEM IMPLANT | TITANIUM-FIX |
| ALFA-GATE | BTK | F&B IMPLANT (FIT & BRILLIANT) | KEYSTONE | OSTEOPLUS | TREE-OSS |
| ALPHABIO | CAMLOG | GALIMPLANT | KLOCKNER | OXY | TRI DENTAL IMPLANTS |
| ANCLADEN | CONEXÃO SISTEMA DE PROTESE | GC TECH | LASAK | PALTOP | TRINON |
| ANKYLOS | CORTEX | GLOBAL D (TEKKA) | LEADER | PHIBO | UFIT |
| ANTHOGYR | COWELLMEDI | GMI (ILERIMPLANT) | MEDENIKA | PROCLINIC | VULKAN IMPLANTS |
| ARDS | C-TECH | GT MEDICAL | MEDENTIS | RADHEX | WIN |
| ASTRA | DENTAL TECH | HAHN IMPLANT (GLIDEWELL) | MEGAGEN | REFLECT | XIVE |
| AVINENT | DENTAURUM | HIOSSEN | MICRODENT | SEWON MEDIX | YES IMPLANT |
| B&W | DENTEGRIS | HI-TEC | MIS | SIC INVENT | ZIACOM |
| BEGO | DENTIS | IBS | MOZO-GRAU (TICARE) | SIGNO VINCES | ZIMMER |
| BIOCONCEPT | DENTIUM | IDO IMPLANTS | MPI | SIN IMPLANTS | |
| BIOGENESIS | DIO IMPLANTS | IHDE DENTAL (IMBIODENT) | NEOBIOTECH | SOUTHERN IMPLANTS | |
| BIOHORIZONS | DMI DENTAL SUPPLY | IMPLANT DIRECT | NEODENT | STERI-OSS | |
| BIOLOK | DSP BIOMEDICAL | IMPLANT GENESIS | NEOSS | STERNGOLD | |
| BIOMET 3i | EASY IMPLANT | | NOBEL BIOCARE | STRAUMANN | |
| BIONER | | | NORIS MEDICAL | SYBRON IMPLANT | |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-------|-----------------------|-------------------|-----------|----------|--------------------|
| AB | I2 | 3,5/3,75/4,2/4,5/ | Standard | R/NR | 0040 |
| AB | I2 | 5/6 | Standard | R/NR | 0040 |
| AB | I22 | 3,75/4,22 | Standard | R/NR | 0040 |
| AB | I5 | 3,5/3,75/4,2/4,5/ | Standard | R/NR | 0040 |
| AB | I5 | 5/6/7/8 | Standard | R/NR | 0040 |
| AB | I55 | 3,75/4,2/4,5 | Standard | R/NR | 0040 |
| AB | I55 | 5/6/7/8 | Standard | R/NR | 0040 |
| AB | I10 | 4,2/5 | Standard | R/NR | 0040 |
| AB | I15 | 6/7/8 | Standard | R/NR | 0040 |
| AB | Multi Unit D1-P64 | Multi Unit D1-P64 | Universal | R | 0025 |
| ACE | External Hex | 3,3 | NP 3,5 | R/NR | 0023 |
| ACE | External Hex | 3,75/4 | RP 4,1 | R/NR | 0024 |
| ACE | External Hex | 4,75 | WP 5 | R/NR | 0058 |
| ACE | Infinity TRI-CAM | 3,5 | 3,5 | R/NR | 0026 |
| ACE | Infinity TRI-CAM | 4,3 | 4,3 | R/NR | 0027 |
| ACE | Infinity TRI-CAM | 5 | 5 | R/NR | 0028 |
| ACE | Infinity Internal Hex | 3,7/4,1 | 3,5 | R/NR | 0040 |
| ACE | Infinity Internal Hex | 4,7/5,1 | 4,5 | R/NR | 0041 |
| ACE | Infinity Octagon | 3,3 | RP 4,8 | R/NR | 0037 |
| ACE | Infinity Octagon | 4,1 | RP 4,8 | R/NR | 0037 |
| ACE | Infinity Octagon | 4,8 | RP 4,8 | R/NR | 0037 |
| ACE | Infinity Octagon | 4,8 | WP 6,5 | R/NR | 0096 |
| ACE | Multi Unit | Universal | Universal | R | 0025 |
| ADIN | Swell | 3,3 | 3,45 | R/NR | 0040 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-----------|------------------------|------------------------|-----------|----------|--------------------|
| ADIN | Swell | 3,75/4,2 | 3,6 | R/NR | 0040 |
| ADIN | Swell | 5 | 4 | R/NR | 0040 |
| ADIN | Swell | 6 | 4,6 | R/NR | 0040 |
| ADIN | Touareg-S / Touareg-OS | 3,5 | 3,45 | R/NR | 0040 |
| ADIN | Touareg-S / Touareg-OS | 3,75/4,2 | 3,6 | R/NR | 0040 |
| ADIN | Touareg-S / Touareg-OS | 5 | 4 | R/NR | 0040 |
| ADIN | Touareg-S / Touareg-OS | 6 | 5 | R/NR | 0040 |
| ADIN | Touareg CloseFit | 2,75 | UNP | R/NR | 0188 |
| ADIN | Touareg CloseFit | 3,5 | RP | R/NR | 0021 |
| ADIN | Touareg CloseFit | 4,3/5 | WP | R/NR | 0022 |
| ADIN | Swell | 3,3 | 3,45 | Z10 | 0042 |
| ADIN | Swell | 3,75/4,2 | 3,6 | Z10 | 0042 |
| ADIN | Swell | 5 | 4 | Z10 | 0042 |
| ADIN | Swell | 6 | 4,6 | Z10 | 0042 |
| ADIN | Touareg-S / Touareg-OS | 3,5 | 3,45 | Z10 | 0042 |
| ADIN | Touareg-S / Touareg-OS | 3,75/4,2 | 3,6 | Z10 | 0042 |
| ADIN | Touareg-S / Touareg-OS | 5 | 4 | Z10 | 0042 |
| ADIN | Touareg-S / Touareg-OS | 6 | 5 | Z10 | 0042 |
| ADIN | Touareg CloseFit | 3 | | R | 0145 |
| ADIN | Touareg CloseFit | 3 | NP | NR | 0145 |
| ADIN | Multi Unit TMA | Universal | Universal | R | 0025 |
| ALFA-GATE | Bioactive S-line/SLA | 3,3/3,75/4,2/4,7/5,2/6 | 3,75 | R/NR | 0040 |
| ALFA-GATE | Conical | 3,5 | NP | R/NR | 0021 |
| ALFA-GATE | Conical | 4,3/5 | RP | R/NR | 0022 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|----------|-----------------------------------|-----------------------|-----------|----------|--------------------|
| ALPHABIO | Internal Hex Connection (IH) SPI | 3,3/3,75/4,2/5/6 | Universal | R/NR | 0040 |
| ALPHABIO | Internal Hex Connection (IH) ICE | 3,7/3,75/4,2/4,65/5,3 | Universal | R/NR | 0040 |
| ALPHABIO | Internal Hex Connection (IH) DFI | 3,3/3,75/4,2/5 | Universal | R/NR | 0040 |
| ALPHABIO | Internal Hex Connection (IH) ATID | 3,3/3,75/4,2/5/6 | Universal | R/NR | 0040 |
| ALPHABIO | Internal Hex Connection (IH) NEO | 3,75/4,2/5 | 3,5 | R/NR | 0040 |
| ALPHABIO | Conical Hex Connection (CHC) NICE | 3,2 | Narrow | R/NR | 0136 |
| ALPHABIO | Conical Hex Connection (CHC) NEO | 3,2/3,5 | Narrow | R/NR | 0136 |
| ALPHABIO | Conical Standard Connection (CS) | 3,75/4,2/5 | Standard | R/NR | 0169 |
| ALPHABIO | Multi Unit | | Universal | R | 0195 |
| ANCLADEN | Anclalock | 3,75/4,25/5 | 3,5 | R/NR | 0040 |
| ANKYLOS | Ankylos | 3,5 | 3,5 | R | 0075 |
| ANKYLOS | Ankylos | 4,5 | 4,5 | R | 0075 |
| ANKYLOS | Ankylos | 5,5 | 5,5 | R | 0075 |
| ANKYLOS | Ankylos | 7 | 7 | R | 0075 |
| ANKYLOS | Balance Base Narrow | Universal | Universal | R | 0183 |
| ANTHOGYR | Axiom REG / PX | 3,4 | 3,4 | R/NR | 0161 |
| ANTHOGYR | Axiom REG / PX | 4 | 4 | R/NR | 0149 |
| ANTHOGYR | Axiom REG / PX | 4,6 | 4,6 | R/NR | 0149 |
| ANTHOGYR | Axiom REG / PX | 5,2 | 5,2 | R/NR | 0162 |
| ANTHOGYR | Anthofit HE | 3,5/3,75/4 | R (4,1) | R/NR | 0024 |
| ANTHOGYR | Anthofit HE | 5 | L (5) | R/NR | 0058 |
| ANTHOGYR | Ossfit | 3,5/4,2 | 4,8 | R/NR | 0074 |
| ANTHOGYR | Ossfit | 3,5/4,2 | 4,8 | R/NR | 0037 |
| ANTHOGYR | Ossfit | 5 | 6,5 | R/NR | 0096 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|----------|---------------------------------------|--------------------------|---------------------|----------|--------------------|
| ANTHOGYR | Multi Unit | 4,8 | Universal | R | 0163 |
| ARDS | Smart | 3,75/4,2/4,5 | 3,75 | R/NR | 0040 |
| ARDS | Classic | 3,3/3,75/4,2/5/6 | 3,75 | R/NR | 0040 |
| ARDS | Premium | 3,3/3,75/4,2/5/6 | 3,75 | R/NR | 0040 |
| ARDS | CIT | 3,3/3,75/4,2/5/6 | 3,75 | R/NR | 0040 |
| ASTRA | Yellow | 3 | Yellow (X-estrecha) | R/NR | 0109 |
| ASTRA | Aqua | 3,5/4 | Aqua(Estrecha) | R/NR | 0004 |
| ASTRA | Lilac | 4,5/5 | Lilac (Ancha) | R/NR | 0005 |
| ASTRA | Evolution (Interno) | 3 | 3.0 | R/NR | 0090 |
| ASTRA | Evolution (Interno) | 3,6 | 3.6 | R/NR | 0006 |
| ASTRA | Evolution (Interno) | 4,2 | 4.2 | R/NR | 0007 |
| ASTRA | Evolution (Interno) | 4,8 | 4.8 | R/NR | 0091 |
| ASTRA | Evolution (Interno) | 5,4 | 5.4 | R/NR | 0092 |
| ASTRA | Uniabutment Cono 20o | Regular/Wide | Regular/Wide | R | 0066 |
| ASTRA | Evolution (Cono externo 33°) | | Universal | R | 0008 |
| ASTRA | Multibase Abutment (SmartFix concept) | | Universal | R | 0258 |
| AVINENT | HE/EC | 3,3//3,5/4 | 3,5 | R/NR | 0023 |
| AVINENT | HE/EC | 3,3/3,8/4/4,2/4,8//4,5/5 | 4,1 | R/NR | 0024 |
| AVINENT | HE/EC | 4,8 | 5,1 | R/NR | 0061 |
| AVINENT | HI/IC | 3,1//3,5/4 | 3,5 | R/NR | 0040 |
| AVINENT | HI/IC | 3,3/3,8/4/4,2/4,8//4,5/5 | 4,1 | R/NR | 0040 |
| AVINENT | Transepitelial | | Regular | R | 0025 |
| B&W | Hexágono Externo | 3,75/4 | 4,1 | R/NR | 0024 |
| B&W | Hexágono Externo | 5 | 5 | R/NR | 0058 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-------------|--------------------------------|----------------|----------------|----------|--------------------|
| B&W | Cónico Hexagono Interno CIH | 3,3/4 | 4 | Z10 | 0042 |
| B&W | Cónico Hexagono Interno CIH | 3,3/4 | 4 | R | 0040 |
| BEGO | RS/RSX | 3.0 | 3.0 | R/NR | 0049 |
| BEGO | S/RI/RS/RSX | 3,25/3,75 | 3,67 | R/NR | 0050 |
| BEGO | S/RI/RS/RSX | 4,1 | 4,1 | R/NR | 0051 |
| BEGO | S/RI/RS/RSX | 4,5 | 4,5 | R/NR | 0052 |
| BEGO | S/RI/RS/RSX | 5,5 | 5,5 | R/NR | 0081 |
| BEGO | Mini | 2,7/2,9/3,1 | Mini | R/NR | 0187 |
| BEGO | MultiPlus | | Universal | R | 0150 |
| BIOCONCEPT | BC Tissue Level Standard | 3,3/4,1/4,8 | Regular | R/NR | 0037 |
| BIOCONCEPT | BC Tissue Level Standard Plus | 4,8 | Regular | R/NR | 0037 |
| BIOCONCEPT | BC Tissue Level Tapered Effect | 4,8 | Regular | R/NR | 0037 |
| BIOCONCEPT | BC Bone Level | 3,3 | Narrow | R/NR | 0033 |
| BIOCONCEPT | BC Bone Level | 4,1/4,8 | Regular | R/NR | 0035 |
| BIOCONCEPT | BV Tapered Bone Level | 3,5 | Narrow | R/NR | 0029 |
| BIOCONCEPT | BV Tapered Bone Level | 4/4,5/5 | Regular | R/NR | 0030 |
| BIOGENESIS | 3icon | 3,3 | Mini (Pink) | R/NR | 0023 |
| BIOGENESIS | 3icon | 3,75/4/4,3/4,5 | Regular (Blue) | R/NR | 0024 |
| BIOGENESIS | 3icon | 5/5,5 | Wide (Yellow) | R/NR | 0058 |
| BIOGENESIS | Aticon | 3,5/4/4,5/5 | Blue | R/NR | 0005 |
| BIOGENESIS | Iticon | 3,5/4,1/4,8 | 4,8 | R/NR | 0037 |
| BIOHORIZONS | External | 3,5 | 3,7 (Yellow) | R/NR | 0023 |
| BIOHORIZONS | Tapered Internal | 3,8 | 3,5 (Yellow) | R/NR | 0040 |
| BIOHORIZONS | Tapered Internal | 4,6 | 4,5 (Green) | R/NR | 0041 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-------------|------------------------------|-----------|--------------|----------|--------------------|
| BIOHORIZONS | Tapered Internal | 5,8 | 5,7 (Blue) | R/NR | 0080 |
| BIOHORIZONS | Tapered Plus | 4,6 | 3,5 (Yellow) | R/NR | 0040 |
| BIOHORIZONS | Tapered Plus | 5,8 | 4,5 (Green) | R/NR | 0041 |
| BIOHORIZONS | Mount-free Tapered Internal | 3,8 | 3,5 (Yellow) | R/NR | 0040 |
| BIOHORIZONS | Mount-free Tapered Internal | 4,6 | 4,5 (Green) | R/NR | 0041 |
| BIOHORIZONS | Mount-free Tapered Internal | 5,8 | 5,7 (Blue) | R/NR | 0080 |
| BIOHORIZONS | Tapered Pro | 4,2/4,6 | 3,5 (Yellow) | R/NR | 0040 |
| BIOHORIZONS | Tapered Pro | 5,2 | 4,5 (Green) | R/NR | 0041 |
| BIOHORIZONS | Tapered Short | 4,6 | 3,5 (Yellow) | R/NR | 0040 |
| BIOHORIZONS | Tapered Short | 5,8 | 4,5 (Green) | R/NR | 0041 |
| BIOHORIZONS | Tapered PTG | 4,2 | 3,5 (Yellow) | R/NR | 0040 |
| BIOHORIZONS | Tapered IM (Immediate Molar) | 7/8 | 5,7 (Blue) | R/NR | 0080 |
| BIOHORIZONS | Tapered Tissue Level | 3/3,8 | 3,5 (Yellow) | R/NR | 0040 |
| BIOHORIZONS | Tapered Tissue Level | 4,6 | 4,5 (Green) | R/NR | 0041 |
| BIOHORIZONS | Tapered Tissue Level | 5,8 | 5,7 (Blue) | R/NR | 0080 |
| BIOHORIZONS | Multi Unit | | Universal | R | 0025 |
| BIOLOK | Hexágono Externo | 3,45 | 3,45 | R/NR | 0003 |
| BIOMET 3i | Osseotite External Hex | 3,25 | 3,4 | R/NR | 0003 |
| BIOMET 3i | Osseotite External Hex | 3,75/4 | 4,1 | R/NR | 0024 |
| BIOMET 3i | Osseotite External Hex | 5 | 5 | R/NR | 0058 |
| BIOMET 3i | Certain | 3,25/4 | 3,4 | R/NR | 0001 |
| BIOMET 3i | Certain | 4/5 | 4,1 | R/NR | 0002 |
| BIOMET 3i | Certain | 5 | 5 | R/NR | 0057 |
| BIOMET 3i | Low Profile | | Universal | R | 0025 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-----------------|------------------------|---------------------|--------------------|----------|--------------------|
| BIONER | Ikelt / Bikelt | 3,3/3,75/4 | 4,1 | R/NR | 0024 |
| BIONER | Ikelt | 5 | 5 | R/NR | 0058 |
| BIONER | Hikelt | 3,8 | 3,95 | R/NR | 0040 |
| BIONER | Hikelt | 4,7 | 4,9 | R/NR | 0041 |
| BIONER | TopDM | 3,5 | 3,5 | R/NR | 0021 |
| BIONER | TopDM | 4 | 4 | R/NR | 0021 |
| BIONER | TopDM | 5 | 5 | R/NR | 0021 |
| BIONER | Transepitelial A-5M | Transepitelial A-5M | Regular | R | 0025 |
| BIOTEC | SPR/CIM | 3,75 | 3,75 | R/NR | 0040 |
| BIOTEC | SPR/SPTT/CIM | 4,2 | 4,2 | R/NR | 0040 |
| BIOTEC | SPR/SPTT/CIM | 5 | 5 | R/NR | 0040 |
| BIOTEC | SPR/CIM | 3,3 | 3,3 | NR | 0040 |
| BIOTEC | SPR/CIM | 3,3 | 3,3 | R | 0040 |
| BREDENT MEDICAL | Narrow Sky | 3,5 | NP 3,5 | R/NR | 0110 |
| BREDENT MEDICAL | Blue Sky | 3,5/4/4,5/5,5 | 4 | R/NR | 0111 |
| BREDENT MEDICAL | Blue Sky Classic | 3,5/4/4,5 | 4 | R/NR | 0111 |
| BREDENT MEDICAL | Copa Sky | 3,5/4/4,5/5/6 | 3,3 | R/NR | 0251 |
| BTI | Externa Tiny | 2,5/3/3,3/3,5/3,75 | Tiny 3,5 | R/NR | 0009 |
| BTI | Externa Universal | 3,75/4 | Universal 4,1 | R/NR | 0024 |
| BTI | Externa Universal Plus | 4,5/5 | Universal Plus 4,1 | R/NR | 0024 |
| BTI | Externa | 4,5/5/5,5 | Ancha 5,5 | R/NR | 0060 |
| BTI | Interna Universal | 3,3/3,5/3,75/4/4,25 | Universal 4,1 | R/NR | 0010 |
| BTI | Interna Universal Plus | 4,5/5/5,5 | Universal Plus 4,1 | R/NR | 0010 |
| BTI | Interna Ancha | 5,5/6/6,25 | Ancha 5,5 | R/NR | 0059 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|----------------------------|-------------------------------------|-------------------|---------------|----------|--------------------|
| BTI | Multi-IM | converter 4,1 | Universal 4,1 | R | 0151 |
| BTK | Klassik / Konic | 3,25 | 3,4 EN | R/NR | 0003 |
| BTK | Klassik / Konic | 3,25PL/3,75/4 | 4,1 ER | R/NR | 0024 |
| BTK | IS + | 3,3/3,7/4,1/4,8/6 | DR | R/NR | 0029 |
| BTK | BT Safe BL | 3,3/3,7/4,1/4,8 | KR | R/NR | 0029 |
| BTK | Klassik / Konic | 3,25/4 | 3,5 IR | R/NR | 0040 |
| BTK | Klassik / Konic | 3,25/4 | 3,5 IR | ZIO | 0042 |
| CAMLOG | Camlog Screw-Line/Progressive-Line | 3,3 | 3,3 | R/NR | 0087 |
| CAMLOG | Camlog Screw-Line/Progressive-Line | 3,8 | 3,8 | R/NR | 0011 |
| CAMLOG | Camlog Screw-Line/Progressive-Line | 4,3 | 4,3 | R/NR | 0012 |
| CAMLOG | Camlog Screw-Line/Progressive-Line | 5 | 5 | R/NR | 0088 |
| CAMLOG | Camlog Screw-Line/Progressive-Line | 6 | 6 | R/NR | 0089 |
| CAMLOG | Conelog Screw-Line/Progressive-Line | 3,3 | 3,3 | R/NR | 0119 |
| CAMLOG | Conelog Screw-Line/Progressive-Line | 3,8 | 3,8 | R/NR | 0120 |
| CAMLOG | Conelog Screw-Line/Progressive-Line | 4,3 | 4,3 | R/NR | 0121 |
| CONEXÃO SISTEMA DE PRÓTESE | Flash | 3,5/4,3/5 | Universal | R/NR | 0021 |
| CONEXÃO SISTEMA DE PRÓTESE | Torq | 3,5/3,75/4 | Universal | R/NR | 0021 |
| CONEXÃO SISTEMA DE PRÓTESE | Expand | 3,75/4/5 | Universal | R/NR | 0021 |
| CORTEX | Internal Hex Dynamix | 3,3/3,8/4,2/5/6 | 3,75 | R/NR | 0040 |
| CORTEX | Internal Hex Classix | 3,3/3,8/4,2/5/6 | 3,75 | R/NR | 0040 |
| CORTEX | Internal Hex Saturn | 3,8/4,2 | 3,5 | R/NR | 0040 |
| CORTEX | Conical Dynamix | 3 | NP | R/NR | 0109 |
| CORTEX | Conical Dynamix | 3,3/3,8/4,2 | RP | R/NR | 0004 |
| CORTEX | Conical Dynamix | 5/6 | WP | R/NR | 0005 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-------------|------------------------------|------------------|------------|----------|--------------------|
| CORTEX | Conical Classix | 3,3/3,8/4,2 | RP | R/NR | 0004 |
| CORTEX | Conical Classix | 5/6 | WP | R/NR | 0005 |
| CORTEX | Conical Magix | 3,3/3,8/4,2 | RP | R/NR | 0004 |
| CORTEX | Multi Unit | | Universal | R | 0025 |
| COWELLMEDI | Inno - External Type | 5,0/6,0 | 5,1 | R/NR | 0061 |
| COWELLMEDI | Multi S&A Abutment Ø 4,5 mm | Multi S Abutment | Universal | R | 0193 |
| C-TECH | EL Esthetic Line | 3,8/4,3/5,1 | 4 | R/NR | 0246 |
| C-TECH | Multi Unit | | Universal | R | 0245 |
| DENTAL TECH | Implagic | 4,5 | 4,5 (Blue) | R/NR | 0041 |
| DENTAURUM | Tiologic | 3,3 | Small | R/NR | 0130 |
| DENTAURUM | Tiologic | 3,7/4,2 | Medium | R/NR | 0131 |
| DENTAURUM | Tiologic | 4,8/5,5 | Large | R/NR | 0132 |
| DENTEGRIS | SLS-Straight | 4,5 | 4,5 | R/NR | 0041 |
| DENTEGRIS | Sinus-Lift | 4,5 | 4,5 | R/NR | 0041 |
| DENTEGRIS | S&T Implants | 4,5 | 4,5 | R/NR | 0041 |
| DENTIS | OneQ-SL | 3 | Narrow | R/NR | 0014 |
| DENTIS | OneQ-SL | 3,9/4,2/4,7/5,2 | Regular | R/NR | 0030 |
| DENTIS | OneQ-SL | 6/7/8 | Wide | R/NR | 0030 |
| DENTIS | s-Clean Tapered / Tapered II | 3,7 | Mini | R/NR | 0030 |
| DENTIS | s-Clean Tapered / Tapered II | 4,1/4,3 | Regular | R/NR | 0030 |
| DENTIS | s-Clean Tapered / Tapered II | 4,8 | Wide | R/NR | 0030 |
| DENTIS | s-Clean Straight | 4,1/4,8 | 4,1/4,8 | R/NR | 0030 |
| DENTIS | s-Clean Save | 5,5/6 | 5,5/6 | R/NR | 0030 |
| DENTIS | SQ-SL | 3,5 | Narrow | R/NR | 0014 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|---------|--------------------------|-----------|-----------|----------|--------------------|
| DENTIS | SQ-SL | 4/4,5/5 | Regular | R/NR | 0030 |
| DENTIS | SQ-SL | 6/7/8 | Wide | R/NR | 0030 |
| DENTIS | e-Clean | 3,5 | Mini | R/NR | 0023 |
| DENTIS | e-Clean | 4,1 | Regular | R/NR | 0024 |
| DENTIS | e-Clean | 5,1 | Wide | R/NR | 0061 |
| DENTIS | i-Clean Tapered | 3,7 | Mini | R/NR | 0037 |
| DENTIS | i-Clean Tapered | 4,1/4,3 | Regular | R/NR | 0037 |
| DENTIS | i-Clean Tapered | 4,8 | Wide | R/NR | 0037 |
| DENTIS | i-Clean Straight | 4,1/4,8 | 4,8 | R/NR | 0037 |
| DENTIS | Octa Abutment | Universal | Universal | R/NR | 0074 |
| DENTIUM | NR Line | 3,1 | 3,2 | R/NR | 0190 |
| DENTIUM | NR Line | 3,1 | 3,6 | R/NR | 0190 |
| DENTIUM | NR Line | 3,6 | 3,6 | R/NR | 0191 |
| DENTIUM | NR Line | 4,3 | 4,3 | R/NR | 0191 |
| DENTIUM | NR Line | 5 | 5 | R/NR | 0191 |
| DENTIUM | NR Line | 6 | 6 | R/NR | 0191 |
| DENTIUM | SimpleLine II | 3,8/4,3 | 4,8 | R/NR | 0074 |
| DENTIUM | SimpleLine II | 3,8/4,3 | 4,8 | R/NR | 0037 |
| DENTIUM | SimpleLine II | 4,3/4,8 | 6,5 | R/NR | 0096 |
| DENTIUM | SuperLine and Implantium | 3,4 | 3,6 | R/NR | 0030 |
| DENTIUM | SuperLine and Implantium | 3,8 | 4 | R/NR | 0030 |
| DENTIUM | SuperLine and Implantium | 4,3 | 4,5 | R/NR | 0030 |
| DENTIUM | SuperLine and Implantium | 4,8 | 5 | R/NR | 0030 |
| DENTIUM | SuperLine and Implantium | 4,8 | 6 | R/NR | 0030 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-------------------|-------------------------------------|-----------------------|--------------|----------|--------------------|
| DENTIUM | Multi Unit NR Line | | 5 | R | 0192 |
| DENTIUM | Multi Unit Superline and Implantium | | 4,5 | R | 0193 |
| DIO IMPLANTS | SM System | 4,5/5/5,3 | Regular/Wide | R/NR | 0013 |
| DIO IMPLANTS | UF II Narrow | 3/3,3 | Narrow | R/NR | 0014 |
| DIO IMPLANTS | UF II | 3,8/4/4,5/5/5,5 | Regular | R/NR | 0030 |
| DIO IMPLANTS | External | 3,3/3,8 | Narrow 3,5 | R/NR | 0023 |
| DIO IMPLANTS | External | 3,75/4/4,5 | Regular 4,1 | R/NR | 0024 |
| DIO IMPLANTS | External | 5/5,3/5,5/6 | Wide 5,1 | R/NR | 0061 |
| DIO IMPLANTS | Internal OCTA | | 4,8 | R/NR | 0074 |
| DIO IMPLANTS | Multi Unit | | Universal | R | 0247 |
| DMI DENTAL SUPPLY | DCI/DSI | 3,3/3,5/3,75/4,2/5/6 | 3,75 | R/NR | 0040 |
| DSP BIOMEDICAL | Hexágono Externo | 3,75/4/5//3,5/3,8/4,3 | 4,1 | R/NR | 0024 |
| EASY IMPLANT | Master C | 3,5 | 3,5 (Ocean) | R/NR | 0004 |
| EASY IMPLANT | Master C | 4 | 4 (Ocean) | R/NR | 0004 |
| EASY IMPLANT | Master C | 4,5 | 4,5 (Lilas) | R/NR | 0030 |
| EASY IMPLANT | Master C | 5 | 5 (Lilas) | R/NR | 0030 |
| EASY IMPLANT | Master S | 3,3 | 3,3 (Ocean) | R/NR | 0004 |
| EASY IMPLANT | Master S | 3,75 | 3,75 (Lilas) | R/NR | 0030 |
| EASY IMPLANT | Master S | 4,25 | 4,25 (Lilas) | R/NR | 0030 |
| EASY IMPLANT | Master S | 4,75 | 4,75 (Lilas) | R/NR | 0030 |
| EASY IMPLANT | Master L | 3,3 | 3,3 (Lilas) | R/NR | 0030 |
| EASY IMPLANT | Master L | 3,75 | 3,75 (Lilas) | R/NR | 0030 |
| EASY IMPLANT | Master L | 4,25 | 4,25 (Lilas) | R/NR | 0030 |
| EASY IMPLANT | Master L | 4,75 | 4,75 (Lilas) | R/NR | 0030 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|--------------|-----------------------------|---------------|-----------|----------|--------------------|
| EASY IMPLANT | Hexcel-S | 3,3 | 3,3 | R/NR | 0003 |
| EASY IMPLANT | Hexcel-S | 3,75 | 4,1 | R/NR | 0024 |
| EASY IMPLANT | Hexcel-S | 4,25 | 4,1 | R/NR | 0024 |
| EASY IMPLANT | Hexcel-S | 4,75 | 5 | R/NR | 0058 |
| EASY IMPLANT | MINI | 3 | 3 | NR | 0176 |
| EASY IMPLANT | Multi Unit Conical Abutment | | Universal | R | 0025 |
| ECKERMANN | Hexagon | 3/3,5/4/4,5/5 | 4,1 | R/NR | 0024 |
| ECKERMANN | Winner | 3/3,5/4 | 3,5 | R/NR | 0040 |
| ECKERMANN | Winner | 4/4,5/5 | 4,5 | R/NR | 0041 |
| ECKERMANN | Winner | 3/3,5/4 | 3,5 | ZIO | 0042 |
| ECKERMANN | Winner | 4/4,5/5 | 4,5 | ZIO | 0043 |
| ELITE MEDICA | Conexión Externa | 3,75 | Narrow | R/NR | 0023 |
| ELITE MEDICA | Conexión Externa | 4 | Regular | R/NR | 0024 |
| ELITE MEDICA | Conexión Externa | 5 | Wide | R/NR | 0061 |
| EUROTEKNIKA | Naturactis | 3,5 | 3,4 | R/NR | 0004 |
| EUROTEKNIKA | Naturactis | 4 | 3,8 | R/NR | 0004 |
| EUROTEKNIKA | Naturactis | 4,5 | 4,3 | R/NR | 0004 |
| EUROTEKNIKA | Naturactis | 5 | 4,8 | R/NR | 0004 |
| EUROTEKNIKA | Uneva | 3,6 | 4,1 | R/NR | 0024 |
| EUROTEKNIKA | Uneva | 4,1 | 4,1 | R/NR | 0024 |
| EUROTEKNIKA | Uneva (Platform Switching) | 4,8 | 4,1 | R/NR | 0024 |
| EUROTEKNIKA | Uneva (Platform Switching) | 6 | 4,1 | R/NR | 0024 |
| EUROTEKNIKA | Natea | 3,6/4,1/4,8 | Narrow | R/NR | 0004 |
| EUROTEKNIKA | Natea | 3,6/4,1/4,8 | Regular | R/NR | 0004 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-------------------------------|--|-----------------|--------------|----------|--------------------|
| EUROTEKNIKA | Natea | 6 | Wide | R/NR | 0004 |
| EUROTEKNIKA | Aesthetica | 4,1 | 4,8 | R/NR | 0074 |
| EUROTEKNIKA | Aesthetica | 4,1 | 4,8 | R/NR | 0037 |
| EUROTEKNIKA | Aesthetica | 4,8 | 6,5 | R/NR | 0096 |
| EUROTEKNIKA | Naturall | 3,5 | Narrow | R/NR | 0004 |
| EUROTEKNIKA | Naturall | 4/4,5 | Regular | R/NR | 0004 |
| EUROTEKNIKA | Naturall | 5 | Wide | R/NR | 0004 |
| EUROTEKNIKA | Multi Unit Tetra | Universal | Universal | R | 0025 |
| F&B IMPLANT (FIT & BRILLIANT) | FA Submerged Fixture | 3,9 | Narrow | R/NR | 0030 |
| F&B IMPLANT (FIT & BRILLIANT) | FA Submerged Fixture | 4,1/4,4 | Regular | R/NR | 0030 |
| F&B IMPLANT (FIT & BRILLIANT) | FA Submerged Fixture | 4,8 | Wide | R/NR | 0030 |
| F&B IMPLANT (FIT & BRILLIANT) | FA Submerged Fixture | 5,3/5,8/6,3/6,8 | Ultra-Wide | R/NR | 0030 |
| GALIMPLANT | Conexión Externa | 3,5/4 | 4 | R/NR | 0024 |
| GALIMPLANT | Conexión Interna | 3,5 | 3,5 | R/NR | 0004 |
| GALIMPLANT | Conexión Interna | 4 | 4 | R/NR | 0004 |
| GALIMPLANT | Conexión Interna | 5 | 5 | R/NR | 0004 |
| GALIMPLANT | Pilar multi-posicion recto/Pilar multi-posicion angulado | Universal | Universal | R | 0025 |
| GC TECH | AADVA Standard / Tapered Implants | 3,3 | Narrow | R/NR | 0196 |
| GC TECH | AADVA Standard / Tapered Implants | 4 | Regular | R/NR | 0197 |
| GC TECH | AADVA Standard / Tapered Implants | 5 | Wide | R/NR | 0198 |
| GLOBAL D (TEKKA) | In-Kone Universal | 3,5/4/4,5/5 | Universal | R/NR | 0152 |
| GLOBAL D (TEKKA) | In-Kone Primo | 3,5/4/4,5/5 | Universal | R/NR | 0152 |
| GMI (ILERIMPLANT) | Phoenix | 3,3/3,75/4 | Standard 4,1 | R/NR | 0024 |
| GMI (ILERIMPLANT) | Phoenix | 5 | Wide 5,1 | R/NR | 0061 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|--------------------------|------------------------------|---------------------|-----------|----------|--------------------|
| GMI (ILERIMPLANT) | Frontier | 3,3/3,75/4,25 | RP 3,3 | R/NR | 0040 |
| GMI (ILERIMPLANT) | Frontier | 4,75/5,75 | WP 4,3 | R/NR | 0041 |
| GMI (ILERIMPLANT) | Universal | Universal | PS-RP 4,8 | R | 0025 |
| GT MEDICAL | Best Fit Octógono Interno | 3,7/4,3/4,8 | Regular | R/NR | 0074 |
| GT MEDICAL | Best Fit Octógono Interno | 3,7/4,3/4,8 | Regular | R/NR | 0037 |
| GT MEDICAL | Best Fit Hexágono Interno | 3,7/4,1/4,3/4,8 | Wide | R/NR | 0005 |
| GT MEDICAL | Best Fit Hexágono Externo | 3,5 | Narrow | R/NR | 0023 |
| GT MEDICAL | Best Fit Hexágono Externo | 4,1 | Regular | R/NR | 0024 |
| GT MEDICAL | Best Fit Hexágono Externo | 5,1 | Wide | R/NR | 0061 |
| HAHN IMPLANT (GLIDEWELL) | Hahn Tapered Implant | 3,5/4,3 | 3,5/4,3 | R/NR | 0021 |
| HAHN IMPLANT (GLIDEWELL) | Hahn Tapered Implant | 5 | 5 | R/NR | 0022 |
| HAHN IMPLANT (GLIDEWELL) | Hahn Tapered Implant | 7 | 7 | R/NR | 0124 |
| HAHN IMPLANT (GLIDEWELL) | Multi-Unit Abutment system | Universal | Universal | R | 0025 |
| HIOSSSEN | ETII SA / ETIII SA | 3,5 | Mini | R/NR | 0029 |
| HIOSSSEN | ETII SA / ETIII SA / ETIV SA | 4/4,5/5 | Regular | R/NR | 0030 |
| HIOSSSEN | ETIII BA | 3,5 | Mini | R/NR | 0029 |
| HIOSSSEN | ETIII BA | 4/4,5/5 | Regular | R/NR | 0030 |
| HI-TEC | Tapered Self Thread | 3,3/3,75 | 3,5 | R/NR | 0040 |
| HI-TEC | Tapered Self Thread | 4,2/5 | 4,5 | R/NR | 0041 |
| HI-TEC | Logic Plus | 3,5 | 3,7 | R/NR | 0040 |
| HI-TEC | Logic Plus | 4,3 | 3,9 | R/NR | 0040 |
| IBS | Magic FC | 4/4,5/5/5,5/6/6,5 | 3,8 | R/NR | 0030 |
| IBS | N.R. Fix | 3/3,5 | 3,8 | R/NR | 0030 |
| IDO IMPLANTS | I Do Implant | 3,8/4/4,5/5/5,5/6/7 | Universal | R/NR | 0030 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-------------------------|-----------------------------|----------------|------------|----------|--------------------|
| IHDE DENTAL (IMBIODENT) | Bone Level Plus | 3,3 | 3,3 | R/NR | 0033 |
| IHDE DENTAL (IMBIODENT) | Bone Level Plus | 4,1 | 4,1 | R/NR | 0035 |
| IHDE DENTAL (IMBIODENT) | Bone Level Plus | 4,8 | 4,8 | R/NR | 0035 |
| IMPLANT DIRECT | RePlus / Replant / Reactive | 3,5/3,7/4,2 | 3,5 | R/NR | 0026 |
| IMPLANT DIRECT | RePlus / Replant / Reactive | 4,3/4,7 | 4,3 | R/NR | 0027 |
| IMPLANT DIRECT | RePlus / Replant / Reactive | 5/5,7 | 5 | R/NR | 0028 |
| IMPLANT DIRECT | Legacy | 3,7/4,2 | 3,5 | R/NR | 0040 |
| IMPLANT DIRECT | Legacy | 4,7/5,2 | 4,5 | R/NR | 0041 |
| IMPLANT DIRECT | Swishplant / Swishplus | 4,1/4,8 | 4,8 | R/NR | 0074 |
| IMPLANT DIRECT | Swishplant / Swishplus | 4,1/4,8 | 4,8 | R/NR | 0037 |
| IMPLANT DIRECT | Swishplant / Swishplus | 4,8/5,7 | 6,5 | R/NR | 0096 |
| IMPLANT DIRECT | SwishActive | 3,3 | 3 | R/NR | 0021 |
| IMPLANT DIRECT | SwishActive | 4,1/4,8 | 3,4 | R/NR | 0022 |
| IMPLANT DIRECT | Interactive | 3,2/3,7 | 3 | R/NR | 0021 |
| IMPLANT DIRECT | Interactive | 4,3/5 | 3,4 | R/NR | 0022 |
| IMPLANT DIRECT | Simply Iconic | 3,2/3,7/4,2 | Purple 3.0 | R/NR | 0021 |
| IMPLANT DIRECT | Simply Iconic | 4,7/5,2/5,7 | Gold 3.4 | R/NR | 0022 |
| IMPLANT GENESIS | Aktiv System | 3,5/3,75/4,2/5 | Standard | R/NR | 0040 |
| IMPLANTSWISS | Bone Level | 3,3 | 3,3 | R/NR | 0004 |
| IMPLANTSWISS | Bone Level | 3,7 | 3,7 | R/NR | 0030 |
| IMPLANTSWISS | Bone Level | 4,3 | 4,3 | R/NR | 0030 |
| IMPLANTSWISS | Bone Level | 4,8 | 4,8 | R/NR | 0030 |
| IMPLANTSWISS | Bone Level | 5,5 | 5,5 | R/NR | 0030 |
| IMPLANTSWISS | Multi Unit Abutment | Universal | 4,8 | R | 0025 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-------------|------------------------------|-----------|-----------|----------|--------------------|
| INTRA-LOCK | Unihex | 4 | Regular | R/NR | 0024 |
| INTRA-LOCK | Unihex | 4,75 | Wide | R/NR | 0024 |
| INTRA-LOCK | IntraHex | 3,75/4 | 3,5 | R/NR | 0040 |
| INTRA-LOCK | IntraHex | 4,75 | 4,5 | R/NR | 0041 |
| JDENTALCARE | JDEvolution/JDEvolution Plus | 3,7 | 3,7 | R/NR | 0040 |
| JDENTALCARE | JDEvolution/JDEvolution Plus | 4,3/5 | 4 | R/NR | 0040 |
| JDENTALCARE | JDEvolution/JDEvolution Plus | 6 | 5 | R/NR | 0040 |
| JDENTALCARE | JD Pterygo | 4 | 4 | R/NR | 0040 |
| JDENTALCARE | JD ICON | 3,9 | 3,9 | R/NR | 0022 |
| JDENTALCARE | JD ICON | 4,3 | 4 | R/NR | 0022 |
| JDENTALCARE | JD ICON | 5 | 4,7 | R/NR | 0022 |
| JDENTALCARE | JD ICON Plus | 3,7 | 3,7 | R/NR | 0015 |
| JDENTALCARE | JD ICON Plus | 4,3 | 4 | R/NR | 0015 |
| JDENTALCARE | JD ICON Plus | 5 | 4,8 | R/NR | 0015 |
| JDENTALCARE | JD ICON Plus T | 3,5 | 3,5 | R/NR | 0015 |
| JDENTALCARE | JD ICON Plus T | 4 | 3,5 | R/NR | 0015 |
| JDENTALCARE | JD ICON Plus T | 4,5 | 3,5 | R/NR | 0015 |
| JDENTALCARE | Conical Abutment | | Universal | R | 0025 |
| KEYSTONE | Restore | 3,75/4 | RD 4,1 | R/NR | 0024 |
| KEYSTONE | Internal TiLobe PrimaConnex | 3,3/3,5 | 3,5 | R/NR | 0044 |
| KEYSTONE | Internal TiLobe PrimaConnex | 4/4,1 | 4,1 | R/NR | 0045 |
| KEYSTONE | Internal TiLobe PrimaConnex | 5 | 5 | R/NR | 0046 |
| KEYSTONE | Internal TiLobe Prima Plus | 3,5 | 3,5 | R/NR | 0044 |
| KEYSTONE | Internal TiLobe Prima Plus | 4,1 | 4,1 | R/NR | 0045 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-----------|----------------------------|-----------|---------------|----------|--------------------|
| KEYSTONE | Internal TiLobe Prima Plus | 5/6 | 5 | R/NR | 0046 |
| KLOCKNER | Essential Cone | 3,5/4/4,5 | 4,5 | R/NR | 0054 |
| KLOCKNER | KL | 3,3 | Narrow | R/NR | 0023 |
| KLOCKNER | KL | 3,7/4,2 | Regular | R/NR | 0024 |
| KLOCKNER | KL | 4,7 | Wide | R/NR | 0061 |
| KLOCKNER | Vega | 3,5 | NV | R/NR | 0082 |
| KLOCKNER | Vega | 4/4,5 | RV | R/NR | 0083 |
| KLOCKNER | Vega+ | 3,6 | NV | R/NR | 0082 |
| KLOCKNER | Vega+ | 4,1/4,6 | RV | R/NR | 0083 |
| KLOCKNER | Multi Unit Permanent | 4,2 | Universal | R | 0173 |
| LASAK | Bioniq | 2,9 | QN (Amarillo) | R/NR | 0166 |
| LASAK | Bioniq | 3,5 | QR (Azul) | R/NR | 0167 |
| LASAK | Bioniq | 4 | QR (Azul) | R/NR | 0167 |
| LASAK | Bioniq | 5 | QR (Azul) | R/NR | 0167 |
| LEADER | Tixos Internal Hex | 3,3 | 3,5 | R/NR | 0040 |
| LEADER | Tixos Internal Hex | 3,75 | 4 | R/NR | 0040 |
| LEADER | Tixos External Hex | 3,3/3,75 | 4,1 | R/NR | 0024 |
| LEADER | Tixos External Hex | 5 | 5 | R/NR | 0058 |
| MEDENTIKA | Multi Unit | | Universal | R | 0025 |
| MEDENTIS | Premium/Active Master | 3,3 | 3,3 (Pink) | R/NR | 0249 |
| MEDENTIS | Premium/Active Master | 3,75 | 3,75 (Red) | R/NR | 0125 |
| MEDENTIS | Premium/Active Master | 4,1 | 4,1 (Green) | R/NR | 0125 |
| MEDENTIS | Premium/Active Master | 4,8 | 4,8 (Blue) | R/NR | 0125 |
| MEGAGEN | AnyRidge | 3,5 | Small | R/NR | 0015 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-----------|-------------------|-------------------|---------------|----------|--------------------|
| MEGAGEN | AnyRidge | 4/4,5 | Regular | R/NR | 0015 |
| MEGAGEN | AnyRidge | 5/5,5 | Wide | R/NR | 0015 |
| MEGAGEN | AnyOne Internal | 3,5/4/4,5/5/6/7 | General | R/NR | 0030 |
| MEGAGEN | AnyOne External | 3,5 | Small 3,5 | R/NR | 0023 |
| MEGAGEN | AnyOne External | 4 | Regular 4,1 | R/NR | 0024 |
| MEGAGEN | AnyOne External | 4,5 | Regular 4,5 | R/NR | 0024 |
| MEGAGEN | AnyOne External | 5 | Wide 5 | R/NR | 0058 |
| MEGAGEN | AnyOne External | 6 | SuperWide 5,5 | R/NR | 0058 |
| MEGAGEN | Cone Abutment | Universal | 4,8 | R/NR | 0074 |
| MEGAGEN | Mini Narrow Ridge | 3/3,4 | Mini | R/NR | 0014 |
| MEGAGEN | ExFeel | 3,5 | Small | R/NR | 0037 |
| MEGAGEN | ExFeel | 4,1 | Regular | R/NR | 0037 |
| MEGAGEN | ExFeel | 4,8/5 | Wide | R/NR | 0037 |
| MEGAGEN | Cone Abutment | Universal | 3,8 | R | 0128 |
| MEGAGEN | Multi Unit N Type | Multi Unit N Type | Universal | R | 0025 |
| MICRODENT | Universal | 2,8/3,25 | 3,5 | R/NR | 0003 |
| MICRODENT | Universal | 3,3/3,5/3,75/4 | 4,1 | R/NR | 0024 |
| MICRODENT | Universal | 4,2/5 | 5,1 | R/NR | 0058 |
| MICRODENT | System | 2,8/3,25 | 3,5 | R/NR | 0003 |
| MICRODENT | Ektos | 3,7/4,2 | 3,5 | R/NR | 0040 |
| MIS | Lance | 3,75/4,2 | Standard | R/NR | 0024 |
| MIS | Lance | 5 | Wide | R/NR | 0058 |
| MIS | Seven | 3,3 | Narrow | R/NR | 0019 |
| MIS | Seven | 3,75/4,2 | Standard | R/NR | 0040 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|--------------------|-------------------------------|---------------|--------------|----------|--------------------|
| MIS | Seven | 5/6 | Wide | R/NR | 0041 |
| MIS | M4 | 3,3 | Narrow | R/NR | 0019 |
| MIS | M4 | 3,75/4,2 | Standard | R/NR | 0040 |
| MIS | M4 | 5/6 | Wide | R/NR | 0041 |
| MIS | C1 | 3,3 | Narrow | R/NR | 0016 |
| MIS | C1 | 3,75/4,2 | Standard | R/NR | 0017 |
| MIS | C1 | 5 | Wide | R/NR | 0018 |
| MIS | V3 | 3,9/4,3/5 | Standard | R/NR | 0017 |
| MIS | Multi-Unit | | General | R | 0020 |
| MOZO-GRAU (TICARE) | MG Osseous | 3,3 | 3,4 Mini | R/NR | 0003 |
| MOZO-GRAU (TICARE) | MG Osseous | 3,4/3,75/4,25 | 4,1 Standard | R/NR | 0024 |
| MOZO-GRAU (TICARE) | MG Osseous | 5 | 5 Maxi | R/NR | 0061 |
| MOZO-GRAU (TICARE) | MG Inhex | 3,3 | 2,3 Mini | R/NR | 0109 |
| MOZO-GRAU (TICARE) | MG Inhex | 3,75/4,25 | 2,8 Standard | R/NR | 0004 |
| MOZO-GRAU (TICARE) | MG Inhex | 5 | 3,8 Maxi | R/NR | 0005 |
| MPI | Conexión Externa HE Privilege | 3,3 | 3,5 | R/NR | 0009 |
| MPI | Conexión Externa HE Privilege | 3,3/4 | 4,1 | R/NR | 0024 |
| MPI | Conexión Externa HE Privilege | 5 | 5 | R/NR | 0058 |
| MPI | Privilege CM | 3,5/4 | Regular | R/NR | 0004 |
| MPI | Privilege CM | 5 | Wide | R/NR | 0005 |
| MPI | Excellence CM | 3,5/4 | Regular | R/NR | 0004 |
| MPI | Excellence CM | 5 | Wide | R/NR | 0005 |
| NEOBIOTECH | EB External System | 3,5 | Narrow | R/NR | 0023 |
| NEOBIOTECH | IS Implant System | 3,2 | S-Narrow | R/NR | 0029 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|---------------|--|--|------------|----------|--------------------|
| NEOBIOTECH | IS Implant System | 3,5 | Narrow | R/NR | 0030 |
| NEOBIOTECH | IS Implant System | 4 | Regular | R/NR | 0030 |
| NEOBIOTECH | IS Implant System | 4,5 | Regular | R/NR | 0030 |
| NEOBIOTECH | IS Implant System | 5 | Wide | R/NR | 0030 |
| NEOBIOTECH | IS Implant System | | 4,8 | R | 0025 |
| NEODENT | Helix GM/Drive GM/Titamax GM | 3,5/3,75/4/4,3/5/6 | Regular | R/NR | 0186 |
| NEODENT | Smart HE | 3,75/4 | 4,1 | R/NR | 0024 |
| NEODENT | Mini Pilar CM / Mini Pilar Angulado CM | Mini Pilar CM / Mini Pilar Angulado CM | Universal | R | 0025 |
| NEOSS | ProActive Straight/Tapered/Edge | 3,5 Green | Standard | R/NR | 0047 |
| NEOSS | ProActive Straight/Tapered/Edge | 4 Yellow | Standard | R/NR | 0047 |
| NEOSS | ProActive Straight/Tapered/Edge | 4,5 Blue | Standard | R/NR | 0048 |
| NEOSS | ProActive Straight/Tapered/Edge | 5 Peach | Standard | R/NR | 0048 |
| NEOSS | ProActive Straight/Tapered/Edge | 5,5 Lilac | Standard | R/NR | 0048 |
| NEOSS | ProActive Wide | 6 | Standard | R/NR | 0048 |
| NEOSS | ProActive Sinus | 6,5 | Standard | R/NR | 0048 |
| NEOSS | Short Implant | 3,5/4/4,5 | Standard | R/NR | 0047 |
| NEOSS | Short Implant | 5/5,5/6/6,5 | Standard | R/NR | 0048 |
| NOBEL BIOCARE | Branemark | 3,3 | Narrow | R/NR | 0023 |
| NOBEL BIOCARE | Branemark | 3,75/4 | Regular | R/NR | 0024 |
| NOBEL BIOCARE | Branemark | 5/6 | Wide | R/NR | 0061 |
| NOBEL BIOCARE | Replace | 3,5 | Narrow | R/NR | 0026 |
| NOBEL BIOCARE | Replace | 4,3 | Regular | R/NR | 0027 |
| NOBEL BIOCARE | Replace | 5 | Wide | R/NR | 0028 |
| NOBEL BIOCARE | Replace | 6 | Platform 6 | R/NR | 0129 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|----------------|-----------------------------------|---------------------|-------------|----------|--------------------|
| NOBEL BIOCARE | Active/Replace Conical Connection | 3 | Mini 3.0 | R/NR | 0159 |
| NOBEL BIOCARE | Active/Replace Conical Connection | 3,5 | Narrow | R/NR | 0021 |
| NOBEL BIOCARE | Active/Replace Conical Connection | 4,3/5 | Regular | R/NR | 0022 |
| NOBEL BIOCARE | Active/Replace Conical Connection | 5,5 | Wide | R/NR | 0124 |
| NOBEL BIOCARE | NobelSpeedy | 3,3 | Narrow | R/NR | 0023 |
| NOBEL BIOCARE | NobelSpeedy | 4/5 | Regular | R/NR | 0024 |
| NOBEL BIOCARE | NobelSpeedy | 5/6 | Wide | R/NR | 0061 |
| NOBEL BIOCARE | NobelParallel | 3,75 | Narrow | R/NR | 0021 |
| NOBEL BIOCARE | NobelParallel | 4,3/5 | Regular | R/NR | 0022 |
| NOBEL BIOCARE | NobelParallel | 5,5 | Wide | R/NR | 0124 |
| NOBEL BIOCARE | Multi-Unit | Regular | Regular | R | 0025 |
| NORIS MEDICAL | Tuff | 3,3/3,75/4,2/5/6 | 3,75 | R/NR | 0040 |
| NORIS MEDICAL | Tuff TT | 3,3/3,75/4,2/5/6 | 3,75 | R/NR | 0040 |
| NORIS MEDICAL | Onix | 3,3/3,75/4,2/5/6 | 3,75 | R/NR | 0040 |
| NORIS MEDICAL | Cortical | 4,0/5/6 | 3,75 | R/NR | 0040 |
| NORIS MEDICAL | PteryCore | 4,2 | 3,75 | R/NR | 0040 |
| NORIS MEDICAL | PteryFit | 4,2 | 3,75 | R/NR | 0040 |
| NORMON | Normoimplant HE | 3,25/3,75/4,25/4,75 | 4,1 | R/NR | 0024 |
| NORMON | Normoimplant HI | 3,75/4,25/4,75 | 3,5 | R/NR | 0040 |
| NOVA IMPLANTS | PSI/PCI | 3,3/3,75/4,2/5/6 | 3,75 | R/NR | 0040 |
| OSSTEM IMPLANT | TS | 3,5 | Mini 3,5 | R/NR | 0029 |
| OSSTEM IMPLANT | TS | 4/4,5/5/6/7 | Regular | R/NR | 0030 |
| OSSTEM IMPLANT | US | 3,3/3,5 | Mini 3,5 | R/NR | 0023 |
| OSSTEM IMPLANT | US | 3,75/4/4,5 | Regular 4,1 | R/NR | 0024 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|----------------|------------------|------------------|---------------|----------|--------------------|
| OSSTEM IMPLANT | US | 5/5,5 | Wide 5,1 | R/NR | 0061 |
| OSSTEM IMPLANT | US | 5/5,5 | Wide PS 5 | R/NR | 0058 |
| OSTEOPLUS | She | 3,45 | 3,45 | R/NR | 0009 |
| OSTEOPLUS | She | 3,75 / 4 | 4 | R/NR | 0024 |
| OSTEOPLUS | Shi | 3,3 / 3,75 / 4,2 | 3,5 | R/NR | 0040 |
| OXY | K1 Line | 3,5/4/4,5/5 | Regular | R/NR | 0015 |
| OXY | K1 Line | 5,5/6/6,5 | Wide | R/NR | 0015 |
| OXY | PSK Line | 3,5/4/4,5/5 | Regular | R/NR | 0015 |
| OXY | MD Line KONE | 3,75/4,25/5 | Regular | R/NR | 0015 |
| OXY | MD Line Ext | 3,75/4,25 | Standard | R/NR | 0024 |
| PALTOP | Advanced classic | 3,25 | Narrow (blue) | R/NR | 0229 |
| PALTOP | Advanced classic | 6 | Wide (purple) | R/NR | 0041 |
| PALTOP | Advanced + | 3,25 | Narrow (blue) | R/NR | 0229 |
| PALTOP | Advanced + | 6 | Wide (purple) | R/NR | 0041 |
| PALTOP | Dynamic | 3,25 | Narrow (blue) | R/NR | 0229 |
| PALTOP | Dynamic | 6 | Wide (purple) | R/NR | 0041 |
| PALTOP | Conical Active | 3,25/3,75/4,2/5 | Standard | R/NR | 0029 |
| PALTOP | Advanced classic | 3,75/4,2/5 | Standard | Z10 | 0042 |
| PALTOP | Advanced + | 3,75/4,2/5 | Standard | Z10 | 0042 |
| PALTOP | Dynamic | 3,75/4,2/5 | Standard | Z10 | 0042 |
| PALTOP | DIVA/ACTIVE | 3,75/4,2/5 | Standard | Z10 | 0042 |
| PALTOP | Advanced classic | 3,75/4,2/5 | Standard | R | 0040 |
| PALTOP | Advanced + | 3,75/4,2/5 | Standard | R | 0040 |
| PALTOP | Dynamic | 3,75/4,2/5 | Standard | R | 0040 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-----------|-----------------------------------|--------------------------|----------------|----------|--------------------|
| PALTOP | DIVA/ACTIVE | 3,75/4,2/5 | Standard | R | 0040 |
| PALTOP | Universal Multi-Unit | Multi-Unit | Universal | R | 0181 |
| PHIBO | TSH/BNT Serie 3 | 3,6 | 4 | R/NR | 0024 |
| PHIBO | TSH/BNT Serie 4 | 4,2 | 4 | R/NR | 0024 |
| PROCLINIC | Cilindrico Externo/Cónico Externo | 3,75/4,25//3,5/4 | 4,1 Estandar | R/NR | 0024 |
| PROCLINIC | Cilindrico Externo/Cónico Externo | 5 | 5 Maxi | R/NR | 0058 |
| PROCLINIC | Cilindrico Interno/Cónico Interno | 3,3/3,75/4,25/5//3,5/4/5 | 3,5 | R/NR | 0040 |
| PROCLINIC | SP Octa | 3,3/4,1/4,8 | 4,8 | R/NR | 0074 |
| PROCLINIC | SP Octa | 3,3/4,1/4,8 | 4,8 | R/NR | 0037 |
| PROCLINIC | SP Octa | 4,8 | 6,5 | R/NR | 0096 |
| PROCLINIC | Aqua CM | 3,5/4/5 | 2,82 | R/NR | 0004 |
| RADHEX | PHE | 3,5 | 3,5 | R/NR | 0023 |
| RADHEX | PHE | 4/4,5/5 | 4,1 | R/NR | 0024 |
| RADHEX | PHI | 3,75 | 3,5 | R/NR | 0040 |
| RADHEX | PHI | 4,5/5 | 4,5 | R/NR | 0041 |
| REFLECT | Rapid | 3.0 | 3.0 | R/NR | 0159 |
| REFLECT | Rapid | 3,5 | NP | R/NR | 0021 |
| REFLECT | Rapid | 4,3/5/5,5 | RP | R/NR | 0022 |
| REFLECT | Recover | 3,5 | NP | R/NR | 0021 |
| REFLECT | Recover | 4,3/5 | RP | R/NR | 0022 |
| REFLECT | Aspire | 3,5/4 | Aqua(Estrecha) | R/NR | 0004 |
| REFLECT | Aspire | 5 | Lilac (Ancha) | R/NR | 0005 |
| REFLECT | Tapered Screw | 3,5 | 3,5 | R/NR | 0040 |
| REFLECT | Tapered Screw | 4,1/4,7 | 4,5 | R/NR | 0041 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-------------------|-----------------------------|-------------|-----------|----------|--------------------|
| SEWON MEDIX | IH2 SLA SYSTEM | 3,5 | Mini | R/NR | 0029 |
| SEWON MEDIX | IH2 SLA SYSTEM | 3,5/4/4,5/5 | Regular | R/NR | 0030 |
| SEWON MEDIX | IH2 RBM SYSTEM | 3,5 | Mini | R/NR | 0029 |
| SEWON MEDIX | IH2 RBM SYSTEM | 3,5/4/4,5/5 | Regular | R/NR | 0030 |
| SEWON MEDIX | IH SYSTEM | 3,5/4/4,5/5 | Universal | R | 0025 |
| SIC INVENT | HEXAGONAL SYSTEM SICace | 3,4/4 | 3,3 | R/NR | 0170 |
| SIC INVENT | HEXAGONAL SYSTEM SICace | 4,5/5 | 4,2 | R/NR | 0171 |
| SIC INVENT | HEXAGONAL SYSTEM SICMax | 3,4/4,2 | 3,3 | R/NR | 0170 |
| SIC INVENT | HEXAGONAL SYSTEM SICMax | 4,7/5,2 | 4,2 | R/NR | 0171 |
| SIC INVENT | HEXAGONAL SYSTEM SICtapered | 3,4/4,2 | 3,3 | R/NR | 0170 |
| SIC INVENT | HEXAGONAL SYSTEM SICtapered | 4,7/5,2 | 4,2 | R/NR | 0171 |
| SIGNO VINCES | Duo | 4,6 | 4,1 | R/NR | 0024 |
| SIGNO VINCES | Inttegra | 3,75/4 | 4,1 | R/NR | 0024 |
| SIGNO VINCES | Compact | 4,5 | CM3,8 | R/NR | 0004 |
| SIGNO VINCES | Duocon | 3,8 | CM3,8 | R/NR | 0004 |
| SIGNO VINCES | Duocon | 4,6/5,5 | CM4,6 | R/NR | 0005 |
| SIGNO VINCES | Infra | 3,3/3,8/4,6 | CM | R/NR | 0004 |
| SIN IMPLANTS | HI SW | 3,8 | 3,8 | R/NR | 0039 |
| SIN IMPLANTS | Tryon | 3,25/3,75/4 | 4,1 | R/NR | 0024 |
| SIN IMPLANTS | Tryon CO | 4 | 4,1 | R/NR | 0024 |
| SIN IMPLANTS | Revolution | 3,25/3,75/4 | 4,1 | R/NR | 0024 |
| SIN IMPLANTS | Stylus | 4 | 4,1 | R/NR | 0024 |
| SOUTHERN IMPLANTS | Tri-Nex | 3,5 | 3,5 | R/NR | 0026 |
| SOUTHERN IMPLANTS | Tri-Nex | 4,3 | 4,3 | R/NR | 0027 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-------------------|-----------------------|-----------------|-------------|----------|--------------------|
| SOUTHERN IMPLANTS | Tri-Nex | 5 | 5 | R/NR | 0028 |
| SOUTHERN IMPLANTS | Tri-Nex | 6 | 6 | R/NR | 0129 |
| SOUTHERN IMPLANTS | IT Connection | 3,3/4/4,1/4,9/5 | 4,8 | R/NR | 0037 |
| SOUTHERN IMPLANTS | IT Connection | 4,9/5/6 | 6,5 | R/NR | 0096 |
| SOUTHERN IMPLANTS | External Hex | 3,25 | 3,4 | R/NR | 0003 |
| SOUTHERN IMPLANTS | External Hex | 3,75/4 | 4,1 | R/NR | 0024 |
| SOUTHERN IMPLANTS | External Hex | 4,7/5 | 5 | R/NR | 0058 |
| SOUTHERN IMPLANTS | External Hex | 5,7/6 | 6 | R/NR | 0058 |
| SOUTHERN IMPLANTS | Deep Conical | 3 | 2,45 | R/NR | 0109 |
| SOUTHERN IMPLANTS | Deep Conical | 3,5/4 | 2,95/3,1 | R/NR | 0004 |
| SOUTHERN IMPLANTS | Deep Conical | 5 | 4,1 | R/NR | 0005 |
| SOUTHERN IMPLANTS | Internal Hex | 3,75/4,2/5 | Universal | R/NR | 0040 |
| SOUTHERN IMPLANTS | Provata | 4/5/6 | Standard | R/NR | 0040 |
| SOUTHERN IMPLANTS | Compact Conical | 4,8 | 4,8 | R | 0025 |
| STERI-OSS | Hex-Loc | 3,25 | 3,3 | R/NR | 0023 |
| STERNGOLD | STERN EX | 3,75/4/5 | 4,1 | R/NR | 0024 |
| STRAUMANN | Tissue Level | 3,3 | 3,5 | R/NR | 0160 |
| STRAUMANN | Tissue Level | 3,3/4,1/4,8 | Regular 4,8 | R/NR | 0037 |
| STRAUMANN | Tissue Level | 4,8 | Wide 6,5 | R/NR | 0096 |
| STRAUMANN | Synocta | | Regular 4,8 | R/NR | 0074 |
| STRAUMANN | Synocta | | Wide 6,5 | R/NR | 0137 |
| STRAUMANN | Bone Level Tapered SC | 2,9 | SC- 2,9 | R/NR | 0135 |
| STRAUMANN | Bone Level | 3,3 | NC- 3,3 | R/NR | 0033 |
| STRAUMANN | Bone Level | 4,1 | RC-4,1 | R/NR | 0035 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|--------------------------|--------------------|----------------|-------------------|----------|--------------------|
| STRAUMANN | Bone Level | 4,8 | RC-4,8 | R/NR | 0035 |
| STRAUMANN | BLX | 3,5/3,75/4/4,5 | RB (Regular Base) | R/NR | 0207 |
| STRAUMANN | BLX | 5/5,5/6,5 | WB (Wide Base) | R/NR | 0208 |
| STRAUMANN | TLX / TLX S | 3,75/4,5 | NT | R/NR | 0260 |
| STRAUMANN | TLX / TLX S | 3,75/4,5 | RT | R/NR | 0261 |
| STRAUMANN | TLX / TLX S | 5,5/6,5 | WT | R/NR | 0262 |
| STRAUMANN | Screw-Retained | NC/RC Ø4,6 | Universal | R | 0101 |
| SYBRON IMPLANT SOLUTIONS | Endopore (Innova) | 4,1 | 4,1 | R/NR | 0024 |
| TBR | Hex-Conic | 5 | Wide | R/NR | 0058 |
| TBR | Connect / Infinity | 3,5 | 3,5 | R/NR | 0266 |
| TBR | Connect / Infinity | 4 | 4 | R/NR | 0267 |
| TBR | Connect / Infinity | 5 | 5 | R/NR | 0268 |
| TITANIUM-FIX | b-fix | 3,5/4 | Regular | R/NR | 0004 |
| TITANIUM-FIX | b-fix | 4,5/5 | Larga | R/NR | 0005 |
| TREE-OSS | Simple | 3,3/3,75/5 | 3,75 Amarillo | R/NR | 0040 |
| TREE-OSS | Rapid/Anatomic | 3,3 | 3,5 Rosa | R/NR | 0023 |
| TREE-OSS | Rapid/Anatomic | 3,75/4 | 4,1 Amarillo | R/NR | 0024 |
| TREE-OSS | Rapid/Anatomic | 5 | 5,1 Azul | R/NR | 0061 |
| TREE-OSS | Anatomic/HS | 3,5 | 3,5 Rosa | R/NR | 0026 |
| TREE-OSS | Anatomic/HS | 4,3 | 4,3 Amarillo | R/NR | 0027 |
| TREE-OSS | Anatomic/HS | 5 | 5 Azul | R/NR | 0028 |
| TREE-OSS | Multi Unit | | Universal | R | 0025 |
| TRI DENTAL IMPLANTS | TRI-Vent | 3,75/4,1/4,7 | 3,5 | ZIO | 0042 |
| TRI DENTAL IMPLANTS | TRI-Vent | 3,75/4,1/4,7 | 3,5 | R | 0040 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|-----------------|------------|------------------|------------|----------|--------------------|
| TRINON | QZ | 3,5/3,75/4,5 | 4 | R/NR | 0024 |
| TRINON | QK | 4 | 4,8 | R/NR | 0074 |
| TRINON | QK | 4 | 4,8 | R/NR | 0037 |
| UFIT | GtZ | 3,5 | Mini | R/NR | 0004 |
| UFIT | GtZ | 4/4,5 | Regular | R/NR | 0005 |
| UFIT | GtZ | 5 | Wide | R/NR | 0005 |
| UFIT | GtZ | 5,5/6/6,5/7 | Ultra-wide | R/NR | 0005 |
| UFIT | NtZ | 3,5 | Mini | R/NR | 0004 |
| UFIT | NtZ | 4/4,5 | Regular | R/NR | 0005 |
| UFIT | NtZ | 5 | Wide | R/NR | 0005 |
| UFIT | NtZ | 5,5/6/6,5/7 | Ultra-wide | R/NR | 0005 |
| VULKAN IMPLANTS | IN-Hex | 3,3/3,75/4,2/5 | 3,75 | R/NR | 0040 |
| WIN | WIN | 3,30/3,75/4,25/5 | 3,75 | R/NR | 0040 |
| WIN | WIN | Universal | Universal | R | 0025 |
| XIVE | Xive | 3 | 3 | R/NR | 0084 |
| XIVE | Xive | 3,4 | 3,4 | R/NR | 0038 |
| XIVE | Xive | 3,8 | 3,8 | R/NR | 0039 |
| XIVE | Xive | 4,5 | 4,5 | R/NR | 0085 |
| XIVE | Xive | 5,5 | 5,5 | R/NR | 0086 |
| YES IMPLANT | S-SYSTEM | 3,3/3,5 | Narrow | R/NR | 0030 |
| YES IMPLANT | S-SYSTEM | 4/4,5 | Regular | R/NR | 0030 |
| YES IMPLANT | S-SYSTEM | 5/5,5 | Wide | R/NR | 0030 |
| ZIACOM | OEX | 3,75/4,25 | RP 4,1 | R/NR | 0024 |
| ZIMMER | Screw-Vent | 3,7/4,1 | 3,5 | R/NR | 0040 |

COMPATIBILITIES AVAILABLE

| BRAND | MODEL | IMPLANT Ø | PLATFORM | ROTATION | COMPATIBILITY CODE |
|--------|------------------|-------------|-----------|----------|--------------------|
| ZIMMER | Screw-Vent | 6 | 5,7 | R/NR | 0080 |
| ZIMMER | TSX Implant | 3,1 | 2,9 | R/NR | 0178 |
| ZIMMER | TSX Implant | 3,7/4,1/4,7 | 3,5 | R/NR | 0040 |
| ZIMMER | TSX Implant | 5,4/6 | 4,5 | R/NR | 0041 |
| ZIMMER | Swiss-Plus | 3,7/4,1/4,8 | 4,8 | R/NR | 0074 |
| ZIMMER | Swiss-Plus | 3,7/4,1/4,8 | 4,8 | R/NR | 0037 |
| ZIMMER | Eztetic | 3,1 | 2,9 | R/NR | 0178 |
| ZIMMER | Screw-Vent | 3,7/4,1 | 3,5 | Z10 | 0042 |
| ZIMMER | Screw-Vent | 4,7 | 4,5 | Z10 | 0043 |
| ZIMMER | TSX Implant | 3,7/4,1/4,7 | 3,5 | Z10 | 0042 |
| ZIMMER | TSX Implant | 5,4/6 | 4,5 | Z10 | 0043 |
| ZIMMER | Tapered Abutment | Universal | Universal | R | 0205 |

COMPATIBLE with 0001

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.001.01-2 | 43° | 25° | 31.322.001.02-2 | 25° | - | 31.322.001.03-2 | 25° | - | 31.322.001.04-2 | 20° | - | - | - | - |
| NR | 31.312.001.01-2 | | | 31.312.001.02-2 | | | 31.312.001.03-2 | | | 31.312.001.04-2 | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.322.001.21-2 | 25° | 20° | 10° |
| NR | 31.312.001.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|-------------------------|-------|---------------|-----------------|
| 52.410.103.01-2 | 10 | 50.312.001.01-2 | 43.621.410.01-2 | 34.612.001.01-2 | 33.390.754.01-2 | 3 | 25° | 23.412.001.01-2 |
| | | 50.312.001.04-2 (IG=3mm) | 43.624.410.01-2 | | 33.490.754.01-2 | 4 | | |
| 52.412.103.01-2 | 12 | | | 33.690.754.01-2 | 6 | | | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) | STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 | ANALOG | LAB SCANBODY |
|-----------------|--------------------|---------------------|-------------------------|-----------------|-----------------------|-----------------|-----------------|
| 41.316.084.01-2 | - | 43.618.201.01-2 | 18 | 40.316.003.01-2 | 43.601.103.02-2 | 22.612.001.01-2 | 30.412.001.01-2 |
| | | 43.624.201.01-2 | 24 | | | | |
| | | 43.632.201.01-2 | 32 | | | | |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.302.001.01-2 | 42.302.001.02-2 | 42.302.001.03-2 | 42.302.001.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.002.01-2 | 45° | 20° | 31.323.002.02-2 | 25° | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.002.01-2 | | | 31.313.002.02-2 | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.002.21-2 | 25° | 20° | 10° |
| NR | 31.313.002.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.408.101.01-2 | 8 | 50.313.002.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.002.01-2 |
| 52.410.101.01-2 | 10 | | | |
| 52.412.101.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.390.805.01-2 | 3 | 30° |
| 33.490.805.01-2 | 4 | |
| 33.690.805.01-2 | 6 | |

SCANALOG

| |
|-----------------|
| 23.413.002.01-2 |
|-----------------|

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.084.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-----------------|-----------------------|
| 40.316.003.01-2 | 43.601.103.02-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.613.002.01-2 | 30.413.002.01-2 |
|-----------------|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.303.002.01-2 | 42.303.002.02-2 | 42.303.002.03-2 | 42.303.002.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.003.01-2 | 45° | 30° | 31.322.003.02-2 | 25° | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.003.01-2 | | | 31.312.003.02-2 | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-------------------------|----------------------|-----------------------|-----------------------|
| R | 31.322.003.23-2 | 30° | 25° | 15° |
| NR | 31.312.003.23-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.104.01-2 | 10 | 50.312.003.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.612.003.01-2 |
| | | | | |
| 52.412.104.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 25° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.065.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| 40.320.003.02-2 | 43.601.103.02-2 |

ANALOG LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.612.003.01-2 | 30.412.001.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.004.01-2 | 45° | 29° | 31.323.004.02-2 | 30° | 20° | 31.323.004.03-2 | 25 | - | 31.323.004.04-2 | 20 | - | - | - | - |
| NR | 31.313.004.01-2 | | | 31.313.004.02-2 | | | 31.313.004.03-2 | | | 31.313.004.04-2 | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.004.21-2 | 25° | 20° | 10° |
| NR | 31.313.004.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-----------------|--------------|-----------------|------------------------------------|--|-----------------------------|-----------------|---------------|-----------------|
| 52.410.103.01-2 | 10 | 50.313.004.01-2 | 43.620.411.01-2 43.621.410.01-2 | 34.613.004.01-2 (1) 34.613.004.02-2 (2) | 33.390.754.01-2 | 3 | 25° | 23.413.004.02-2 |
| | | | | | 50.313.004.03-2 (IG=3mm) | 43.624.410.01-2 | | |
| 52.412.103.01-2 | 12 | | | | 33.690.754.01-2 | 6 | | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) | STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 | ANALOG | LAB SCANBODY |
|-----------------|--------------------|---------------------|-------------------------|-----------------|-----------------------|-----------------|-----------------|
| 41.316.076.01-2 | - | 43.618.201.01-2 | 18 | 40.316.005.02-2 | 43.601.105.01-2 | 22.613.004.01-2 | 30.413.002.01-2 |
| | | 43.624.201.01-2 | 24 | | | | |
| | | 43.632.201.01-2 | 32 | | | | |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.303.004.01-2 | 42.303.004.02-2 | 42.303.004.03-2 | 42.303.004.04-2 |

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.005.01-2 | 38° | 23° | 31.324.005.02-2 | 25° | 15° | 31.324.005.03-2 | 20 | - | 31.324.005.04-2 | 15 | - | - | - | - |
| NR | 31.314.005.01-2 | | | 31.314.005.02-2 | | | 31.314.005.03-2 | | | 31.314.005.04-2 | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-------------------------|----------------------|-----------------------|-----------------------|
| R | 31.324.005.21-2 | 25° | 20° | 10° |
| NR | 31.314.005.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|
| 52.410.102.01-2 | 10 | 50.314.005.01-2 | 43.620.411.01-2 | 34.614.005.01-2 |
| | | 50.314.005.03-2 (IG=3mm) | 43.621.410.01-2 | |
| 52.412.102.01-2 | 12 | | 43.624.410.01-2 | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.958.01-2 | 3 | 30° |
| 33.490.958.01-2 | 4 | |
| 33.690.958.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.090.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-------------------|--------------------------|
| 40.320.005.03-2 | 43.601.105.01-2 |

ANALOG LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.614.005.01-2 | 30.413.002.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0006

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.006.01-2 | 40° | 20° | 31.322.006.02-2 | 25 | - | 31.322.006.03-2 | 20 | - | 31.322.006.04-2 | 15 | - | - | - | - |
| NR | 31.312.006.01-2 | | | 31.312.006.02-2 | | | 31.312.006.03-2 | | | 31.312.006.04-2 | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| R | 31.322.006.21-2 | 30° | 20° | 15° |
| NR | 31.312.006.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------------------|-------------------|
| 52.410.105.01-2 | 10 | 50.312.006.03-2 (IG=3mm) | 43.621.410.01-2 43.624.410.01-2 | 34.612.006.01-2 |
| | | | | |
| 52.412.105.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.330.734.01-2 | 3 | 25° |
| 33.430.734.01-2 | 4 | |
| 33.630.734.01-2 | 6 | |

SCANALOG

| |
|-----------------|
| 23.412.006.01-2 |
|-----------------|

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.072.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|--------------------------|
| 40.316.005.01-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.612.006.01-2 | 30.412.001.01-2 |
|-----------------|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.302.006.01-2 | 42.302.006.02-2 | 42.302.006.03-2 | 42.302.006.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.007.01-2 | 38° | 17° | 31.323.007.02-2 | 25° | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.007.01-2 | | | 31.313.007.02-2 | | - | - | - | - | - | - | - | - | - | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1,5 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.007.21-2 | 25° | 20° | 10° |
| NR | 31.313.007.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-----------------|--------------|--|------------------------------------|-------------------|-------------------------|-------|---------------|-----------------|
| 52.408.101.01-2 | 8 | 50.313.007.01-2 50.313.007.03-2 (IG=3mm) | 43.621.410.01-2 43.624.410.01-2 | 34.613.007.01-2 | 33.350.775.01-2 | 3 | 25° | 23.413.007.01-2 |
| 52.410.101.01-2 | 10 | | | | 33.450.775.01-2 | 4 | | |
| 52.412.101.01-2 | 12 | | | | 33.650.775.01-2 | 6 | | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) | STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 | ANALOG | LAB SCANBODY |
|-----------------|--------------------|---------------------|-------------------------|-----------------|-----------------------|-----------------|-----------------|
| 41.318.074.01-2 | - | 43.618.201.01-2 | 18 | 40.318.005.02-2 | 43.601.105.01-2 | 22.613.007.01-2 | 30.413.002.01-2 |
| | | 43.624.201.01-2 | 24 | | | | |
| | | 43.632.201.01-2 | 32 | | | | |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.303.007.01-2 | 42.303.007.02-2 | 42.303.007.03-2 | 42.303.007.04-2 |

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.008.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | - | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.008.21-2 | 25° | 20° | 10° |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.408.113.01-2 | 8 | 50.313.008.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.008.01-2 |

DYNAMIC MILLING TOOL

SCANALOG

| DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-------------------------|-------|---------------|-----------------|
| 33.370.716.01-2 | 3 | 30° | 23.413.008.01-2 |
| 33.470.716.01-2 | 4 | | |
| 33.670.716.01-2 | 6 | | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.318.045.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-------------------|--------------------------|
| 40.318.005.01-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.009.01-2 | 45° | 25° | 31.322.009.02-2 | 25° | 25° | 31.322.009.03-2 | 25° | - | - | - | - | - | - | - |
| NR | 31.312.009.01-2 | | | 31.312.009.02-2 | | | 31.312.009.03-2 | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.114.01-2 | 10 | 50.312.009.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.612.009.01-2 |
| | | | | |
| 52.412.114.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 25° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.051.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| 40.320.003.01-2 | 43.601.103.02-2 |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0010

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.010.01-2 | 45° | 29° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.010.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|
| 52.410.115.01-2 | 10 | 50.313.010.01-2 | 43.621.410.01-2 | 34.613.010.01-2 |
| | | 50.313.010.04-2 (IG=3mm) | 43.624.410.01-2 | |
| 52.412.115.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 30° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.318.065.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| 40.318.003.01-2 | 43.601.103.02-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.613.010.01-2 | 30.413.002.01-2 |
|-----------------|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|----------------------------|----------------------------|----------------------------|----------------------------|
| R | 42.303.010.01-2 | 42.303.010.02-2 | 42.303.010.03-2 | 42.303.010.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.011.01-2 | 25° | 29° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.011.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 2mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | GINGIVAL HEIGHT 3mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|------------------------|----------------------|-----------------------|-----------------------|------------------------|----------------------|-----------------------|-----------------------|
| R | | 25° | 20° | 15° | - | 25° | 20° | 10° |
| NR | 31.312.011.23-2 | | | | 31.312.011.24-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-----------------|--------------|-----------------|------------------------------------|-------------------|-------------------------|-------|---------------|
| 52.410.108.01-2 | 10 | 50.312.011.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.612.011.01-2 | 33.345.804.01-2 | 3 | 20° |
| | | | | | 33.445.804.01-2 | 4 | |
| 52.412.108.01-2 | 12 | | | | 33.645.804.01-2 | 6 | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.094.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|--------------------------|
| 40.316.005.04-2 | 43.601.105.01-2 |

| ANALOG | LAB SCANBODY |
|--------|-----------------|
| - | 30.412.001.01-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.012.01-2 | 25° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.012.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | GINGIVAL HEIGHT 2 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | GINGIVAL HEIGHT 3mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|-------------------------|----------------------|-----------------------|-----------------------|------------------------|----------------------|-----------------------|-----------------------|
| R | - | 25° | 25° | 15° | - | 25° | 20° | 15° | - | 25° | 20° | 10° |
| NR | 31.313.012.21-2 | | | | 31.313.012.23-2 | | | | 31.313.012.24-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.109.01-2 | 10 | 50.313.012.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.012.01-2 |
| 52.412.109.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.345.804.01-2 | 3 | 20° |
| 33.445.804.01-2 | 4 | |
| 33.645.804.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.094.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-------------------|--------------------------|
| 40.316.005.04-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,7 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.013.01-2 | 43° | 23° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.013.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.320.074.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-----------------|---------------------|
| 40.320.007.02-2 | 43.601.107.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0014

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.014.01-2 | 41° | 23° | 31.322.014.02-2 | 25° | 17° | - | 20° | 25° | - | - | - | - | - | - |
| NR | 31.312.014.01-2 | | | 31.312.014.02-2 | | | 31.312.014.03-2 | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|
| 52.410.128.01-2 | 10 | 50.312.014.03-2 (IG=3mm) | 43.621.415.01-2 | 34.612.014.01-2 |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

SCANALOG

| DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-------------------------|-------|---------------|-----------------|
| 33.345.804.01-2 | 3 | 25° | 23.412.014.01-2 |
| 33.445.804.01-2 | 4 | | |
| 33.645.804.01-2 | 6 | | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.067.01-2 | 41.314.105.01-2 | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| 40.314.003.04-2 | 43.601.103.02-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|----------------------------|----------------------------|----------------------------|----------------------------|
| R | - | 42.302.014.02-2 | 42.302.014.03-2 | 42.302.014.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,7 mm | α_s | α_c | GINGIVAL HEIGHT 2,5 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT 5 mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|
| R | 31.323.015.01-2 | 43° | 23° | 31.323.015.02-2 | 25° | 15° | 31.323.015.03-2 | 25° | - | 31.323.015.04-2 | 20° | - | 31.323.015.05-2 | 15° | - |
| NR | 31.313.015.01-2 | | | 31.313.015.02-2 | | | 31.313.015.03-2 | | | 31.313.015.04-2 | | | 31.313.015.05-2 | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1,7 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | GINGIVAL HEIGHT 2,5 mm | GINGIVAL HEIGHT 3,5 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|---------------------------|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.015.21-2 | 30° | 25° | 10° | 31.323.015.22-2 | 31.313.015.26-2 | 25° | 20° | 10° |
| NR | 31.313.015.21-2 | | | | 31.313.015.22-2 | | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-----------------|-----------|-----------------------------|---------------------|-----------------|----------------------|-------|---------------|-----------------|
| 52.410.104.01-2 | 10 | 50.313.015.01-2 | 43.621.410.01-2 | 34.613.015.01-2 | 33.390.805.01-2 | 3 | 25° | 23.413.015.01-2 |
| | | 50.313.015.03-2 (IG=3mm) | 43.624.410.01-2 | | 33.490.805.01-2 | 4 | | |
| 52.412.104.01-2 | 12 | | | | 33.690.805.01-2 | 6 | | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.318.075.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-----------------|-----------------------|
| 40.318.003.02-2 | 43.601.103.02-2 |

| ANALOG | LAB SCANBODY |
|--------|-----------------|
| - | 30.413.002.01-2 |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.303.015.01-2 | 42.303.015.02-2 | 42.303.015.03-2 | 42.303.015.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0016

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|----|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| | 0,8 mm | | | 1,5 mm | | | mm | | | mm | | | mm | | |
| R | 31.322.016.01-2 | 45° | 28° | 31.322.016.02-2 | 25° | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.016.01-2 | | | 31.312.016.02-2 | | - | - | - | - | - | - | - | - | - | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|
| | 1,5 mm | CH=5mm | CH= 7mm | CH= 9mm |
| R | - | 25° | 25° | 15° |
| NR | 31.312.016.22-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|-----------|--------------------------|---------------------|-----------------|
| 52.408.106.01-2 | 8 | 50.312.016.01-2 | 43.621.410.01-2 | 34.610.016.01-2 |
| 52.410.106.01-2 | 10 | 50.312.016.04-2 (IG=3mm) | 43.624.410.01-2 | |
| 52.412.106.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.360.754.01-2 | 3 | 25° |
| 33.460.754.01-2 | 4 | |
| 33.660.754.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.071.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|-----------------------|
| 40.316.005.05-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT | GINGIVAL HEIGHT | GINGIVAL HEIGHT | GINGIVAL HEIGHT |
|---|-----------------|-----------------|-----------------|-----------------|
| | 1 mm | 2 mm | 3 mm | 4 mm |
| R | - | 42.302.016.02-2 | - | - |

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,7 mm | α_s | α_c | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.017.01-2 | 45° | 24° | 31.323.017.02-2 | 25° | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.017.01-2 | | | 31.313.017.02-2 | | | - | | | - | | | | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,7 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.017.21-2 | 30° | 25° | 15° |
| NR | 31.313.017.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|
| 52.408.101.01-2 | 8 | 50.313.017.01-2 | 43.621.410.01-2 | 34.613.017.01-2 |
| 52.410.101.01-2 | 10 | 50.313.017.04-2 (IG=3mm) | 43.624.410.01-2 | |
| 52.412.101.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.360.756.01-2 | 3 | 30° |
| 33.460.756.01-2 | 4 | |
| 33.660.756.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.317.073.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|--------------------------|
| 40.317.005.01-2 | 43.601.105.01-2 |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | - | 42.303.017.02-2 | - | - |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.018.01-2 | 39° | 18° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.018.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.102.01-2 | 10 | 50.314.018.01-2 | 43.621.410.01-2 | 34.614.018.01-2 |
| | | | 43.624.410.01-2 | |
| 52.412.102.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.360.756.01-2 | 3 | 30° |
| 33.460.756.01-2 | 4 | |
| 33.660.756.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.317.073.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|--------------------------|
| 40.317.005.01-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,8 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.019.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.019.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.105.01-2 | 10 | 50.312.019.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.612.019.01-2 |
| | | | | |
| 52.412.105.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.360.754.01-2 | 3 | 25° |
| 33.460.754.01-2 | 4 | |
| 33.660.754.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.071.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-------------------|--------------------------|
| 40.316.005.05-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.020.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | - | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| R | - | | | |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.408.112.01-2 | 8 | 50.313.020.01-2 | 43.620.411.01-2 | 34.613.020.01-2 |
| - | 10 | | | |
| - | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 30° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.044.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-------------------|--------------------------|
| 40.316.005.06-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.005.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0021

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT 5 mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|
| R | 31.322.021.01-2 | 43° | 24° | 31.322.021.02-2 | 25° | 20° | 31.322.021.03-2 | 20° | 25° | 31.322.021.04-2 | 15° | 25° | 31.322.021.05-2 | 15° | 20° |
| NR | 31.312.021.01-2 | | | 31.312.021.02-2 | | | 31.312.021.03-2 | | | 31.312.021.04-2 | | | 31.312.021.05-2 | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1,5 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | GINGIVAL HEIGHT 3 mm | α_s CH=5mm | α_s H= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|-------------------------|----------------------|----------------------|-----------------------|
| R | 31.322.021.21-2 | 25° | 20° | 10° | 31.322.021.23-2 | 25° | 20° | 15° |
| NR | 31.312.021.21-2 | | | | 31.312.021.23-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-----------------|--------------|-----------------------------|------------------------------------|-------------------|-------------------------|-------|---------------|-----------------|
| 52.410.103.01-2 | 10 | 50.312.021.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.612.021.01-2 | 33.335.754.01-2 | 3 | 25° | 23.412.021.01-2 |
| | | | | | 33.435.754.01-2 | 4 | | |
| 52.412.103.01-2 | 12 | 50.312.021.03-2 (IG=3mm) | | | 33.635.754.01-2 | 6 | | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) | STRAIGHT SCREW | SCREWDRIVER UNIGRIP | ANALOG | LAB SCANBODY |
|-----------------|--------------------|---------------------|-------------------------|-----------------|---------------------|-----------------|-----------------|
| 41.316.073.01-2 | 41.316.108.01-2 | 43.618.201.01-2 | 18 | 40.316.008.02-2 | 43.601.108.01-2 | 22.612.021.01-2 | 30.412.001.01-2 |
| | | 43.624.201.01-2 | 24 | | | | |
| | | 43.632.201.01-2 | 32 | | | | |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.302.021.01-2 | 42.302.021.02-2 | 42.302.021.03-2 | 42.302.021.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,3 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT 5 mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|
| R | 31.323.022.01-2 | 40° | 19° | 31.323.022.02-2 | 25° | 14° | 31.323.022.03-2 | 20° | 30° | 31.323.022.04-2 | 15 | 30 | 31.323.022.05-2 | 15° | 20° |
| NR | 31.313.022.01-2 | | | 31.313.022.02-2 | | | 31.313.022.03-2 | | | 31.313.022.04-2 | | | 31.313.022.05-2 | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1,3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | GINGIVAL HEIGHT 3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|-------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.022.21-2 | 30° | 25° | 10° | 31.323.022.23-2 | 20° | 20° | 10° |
| NR | 31.313.022.21-2 | | | | 31.313.022.23-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|-----------------------------|-----------------|---------------|-----------------|
| 52.408.101.01-2 | 8 | 50.313.022.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.022.01-2 | 33.335.758.01-2 | 3 | 30° | 23.413.022.01-2 |
| 52.410.101.01-2 | 10 | | | | 33.435.758.01-2 | 4 | | |
| 52.412.101.01-2 | 12 | | | | 50.313.022.03-2 (IG=3mm) | 33.635.758.01-2 | | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) | STRAIGHT SCREW | SCREWDRIVER UNIGRIP | ANALOG | LAB SCANBODY |
|-----------------|--------------------|---------------------|-------------------------|-----------------|---------------------|-----------------|-----------------|
| 41.320.075.01-2 | 41.320.117.01-2 | 43.618.201.01-2 | 18 | 40.320.008.02-2 | 43.601.108.01-2 | 22.613.022.01-2 | 30.413.002.01-2 |
| | | 43.624.201.01-2 | 24 | | | | |
| | | 43.632.201.01-2 | 32 | | | | |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.303.022.01-2 | 42.303.022.02-2 | 42.303.022.03-2 | 42.303.022.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.023.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.023.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|-------------------------|-------|---------------|-----------------|
| 52.410.103.01-2 | 10 | 50.312.023.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.612.023.01-2 | 33.390.805.01-2 | 3 | 25° | 23.412.023.01-2 |
| | | | | | 33.490.805.01-2 | 4 | | |
| 52.412.103.01-2 | 12 | | | | 33.690.805.01-2 | 6 | | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) | STRAIGHT SCREW | SCREWDRIVER UNIGRIP | ANALOG | LAB SCANBODY |
|-----------------|--------------------|---------------------|-------------------------|-----------------|---------------------|-----------------|-----------------|
| 41.316.059.01-2 | - | 43.618.201.01-2 | 18 | 40.316.008.01-2 | 43.601.108.01-2 | 22.612.023.01-2 | 30.412.001.01-2 |
| | | 43.624.201.01-2 | 24 | | | | |
| | | 43.632.201.01-2 | 32 | | | | |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.024.01-2 | 45° | 30° | 31.323.024.02-2 | 30° | 30° | - | - | - | - | - | - | - | - | - |
| NR | 31.313.024.01-2 | | | 31.313.024.02-2 | | | - | - | - | - | - | | | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | GINGIVAL HEIGHT 0,5 mm | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | α_s CH 5mm | α_s CH 7mm | α_s CH 9mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm | α_s CH 5mm | α_s CH 7mm | α_s CH 9mm |
|----|---------------------------|---------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 31.323.024.21-2 | 31.323.024.22-2 | 31.323.024.23-2 | 31.323.024.24-2 | 30° | 25° | 10° | 31.323.024.25-2 | 31.323.024.26-2 | 25° | 20° | 15° |
| NR | | | 31.313.024.23-2 | 31.313.024.24-2 | | | | 31.313.024.25-2 | 31.313.024.26-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|-------------------------|-------|---------------|-----------------|
| 52.408.101.01-2 | 8 | 50.313.024.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.024.01-2 | 33.390.716.01-2 | 3 | 30° | 23.413.024.01-2 |
| 52.410.101.01-2 | 10 | | | | 33.490.716.01-2 | 4 | | |
| 52.412.101.01-2 | 12 | | | | 33.690.716.01-2 | 6 | | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.320.060.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER UNIGRIP |
|-----------------|---------------------|
| 40.320.008.01-2 | 43.601.108.01-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.613.024.01-2 | 30.413.002.01-2 |
|-----------------|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | - | 42.303.024.02-2 | 42.303.024.03-2 | - |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.025.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | - | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.025.21-2 | 30° | 25° | 10° |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.408.112.01-2 | 8 | 50.313.025.02-2 | 43.620.411.01-2 | 34.613.025.01-2 |
| 52.410.111.01-2 | 10 | 50.313.025.01-2 | 43.621.410.01-2 43.624.410.01-2 | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 30° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

SCANALOG

| |
|-----------------|
| 23.413.025.01-2 |
|-----------------|

REFERENCE SCANBODY

| SCANBODY | PEEK PINS | mm |
|-----------------|-----------------|----|
| 54.322.025.31-2 | 49.414.000.01-2 | 6 |
| | 49.415.000.01-2 | 9 |
| | 49.416.000.01-2 | 13 |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.039.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER UNIGRIP |
|-------------------|------------------------|
| 40.314.008.01-2 | 43.601.108.01-2 |

ANALOG

| | |
|-----------------|-----------------|
| 22.613.025.01-2 | 30.413.005.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.026.01-2 | 45° | 29° | 31.322.026.02-2 | 25° | 22° | - | - | - | - | - | - | - | - | - |
| NR | 31.312.026.01-2 | | | 31.312.026.02-2 | | | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.322.026.21-2 | 25° | 20° | 10° |
| NR | 31.312.026.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.108.01-2 | 10 | 50.312.026.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.612.026.01-2 |
| | | | | |
| 52.412.108.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.390.805.01-2 | 3 | 25° |
| 33.490.805.01-2 | 4 | |
| 33.690.805.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.318.075.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER UNIGRIP |
|-----------------|---------------------|
| 40.318.008.01-2 | 43.601.108.01-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.612.026.01-2 | 30.412.001.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.027.01-2 | 35° | 29° | 31.323.027.02-2 | 25° | 22° | - | - | - | - | - | - | - | - | - |
| NR | 31.313.027.01-2 | | | 31.313.027.02-2 | | | - | - | - | - | - | | | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.027.21-2 | 25° | 20° | 10° |
| NR | 31.313.027.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.109.01-2 | 10 | 50.313.027.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.027.01-2 |
| | | | | |
| 52.412.109.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.958.01-2 | 3 | 30° |
| 33.490.958.01-2 | 4 | |
| 33.690.958.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.090.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER UNIGRIP |
|-------------------|------------------------|
| 40.320.008.03-2 | 43.601.108.01-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.613.027.01-2 | 30.413.002.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.028.01-2 | 35° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.028.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.109.01-2 | 10 | 50.314.028.01-2 | 43.621.410.01-2 | 34.614.028.01-2 |
| | | | 43.624.410.01-2 | |
| 52.412.109.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.390.958.01-2 | 3 | 30° |
| 33.490.958.01-2 | 4 | |
| 33.690.958.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.320.090.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER UNIGRIP |
|-----------------|---------------------|
| 40.320.008.03-2 | 43.601.108.01-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.614.028.01-2 | 30.413.002.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.029.01-2 | 30° | 23° | 31.322.029.02-2 | 25° | 15° | 31.322.029.03-2 | 20 | 25 | 31.322.029.04-2 | 15° | 25° | - | - | - |
| NR | 31.312.029.01-2 | | | 31.312.029.02-2 | | | 31.312.029.03-2 | | | 31.312.029.04-2 | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 2 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-------------------------|----------------------|-----------------------|-----------------------|
| R | - | 25° | 20° | 15° |
| NR | 31.312.029.22-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|-------------------------|-------|---------------|-----------------|
| 52.410.103.01-2 | 10 | 50.312.029.01-2 | 43.621.410.01-2 | 34.613.029.01-2 | 33.345.804.01-2 | 3 | 20° | 23.412.029.01-2 |
| | | 50.312.029.03-2 | 43.624.410.01-2 | | 33.445.804.01-2 | 4 | | |
| 52.412.103.01-2 | 12 | (IG=3mm) | | 33.645.804.01-2 | 6 | | | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) | STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 | ANALOG | LAB SCANBODY |
|-----------------|--------------------|---------------------|-------------------------|-----------------|-----------------------|--------|-----------------|
| 41.316.094.01-2 | 41.316.132.01-2 | 43.618.201.01-2 | 18 | 40.316.003.02-2 | 43.601.103.02-2 | - | 30.412.001.01-2 |
| | | 43.624.201.01-2 | 24 | | | | |
| | | 43.632.201.01-2 | 32 | | | | |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.302.029.01-2 | 42.302.029.02-2 | 42.302.029.03-2 | 42.302.029.04-2 |

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,1 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.030.01-2 | 42° | 25° | 31.323.030.02-2 | 25° | 15° | 31.323.030.03-2 | 20° | 30° | 31.323.030.04-2 | 15° | 30° | - | - | - |
| NR | 31.313.030.01-2 | | | 31.313.030.02-2 | | | 31.313.030.03-2 | | | 31.313.030.04-2 | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1,1 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | GINGIVAL HEIGHT 3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|-------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.030.21-2 | 25° | 20° | 10° | 31.323.030.23-2 | 25° | 20° | 10° |
| NR | 31.313.030.21-2 | | | | 31.313.030.23-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.408.101.01-2 | 8 | 50.313.030.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.030.01-2 |
| 52.410.101.01-2 | 10 | | | |
| 52.412.101.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.345.808.01-2 | 3 | 30° |
| 33.445.808.01-2 | 4 | |
| 33.645.808.01-2 | 6 | |

SCANALOG

| |
|-----------------|
| 23.413.030.01-2 |
|-----------------|

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.079.01-2 | 41.320.125.01-2 | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| 40.320.003.04-2 | 43.601.103.02-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm | GINGIVAL HEIGHT 5 mm |
|---|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| R | 42.303.030.01-2 | 42.303.030.02-2 | 42.303.030.03-2 | 42.303.030.04-2 | 42.303.030.05-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,3 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3mm | α_s | α_c | GINGIVAL HEIGHT 4mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|------------------------|------------|------------|------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.033.01-2 | 38° | 18° | 31.322.033.02-2 | 20° | 14° | 31.322.033.03-2 | 15° | 25° | 31.322.033.04-2 | 15° | 25° | - | - | - |
| NR | 31.312.033.01-2 | | | 31.312.033.02-2 | | | 31.312.033.03-2 | | | 31.312.033.04-2 | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1,3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | GINGIVAL HEIGHT 3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|-------------------------|----------------------|-----------------------|-----------------------|
| R | 31.322.033.21-2 | 25° | 20° | 10° | 31.322.033.23-2 | 20° | 15° | 10° |
| NR | 31.312.033.21-2 | | | | 31.312.033.23-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | | |
|-----------------|--------------|-----------------|------------------------|-------------------|-----------------------------|-----------------|---------------|-----------------|---|
| 52.408.106.01-2 | 8 | 50.312.033.01-2 | 43.621.410.01-2 | 34.612.033.01-2 | 33.315.804.01-2 | 3 | 25° | | |
| 52.410.106.01-2 | 10 | | | | 50.312.033.03-2 (IG=3mm) | 43.624.410.01-2 | | 33.415.804.01-2 | 4 |
| 52.412.106.01-2 | 12 | | | | 33.615.804.01-2 | 6 | | | |

| |
|-----------------|
| 23.412.033.01-2 |
|-----------------|

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.078.01-2 | 41.316.124.01-2 | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-----------------|---------------------|
| 40.316.007.01-2 | 43.601.107.01-2 |

| ANALOG | LAB SCANBODY |
|-----------------|-----------------|
| 22.612.033.01-2 | 30.412.001.01-2 |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.302.033.01-2 | 42.302.033.02-2 | 42.302.033.03-2 | 42.302.033.04-2 |

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

COMPATIBLE with 0035

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,1 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.035.01-2 | 39° | 18° | 31.323.035.02-2 | 20° | 14° | 31.323.035.03-2 | 15° | 30° | 31.323.035.04-2 | 15° | 30° | - | - | - |
| NR | 31.313.035.01-2 | | | 31.313.035.02-2 | | | 31.313.035.03-2 | | | 31.313.035.04-2 | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1,1 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | GINGIVAL HEIGHT 3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|-------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.035.21-2 | 25° | 20° | 10° | 31.323.035.23-2 | 20° | 15° | 10° |
| NR | 31.313.035.21-2 | | | | 31.313.035.23-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|-------------------------|-------|---------------|-----------------|
| 52.410.107.01-2 | 10 | 50.313.035.01-2 | 43.621.410.01-2 | 34.613.035.01-2 | 33.315.804.01-2 | 3 | 25° | 23.413.035.01-2 |
| | | | 43.624.410.01-2 | | 33.415.804.01-2 | 4 | | |
| 52.412.107.01-2 | 12 | 50.313.035.03-2 (IG=3mm) | | 33.615.804.01-2 | 6 | | | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) | STRAIGHT SCREW | SCREWDRIVER TORX T6 | ANALOG | LAB SCANBODY |
|-----------------|--------------------|---------------------|-------------------------|-----------------|---------------------|-----------------|-----------------|
| 41.316.078.01-2 | 41.316.124.01-2 | 43.618.201.01-2 | 18 | 40.316.007.01-2 | 43.601.107.01-2 | 22.613.035.01-2 | 30.413.002.01-2 |
| | | 43.624.201.01-2 | 24 | | | | |
| | | 43.632.201.01-2 | 32 | | | | |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.303.035.01-2 | 42.303.035.02-2 | 42.303.035.03-2 | 42.303.035.04-2 |

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.037.01-2 | 45° | 25° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.037.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|
| 52.410.110.01-2 | 10 | 50.313.037.04-2 (IG=3mm) | 43.621.410.01-2 | 34.613.037.01-2 |
| | | | 43.624.410.01-2 | |
| 52.412.110.01-2 | 12 | | | |

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.315.708.01-2 | 3 | 30° |
| 33.415.708.01-2 | 4 | |
| 33.615.708.01-2 | 6 | |

| |
|-----------------|
| 23.413.037.01-2 |
|-----------------|

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.320.067.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-----------------|---------------------|
| 40.320.007.01-2 | 43.601.107.01-2 |

| ANALOG | LAB SCANBODY |
|-----------------|-----------------|
| 22.613.037.01-2 | 30.413.004.01-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|----|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| | 0,7 mm | | | mm | | | mm | | | mm | | | mm | | |
| R | 31.322.038.01-2 | 45° | 29° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.038.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|
| | 0,7 mm | CH=5mm | CH= 7mm | CH= 9mm |
| R | 31.322.038.21-2 | 30° | 25° | 10° |
| NR | 31.312.038.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|-----------|-----------------|------------------------------------|-----------------|
| 52.410.103.01-2 | 10 | 50.312.038.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.612.038.01-2 |
| | | | | |
| 52.412.103.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.345.804.01-2 | 3 | 25° |
| 33.445.804.01-2 | 4 | |
| 33.645.804.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.081.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-----------------|-----------------------|
| 40.316.004.02-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,7 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|-----------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.039.01-2 | 45° | 29° | - | - | - | 31.323.039.03-2 | 25° | - | - | - | - | - | - | - |
| NR | 31.313.039.01-2 | | | - | - | 31.313.039.03-2 | - | | | - | - | - | - | - | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,7 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.039.21-2 | 30° | 25° | 10° |
| NR | 31.313.039.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.114.01-2 | 10 | 50.313.039.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.039.01-2 |
| 52.412.114.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.345.856.01-2 | 3 | 25° |
| 33.445.856.01-2 | 4 | |
| 33.645.856.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.081.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-------------------|--------------------------|
| 40.316.004.02-2 | 43.601.104.01-2 |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|----------------------------|----------------------------|----------------------------|----------------------------|
| R | 42.303.039.01-2 | - | - | - |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT 5 mm | α_s | α_c |
|----------------------|---------------------------|------------|------------|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|
| R | 31.322.040.01-2 | 45° | 30° | 31.322.040.02-2 | 25° | 25° | 31.322.040.03-2 | 20° | 30° | 31.322.040.04-2 | 15° | 30° | 31.322.040.05-2 | 10° | 23° |
| NR | 31.312.040.01-2 | | | 31.312.040.02-2 | | | 31.312.040.03-2 | | | 31.312.040.04-2 | | | 31.312.040.05-2 | | |
| NR (Friction-Fit) | 31.312.042.01-2 | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_s | α_s | GINGIVAL HEIGHT 1 mm | α_s | α_s | α_s | GINGIVAL HEIGHT 2 mm | α_s | α_s | α_s | GINGIVAL HEIGHT 3 mm | α_s | α_s | α_s |
|----|---------------------------|------------|------------|------------|-------------------------|------------|------------|------------|-------------------------|------------|------------|------------|-------------------------|------------|------------|------------|
| | | CH= | CH= | CH= | | CH= | CH= | CH= | | CH= | CH= | CH= | | CH= | CH= | CH= |
| | | 5mm | 7mm | 9mm | | 5mm | 7mm | 9mm | | 5mm | 7mm | 9mm | | 5mm | 7mm | 9mm |
| R | 31.322.040.21-2 | 25° | 20° | 10° | 31.322.040.29-2 | 30° | 25° | 20° | | 25° | 20° | 15° | 31.322.040.23-2 | 25° | 20° | 15° |
| NR | 31.312.040.21-2 | | | | 31.312.040.29-2 | | | | 31.312.040.28-2 | | | | 31.312.040.23-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-----------------|--------------|-----------------------------|------------------------------------|-------------------|-------------------------|-------|---------------|-----------------|
| 52.408.101.01-2 | 8 | 50.312.040.03-2 (IG=3mm) | 43.621.410.01-2 43.624.410.01-2 | 34.612.040.01-2 | 33.370.716.01-2 | 3 | 25° | 23.412.040.01-2 |
| 52.410.101.01-2 | 10 | | | | 33.470.716.01-2 | 4 | | |
| 52.412.101.01-2 | 12 | | | | 33.670.716.01-2 | 6 | | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) | STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 | ANALOG | LAB SCANBODY |
|-----------------|--------------------|---------------------|-------------------------|-----------------|-----------------------|-----------------|-----------------|
| 41.317.071.01-2 | 41.317.106.01-2 | 43.618.201.01-2 | 18 | 40.317.004.01-2 | 43.601.104.01-2 | 22.612.040.01-2 | 30.412.001.01-2 |
| | | 43.624.201.01-2 | 24 | | | | |
| | | 43.632.201.01-2 | 32 | | | | |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.302.040.01-2 | 42.302.040.02-2 | 42.302.040.03-2 | 42.302.040.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0040b

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT | α_c | | GINGIVAL HEIGHT | α_s | α_c | | GINGIVAL HEIGHT | α_s | α_c | | GINGIVAL HEIGHT | α_s | α_c | | |
|----|-----------------|------------|-----|-----------------|------------|------------|--|-----------------|------------|------------|--|-----------------|-----------------|------------|-----|-----|
| | 0,6 mm | | | 1,5 mm | | | | 3 mm | | | | mm | | | | |
| | | 45° | 30° | | 25° | 25° | | | 20° | 30° | | | - | - | | |
| R | 31.322.040.01-2 | | | 31.322.040.02-2 | | | | 31.322.040.03-2 | | | | | 31.322.040.05-2 | | 10° | 25° |
| NR | 31.312.040.01-2 | | | 31.312.040.02-2 | | | | 31.312.040.03-2 | | | | | 31.312.040.05-2 | | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|
| | 0,6 mm | CH=5mm | CH= 7mm | CH= 9mm |
| R | 31.322.040.21-2 | | | |
| NR | 31.312.040.21-2 | 25° | 20° | 10° |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|-----------|---------|---------------------|----------------|
| - | - | | | |
| - | - | - | - | - |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.370.716.01-2 | 3 | |
| 33.470.716.01-2 | 4 | 25° |
| 33.670.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.318.071.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 | ANALOG | LAB SCANBODY |
|----------------|-----------------------|--------|-----------------|
| - | - | - | 30.412.001.01-2 |

MULTI-UNIT

| | GINGIVAL HEIGHT | GINGIVAL HEIGHT | GINGIVAL HEIGHT | GINGIVAL HEIGHT |
|---|-----------------|-----------------|-----------------|-----------------|
| | 1 mm | 2 mm | 3 mm | 4 mm |
| R | 42.302.040.01-2 | 42.302.040.02-2 | 42.302.040.03-2 | 42.302.040.04-2 |

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

COMPATIBLE with 0041

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,4 mm | α_s | α_c | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|-------------------|---------------------------|------------|------------|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.041.01-2 | 45° | 30° | 31.323.041.02-2 | 30° | 25° | - | - | - | - | - | - | - | - | - |
| NR | 31.313.041.01-2 | | | 31.313.041.02-2 | | | - | | | - | | | - | | |
| NR (Friction-Fit) | 31.313.043.01-2 | | | - | | | - | | | - | | | | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,4 mm | α_s CH=5mm | α_s CH=7mm | α_s CH=9mm |
|----|---------------------------|----------------------|----------------------|----------------------|
| R | 31.323.041.21-2 | 30° | 20° | 10° |
| NR | 31.313.041.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------------------|-------------------|
| 52.410.102.01-2 | 10 | 50.313.041.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.041.01-2 |
| | | | | |
| 52.412.102.01-2 | 12 | 50.313.041.03-2 (IG=3mm) | | |

DYNAMIC MILLING TOOL

SCANALOG

| DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-------------------------|-------|---------------|-----------------|
| 33.370.716.01-2 | 3 | 30° | 23.413.041.01-2 |
| 33.470.716.01-2 | 4 | | |
| 33.670.716.01-2 | 6 | | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.317.071.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-------------------|--------------------------|
| 40.317.004.01-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.613.041.01-2 | 30.413.002.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0041b

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,4 mm | α_s | α_c | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.041.01-2 | 45° | 30° | 31.323.041.02-2 | 30° | 25° | - | - | - | - | - | - | - | - | - |
| NR | 31.313.041.01-2 | | | 31.313.041.02-2 | | | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,4 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.041.21-2 | 30° | 20° | 10° |
| NR | 31.313.041.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.370.716.01-2 | 3 | 30° |
| 33.470.716.01-2 | 4 | |
| 33.670.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.318.071.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-------------------|--------------------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.044.01-2 | 42° | 23° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.044.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-------------------------|----------------------|-----------------------|-----------------------|
| R | 31.322.044.21-2 | 25° | 20° | 10° |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.105.01-2 | 10 | 50.312.044.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.612.044.01-2 |
| | | | | |
| 52.412.105.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 25° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.318.065.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| 40.318.003.01-2 | 43.601.103.02-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.045.01-2 | 43° | 22° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.045.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.045.21-2 | 30° | 20° | 10° |
| NR | 31.313.045.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.118.01-2 | 10 | 50.313.045.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.045.01-2 |
| | | | | |
| 52.412.118.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 30° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.318.065.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| 40.318.003.01-2 | 43.601.103.02-2 |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0046

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.046.01-2 | 42° | 21° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.046.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-------------------------|----------------------|-----------------------|-----------------------|
| R | 31.324.046.21-2 | 30° | 20° | 10° |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.125.01-2 | 10 | 50.314.046.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.614.046.01-2 |
| | | | | |
| 52.412.125.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 30° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.318.065.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| 40.318.003.01-2 | 43.601.103.02-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.047.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.047.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | - | 30° | 25° | 20° |
| NR | 31.312.047.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.123.01-2 | 10 | 50.312.047.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.612.047.01-2 |
| | | | | |
| 52.412.123.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 25° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.074.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-------------------|------------------------|
| 40.320.007.02-2 | 43.601.107.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.048.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.048.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.048.21-2 | 30° | 25° | 20° |
| NR | 31.313.048.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.123.01-2 | 10 | 50.312.047.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.612.047.01-2 |
| | | | | |
| 52.412.123.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 30° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.074.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-------------------|------------------------|
| 40.320.007.02-2 | 43.601.107.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.321.049.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.311.049.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.116.01-2 | 10 | 50.311.049.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.611.049.01-2 |
| | | | | |
| 52.412.116.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.325.472.01-2* | 3 | 25° |
| 33.425.472.01-2* | 4 | |
| 33.625.472.01-2* | 6 | |

* Only for titanium and soft materials

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.064.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-------------------|--------------------------|
| 40.314.004.01-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|-----------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.051.01-2 | 45° | 27° | - | - | - | 31.323.051.03-2 | 25° | - | - | - | - | - | - | - |
| NR | 31.313.051.01-2 | | | - | - | 31.313.051.03-2 | - | | - | - | - | - | - | - | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|
| 52.410.117.01-2 | 10 | 50.312.050.01-2 | 43.621.410.01-2 | 34.612.050.01-2 |
| | | 50.312.050.04-2 (IG=3mm) | 43.624.410.01-2 | |
| 52.412.117.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.335.676.01-2 | 3 | 25° |
| 33.435.676.01-2 | 4 | |
| 33.635.676.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.318.064.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-------------------|--------------------------|
| 40.318.004.03-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0051

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|-----------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.051.01-2 | 45° | 25° | - | - | - | 31.323.051.03-2 | 25° | - | - | - | - | - | - | - |
| NR | 31.313.051.01-2 | | | - | - | 31.313.051.03-2 | - | | - | - | - | - | - | - | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|
| 52.410.118.01-2 | 10 | 50.313.051.01-2 | 43.621.410.01-2 | 34.613.051.01-2 |
| | | 50.313.051.04-2 (IG=3mm) | 43.624.410.01-2 | |
| 52.412.118.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.335.676.01-2 | 3 | 25° |
| 33.435.676.01-2 | 4 | |
| 33.635.676.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.318.064.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-------------------|--------------------------|
| 40.318.004.03-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.052.01-2 | 45° | 27° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.052.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.102.01-2 | 10 | 50.314.052.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.614.052.01-2 |
| | | | | |
| 52.412.102.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.335.676.01-2 | 3 | 30° |
| 33.435.676.01-2 | 4 | |
| 33.635.676.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.318.064.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-----------------|--------------------------|
| 40.318.004.03-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.054.01-2 | 45° | 25° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.054.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.119.01-2 | 10 | 50.314.054.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.614.054.01-2 |
| | | | | |
| 52.412.119.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.345.856.01-2 | 3 | 30° |
| 33.445.856.01-2 | 4 | |
| 33.645.856.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.318.067.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|-------------------|-------------|
| 40.318.012.01-2 | - |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.057.01-2 | 45° | 27° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.057.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.408.101.01-2 | 8 | 50.314.057.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.614.057.01-2 |
| 52.410.101.01-2 | 10 | | | |
| 52.412.101.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.390.805.01-2 | 3 | 30° |
| 33.490.805.01-2 | 4 | |
| 33.690.805.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.084.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-----------------|--------------------------|
| 40.316.003.01-2 | 43.601.103.02-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.614.057.01-2 | 30.414.003.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.058.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.058.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.118.01-2 | 10 | 50.314.058.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.614.058.01-2 |
| | | | | |
| 52.412.118.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 30° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.320.047.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-----------------|--------------------------|
| 40.320.003.01-2 | 43.601.103.02-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.614.058.01-2 | 30.414.003.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,7 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.059.01-2 | 45° | 27° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.059.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|
| 52.410.115.01-2 | 10 | 50.313.010.01-2 | 43.621.410.01-2 | 34.614.059.01-2 |
| | | 50.313.010.04-2 (IG=3mm) | 43.624.410.01-2 | |
| 52.412.115.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 25 |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.318.065.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| 40.318.003.01-2 | 43.601.103.02-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.414.003.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.060.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.060.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.122.01-2 | 10 | 50.314.060.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.614.060.01-2 |
| | | | | |
| 52.412.122.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 30° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.320.060.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-----------------|--------------------------|
| 40.320.003.02-2 | 43.601.103.02-2 |

ANALOG LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.614.060.01-2 | 30.415.007.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0061

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.061.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.061.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.125.01-2 | 10 | 50.314.061.01-2 | 43.621.410.01-2 | 34.614.061.01-2 |
| | | | 43.624.410.01-2 | |
| 52.412.125.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.958.01-2 | 3 | 30° |
| 33.490.958.01-2 | 4 | |
| 33.690.958.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.325.067.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER UNIGRIP |
|-------------------|------------------------|
| 40.325.008.01-2 | 43.601.108.01-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.614.061.01-2 | 30.415.007.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.066.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | - | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | - |
| - | - | - |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.314.039.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.074.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.074.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.110.01-2 | 10 | 50.313.074.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.074.01-2 |
| 52.412.110.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

SCANALOG

| DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|----------------------|-------|---------------|-----------------|
| 33.330.708.01-2 | 3 | 30° | 23.413.074.01-2 |
| 33.430.708.01-2 | 4 | | |
| 33.630.708.01-2 | 6 | | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.320.050.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Sq. 1.30 |
|-----------------|-------------------------|
| 40.320.007.04-2 | 43.601.102.01-2 |

ANALOG LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.613.074.01-2 | 30.415.007.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0075

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.075.01-2 | 42° | 24° | 31.322.075.02-2 | 25° | 15° | 31.322.075.03-2 | 20° | - | 31.322.075.04-2 | 15° | - | - | - | - |
| NR | - | | | 31.312.075.02-2 | | | 31.312.075.03-2 | | | 31.312.075.04-2 | | | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-------------------------|----------------------|-----------------------|-----------------------|
| R | 31.322.075.21-2 | | | |
| NR | - | 30° | 20° | 15° |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|
| 52.410.105.01-2 | 10 | 50.312.075.03-2 (IG=3mm) | 43.621.410.01-2 | 34.612.075.01-2 |
| | | | 43.624.410.01-2 | |
| 52.412.105.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.330.734.01-2 | 3 | 25° |
| 33.430.734.01-2 | 4 | |
| 33.630.734.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.318.077.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.00 |
|-------------------|--------------------------|
| 40.318.013.01-2 | - |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.612.075.01-2 | 30.412.001.01-2 |
|-----------------|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | - | 42.302.075.02-2 | 42.302.075.03-2 | 42.302.075.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.080.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.080.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.124.01-2 | 10 | 50.314.080.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.614.080.01-2 |
| | | | | |
| 52.412.124.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.370.716.01-2 | 3 | 30° |
| 33.470.716.01-2 | 4 | |
| 33.670.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.317.071.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-------------------|--------------------------|
| 40.317.004.01-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.414.003.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0081

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.325.081.01-2 | 41° | 18° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.315.081.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.126.01-2 | 10 | 50.315.081.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.615.081.01-2 |
| | | | | |
| 52.412.126.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.335.676.01-2 | 3 | 30° |
| 33.435.676.01-2 | 4 | |
| 33.635.676.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.318.064.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-----------------|--------------------------|
| 40.318.004.03-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.414.003.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.082.01-2 | 45° | 25° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.082.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.105.01-2 | 10 | 50.312.082.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.612.082.01-2 |
| | | | | |
| 52.412.105.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.345.804.01-2 | 3 | 25° |
| 33.445.804.01-2 | 4 | |
| 33.645.804.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.074.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|-----------------|-------------|
| 40.316.012.01-2 | - |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.083.01-2 | 45° | 25° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.083.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.103.01-2 | 10 | 50.313.083.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.083.01-2 |
| | | | | |
| 52.412.103.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.345.856.01-2 | 3 | 30° |
| 33.445.856.01-2 | 4 | |
| 33.645.856.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.318.076.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|-----------------|-------------|
| 40.318.012.02-2 | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.321.084.01-2 | 40° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.311.084.01-2 | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.314.076.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Star 1.50 |
|-----------------|--------------------------|
| 40.314.003.03-2 | 43.601.103.02-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.085.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.085.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | - | 30° | 25° | 20° |
| NR | 31.314.085.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.117.01-2 | 10 | 50.314.085.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.614.085.01-2 |
| | | | | |
| 52.412.117.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.345.856.01-2 | 3 | 25° |
| 33.445.856.01-2 | 4 | |
| 33.645.856.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.081.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-------------------|--------------------------|
| 40.316.004.02-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0086

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.325.086.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.315.086.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.117.01-2 | 10 | 50.314.085.01-2 | 43.621.410.01-2 | - |
| | | | 43.624.410.01-2 | |
| 52.412.117.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.345.856.01-2 | 3 | 25° |
| 33.445.856.01-2 | 4 | |
| 33.645.856.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.081.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-------------------|--------------------------|
| 40.316.004.02-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.415.007.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|----|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| | 0,3 mm | | | mm | | | mm | | | mm | | | mm | | |
| R | 31.321.087.01-2 | 25° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.311.087.01-2 | | - | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|-----------------|------------|------------|------------|
| | 0,3 mm | CH=5mm | CH= 7mm | CH= 9mm | 2 mm | CH=5mm | CH= 7mm | CH= 9mm |
| R | - | 20° | 20° | 15° | - | 25° | 20° | 15° |
| NR | 31.311.087.21-2 | | | | 31.311.087.23-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-----------------|-----------|-----------------------------|---------------------|----------------|----------------------|-------|---------------|
| 52.410.132.01-2 | 10 | 50.311.087.04-2 (IG=3mm) | 43.621.415.01-2 | - | - | - | - |
| | | | | | - | - | |
| 52.412.132.01-2 | 12 | | | | - | - | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.094.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|-----------------------|
| 40.316.005.04-2 | 43.601.105.01-2 |

| ANALOG | LAB SCANBODY |
|--------|-----------------|
| - | 30.410.006.01-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.088.01-2 | 25° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.088.01-2 | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.094.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-------------------|--------------------------|
| 40.320.005.04-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.414.003.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|----|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| | 1 mm | | | 2 mm | | | 3 mm | | | mm | | | mm | | |
| R | 31.321.090.01-2 | 45° | 24° | 31.321.090.02-2 | 25° | - | 31.321.090.03-2 | 20° | - | - | - | - | - | - | - |
| NR | 31.311.090.01-2 | | | 31.311.090.02-2 | | | 31.311.090.03-2 | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|
| | 1 mm | CH=5mm | CH= 7mm | CH= 9mm |
| R | - | 30° | 25° | 15° |
| NR | 31.311.090.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|-----------|-----------------------------|---------------------|-----------------|
| 52.410.128.01-2 | 10 | 50.311.090.03-2 (IG=3mm) | 43.621.415.01-2 | 34.611.090.01-2 |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.325.472.01-2* | 3 | 25° |
| 33.425.472.01-2* | 4 | |
| 33.625.472.01-2* | 6 | |

*Only for R

*Only for titanium and soft materials

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.314.074.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|-----------------------|
| 40.314.005.01-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0091

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.091.01-2 | 38° | 18° | 31.324.091.02-2 | 25° | - | 31.324.091.03-2 | 20° | - | 31.324.091.04-2 | 15° | - | - | - | - |
| NR | 31.314.091.01-2 | | | 31.314.091.02-2 | | | 31.314.091.03-2 | | | 31.314.091.04-2 | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | - | 30° | 25° | 15° |
| NR | 31.314.091.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------------------|-------------------|
| 52.410.102.01-2 | 10 | 50.314.091.03-2 (IG=3mm) | 43.621.410.01-2 43.624.410.01-2 | 34.614.091.01-2 |
| | | | | |
| 52.412.102.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.958.01-2 | 3 | 30° |
| 33.490.958.01-2 | 4 | |
| 33.690.958.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.082.01-2 | 41.320.129.01-2 | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-------------------|--------------------------|
| 40.320.005.01-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|----------------------------|----------------------------|----------------------------|----------------------------|
| R | 42.303.091.01-2 | 42.303.091.02-2 | 42.303.091.03-2 | 42.303.091.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.325.092.01-2 | 45° | 25° | 31.325.092.02-2 | 25° | - | 31.325.092.03-2 | 20° | - | - | - | - | - | - | - |
| NR | 31.315.092.01-2 | | | 31.315.092.02-2 | | | 31.315.092.03-2 | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-------------------------|----------------------|-----------------------|-----------------------|
| R | - | 30° | 25° | 15° |
| NR | 31.315.092.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|--|------------------------------------|-------------------|
| 52.410.129.01-2 | 10 | 50.315.092.01-2 50.315.092.03-2 (IG=3mm) | 43.621.410.01-2 43.624.410.01-2 | 34.615.092.01-2 |
| 52.412.129.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.390.958.01-2 | 3 | 30° |
| 33.490.958.01-2 | 4 | |
| 33.690.958.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.320.082.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|--------------------------|
| 40.320.005.01-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.415.007.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.096.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.096.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.110.01-2 | 10 | 50.314.096.01-2 | 43.621.410.01-2 | 34.614.096.01-2 |
| | | | 43.624.410.01-2 | |
| 52.412.110.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.315.708.01-2 | 3 | 30° |
| 33.415.708.01-2 | 4 | |
| 33.615.708.01-2 | 6 | |

SCANALOG

| |
|-----------------|
| 23.414.096.01-2 |
|-----------------|

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.320.067.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-----------------|---------------------|
| 40.320.007.01-2 | 43.601.107.01-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.614.096.01-2 | 30.414.008.01-2 |
|-----------------|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.101.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | - | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.409.133.01-2 | 9 | 50.313.101.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.101.01-2 |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.335.676.01-2 | 3 | 30° |
| 33.435.676.01-2 | 4 | |
| 33.635.676.01-2 | 6 | |

SCANALOG

| |
|-----------------|
| 23.413.101.01-2 |
|-----------------|

REFERENCE SCANBODY

| SCANBODY | PEEK PINS | mm |
|------------------|-----------------|----|
| 54.322.0101.31-2 | 49.414.000.01-2 | 6 |
| | 49.415.000.01-2 | 9 |
| | 49.416.000.01-2 | 13 |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.043.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-------------------|------------------------|
| 40.314.007.01-2 | 43.601.107.01-2 |

ANALOG

| | |
|---|-----------------|
| - | 30.413.005.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,8 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.102.01-2 | 38° | 18° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.102.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_s | α_s | GINGIVAL HEIGHT 1,8 mm | α_s | α_s | α_s | GINGIVAL HEIGHT 3 mm | α_s | α_s | α_s |
|----|-------------------------|------------|------------|------------|---------------------------|------------|------------|------------|-------------------------|------------|------------|------------|
| | CH=5mm | CH=7mm | CH=9mm | | CH=5mm | CH=7mm | CH=9mm | | CH=5mm | CH=7mm | CH=9mm | |
| R | 31.322.102.29-2 | 30° | 25° | 20° | 31.322.102.21-2 | 25° | 15° | 10° | 31.322.102.23-2 | 20° | 20° | 15° |
| NR | 31.312.102.29-2 | | | | 31.312.102.21-2 | | | | 31.312.102.23-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|-------------------------|-------|---------------|-----------------|
| 52.410.128.01-2 | 10 | 50.312.102.03-2 (IG=3mm) | 43.621.415.01-2 | 34.612.102.01-2 | - | - | - | 23.412.102.01-2 |
| - | - | | | | - | - | | |
| - | - | | | | - | - | | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) | STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 | ANALOG | LAB SCANBODY |
|-----------------|--------------------|---------------------|-------------------------|-----------------|-----------------------|--------|-----------------|
| 41.317.065.01-2 | - | 43.618.201.01-2 | 18 | 40.317.005.02-2 | 43.601.105.01-2 | - | 30.412.001.01-2 |
| | | 43.624.201.01-2 | 24 | | | | |
| | | 43.632.201.01-2 | 32 | | | | |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.302.102.01-2 | 42.302.102.02-2 | 42.302.102.03-2 | 42.302.102.04-2 |

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.109.01-2 | 45° | 29° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.109.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.128.01-2 | 10 | 50.312.109.01-2 | 43.621.415.01-2 | 34.612.109.01-2 |
| | | | | |
| 52.412.128.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.360.754.01-2* | 3 | 25° |
| 33.460.754.01-2* | 4 | |
| 33.660.754.01-2* | 6 | |

*Only for R

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.070.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-------------------|--------------------------|
| 40.314.005.02-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.110.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.110.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|---------------------------|------------------------------------|-------------------|
| 52.410.117.01-2 | 10 | 50.310.110.04-2 IG=3mm | 43.621.410.01-2 43.624.410.01-2 | 34.610.110.01-2 |
| 52.412.117.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.360.756.01-2 | 3 | 20° |
| 33.460.756.01-2 | 4 | |
| 33.660.756.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.318.083.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|----------------|---------------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.111.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.111.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|---------------------------|------------------------------------|-------------------|
| 52.410.117.01-2 | 10 | 50.310.110.04-2 IG=3mm | 43.621.410.01-2 43.624.410.01-2 | 34.610.110.01-2 |
| | | | | |
| 52.412.117.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.360.756.01-2 | 3 | 20° |
| 33.460.756.01-2 | 4 | |
| 33.660.756.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.318.083.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|----------------|---------------------|
| - | - |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.321.119.01-2 | 35° | - | 31.321.119.02-2 | 30° | - | - | - | - | - | - | - | - | - | - |
| NR | 31.311.119.01-2 | | | 31.311.119.02-2 | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| R | - | - | - | - |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|---------------------------|------------------------|-------------------|
| 52.410.132.01-2 | 10 | 50.311.119.03-2 IG=3mm | 43.621.410.01-2 | 34.611.119.01-2 |
| | | | 43.624.410.01-2 | |
| 52.412.132.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.360.756.01-2 | 3 | 25 |
| 33.460.756.01-2 | 4 | |
| 33.660.756.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.080.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1,27 |
|-------------------|--------------------------|
| 40.316.005.07-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|----------------------------|----------------------------|----------------------------|----------------------------|
| R | 42.301.119.01-2 | 42.301.119.02-2 | 42.301.119.03-2 | 42.301.119.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.121.01-2 | 45° | 25° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.121.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 2mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | GINGIVAL HEIGHT 3mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|------------------------|----------------------|-----------------------|-----------------------|------------------------|----------------------|-----------------------|-----------------------|
| R | - | 25° | 20° | 15° | - | 25° | 20° | 10° |
| NR | 31.313.121.22-2 | | | | 31.313.121.23-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-----------------|--------------|---------------------------|------------------------------------|-------------------|-------------------------|-------|---------------|
| 52.410.108.01-2 | 10 | 50.312.120.03-2 IG=3mm | 43.621.410.01-2 43.624.410.01-2 | 34.612.120.01-2 | 33.360.754.01-2 | 3 | 20° |
| | | | | | 33.460.754.01-2 | 4 | |
| 52.412.108.01-2 | 12 | | | | 33.660.754.01-2 | 6 | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.080.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|--------------------------|
| 40.316.005.07-2 | 43.601.105.01-2 |

| ANALOG | LAB SCANBODY |
|--------|-----------------|
| - | 30.413.002.01-2 |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.303.121.01-2 | 42.303.121.02-2 | 42.303.121.03-2 | 42.303.121.04-2 |

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|----|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| | 1 mm | | | mm | | | mm | | | mm | | | mm | | |
| R | 31.323.121.01-2 | 45° | 25° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.121.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|-----------------|------------|------------|------------|
| | 2mm | CH=5mm | CH= 7mm | CH= 9mm | 3mm | CH=5mm | CH= 7mm | CH= 9mm |
| R | - | 25° | 20° | 15° | - | 25° | 20° | 10° |
| NR | 31.313.121.22-2 | | | | 31.313.121.23-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|-----------|---------------------------|------------------------------------|-----------------|
| 52.410.109.01-2 | 10 | 50.313.121.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.121.01-2 |
| | | 50.313.121.03-2 IG=3mm | | |
| 52.412.109.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.360.754.01-2 | 3 | 20° |
| 33.460.754.01-2 | 4 | |
| 33.660.754.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.080.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|-----------------------|
| 40.316.005.07-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT | GINGIVAL HEIGHT | GINGIVAL HEIGHT | GINGIVAL HEIGHT |
|---|-----------------|-----------------|-----------------|-----------------|
| | 1 mm | 2 mm | 3 mm | 4 mm |
| R | 42.303.121.01-2 | 42.303.121.02-2 | 42.303.121.03-2 | 42.303.121.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.124.01-2 | 42° | 19° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.124.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.125.01-2 | 10 | 50.314.124.01-2 | 43.621.410.01-2 | 34.614.124.01-2 |
| | | | 43.624.410.01-2 | |
| 52.412.125.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.335.758.01-2 | 3 | 30° |
| 33.435.758.01-2 | 4 | |
| 33.635.758.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.075.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER UNIGRIP |
|-------------------|------------------------|
| 40.320.008.02-2 | 43.601.108.01-2 |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.414.003.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,1 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.125.01-2 | 42° | 20° | 31.323.125.02-2 | 25° | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.125.01-2 | | | 31.313.125.02-2 | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1,1 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.125.21-2 | 30° | 25° | 15° |
| NR | 31.313.125.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|---------------------------|------------------------|-------------------|
| 52.410.117.01-2 | 10 | 50.313.125.01-2 | 43.621.410.01-2 | 34.613.125.01-2 |
| | | 50.313.125.03-2 IG=3mm | 43.624.410.01-2 | |
| 52.412.117.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.315.804.01-2 | 3 | 25° |
| 33.415.804.01-2 | 4 | |
| 33.615.804.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.078.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-------------------|------------------------|
| 40.316.007.01-2 | 43.601.107.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.303.125.01-2 | 42.303.125.02-2 | 42.303.125.03-2 | 42.303.125.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 2,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.128.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | - | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.320.044.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-----------------|--------------------------|
| 40.320.003.05-2 | 43.601.103.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.325.129.01-2 | 43° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.315.129.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.410.130.01-2 | 10 | 50.315.129.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.615.129.01-2 |
| | | | | |
| 52.412.130.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.390.958.01-2 | 3 | 30° |
| 33.490.958.01-2 | 4 | |
| 33.690.958.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.320.090.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER UNIGRIP |
|-----------------|---------------------|
| 40.320.008.03-2 | 43.601.108.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.415.007.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.130.01-2 | 30° | 29° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.130.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.345.804.01-2 | 3 | 20° |
| 33.445.804.01-2 | 4 | |
| 33.645.804.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.081.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|--------------------------|
| 40.316.005.08-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.131.01-2 | 45° | 29° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.131.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.345.804.01-2 | 3 | 20° |
| 33.445.804.01-2 | 4 | |
| 33.645.804.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.081.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|--------------------------|
| 40.316.005.08-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.132.01-2 | 45° | 28° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.132.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.345.856.01-2 | 3 | 25° |
| 33.445.856.01-2 | 4 | |
| 33.645.856.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.081.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-----------------|--------------------------|
| 40.316.005.08-2 | 43.601.105.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.414.003.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.135.01-2 | 45° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.135.01-2 | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.314.080.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-----------------|---------------------|
| 40.314.007.02-2 | 43.601.107.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0136

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,7 mm | α_s | α_c | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT 5 mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-----------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|
| R | 31.320.136.01-2 | 45° | 30° | 31.320.136.02-2 | 25° | - | - | - | - | 31.320.136.04-2 | 20° | - | 31.320.136.05-2 | 20° | - | 31.320.136.06-2 | 15° | - |
| NR | 31.310.136.01-2 | | | 31.310.136.02-2 | | | - | | | 31.310.136.04-2 | | | 31.310.136.05-2 | | | | | |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.128.01-2 | 10 | 50.310.136.01-2 | 43.621.415.01-2 | 34.610.136.01-2 |
| | | 50.310.136.04-2 | | |
| 52.412.128.01-2 | 12 | IG=3mm | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.360.754.01-2 | 3 | 25° |
| 33.460.754.01-2 | 4 | |
| 33.660.754.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.071.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-------------------|--------------------------|
| 40.316.004.03-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|----------------------------|----------------------------|----------------------------|----------------------------|
| R | 42.300.136.01-2 | 42.300.136.02-2 | 42.300.136.3-2 | 42.300.136.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.137.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.137.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.044.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-------------------|------------------------|
| 40.320.007.04-2 | 43.601.107.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.414.008.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| GINGIVAL HEIGHT | | α_s | α_c | GINGIVAL HEIGHT | | | α_s | α_c | GINGIVAL HEIGHT | | | α_s | α_c | GINGIVAL HEIGHT | | | α_s | α_c |
|-----------------|-----------------|------------|------------|-----------------|---|---|------------|------------|-----------------|---|---|------------|------------|-----------------|---|---|------------|------------|
| 1,5 mm | | | | mm | | | | | mm | | | | | mm | | | | |
| R | 31.320.145.01-2 | 45° | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.145.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | | α_s | α_s | α_s |
|-----------------|---|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - | - |
| - | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|-----------|---------|---------------------|----------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| - | - | - |
| - | - | - |
| - | - | - |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.315.078.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| GINGIVAL HEIGHT | | α_s | α_c | GINGIVAL HEIGHT | | | α_s | α_c | GINGIVAL HEIGHT | | | α_s | α_c | GINGIVAL HEIGHT | | | α_s | α_c |
|-----------------|-----------------|------------|------------|-----------------|---|---|------------|------------|-----------------|---|---|------------|------------|-----------------|---|---|------------|------------|
| 1,5 mm | | | | mm | | | | | mm | | | | | mm | | | | |
| R | 31.323.149.01-2 | 45° | 29° | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| NR | 31.313.149.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | | α_s | α_s | α_s |
|-----------------|---|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - | - |
| - | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|-----------|-----------------|------------------------------------|-----------------|
| 52.410.132.01-2 | 10 | 50.310.161.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.610.161.01-2 |
| | | | | |
| 52.412.132.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.320.704.01-2* | 3 | 25° |
| 33.420.704.01-2* | 4 | |
| 33.620.704.01-2* | 6 | |

*Only for R

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.079.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|-----------------|-------------|
| 40.316.014.01-2 | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.150.01-2 | 45° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | - | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.046.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-------------------|--------------------------|
| 40.314.004.04-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.005.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0151

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|---|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.151.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------------------|-------------------|
| 52.409.123.01-2 | 9 | 50.313.151.01-2 | 43.621.410.01-2 43.624.410.01-2 | 34.613.151.01-2 |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 30° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.039.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|-------------------|-------------|
| - | - |

ANALOG LAB SCANBODY

| | |
|---|---|
| - | - |
|---|---|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.152.01-2 | 45° | - | 31.320.152.02-2 | 25° | - | 31.320.152.03-2 | 20° | - | 31.320.152.04-2 | 20° | - | - | - | - |
| NR | 31.310.152.01-2 | | | 31.310.152.02-2 | | | 31.310.152.03-2 | | | 31.310.152.04-2 | | | - | | |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|-----------|---------------------------|------------------------------------|-----------------|
| 52.410.104.01-2 | 10 | 50.310.152.03-2 IG=3mm | 43.621.410.01-2 43.624.410.01-2 | 34.610.152.01-2 |
| | | | | |
| 52.412.104.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.360.756.01-2 | 3 | 25° |
| 33.460.756.01-2 | 4 | |
| 33.660.756.01-2 | 6 | |

*Only for R

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.318.077.02-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | - | 42.300.152.03-2 | 42.300.152.02-2 | - |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.159.01-2 | 41° | 17° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.159.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.128.01-2 | 10 | 50.310.159.01-2 | 43.621.415.01-2 | 34.610.159.01-2 |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.335.754.01-2* | 3 | 25° |
| 33.435.754.01-2* | 4 | |
| 33.635.754.01-2* | 6 | |

*Only for R

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.067.02-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER UNIGRIP |
|-------------------|------------------------|
| 40.314.008.02-2 | 43.601.108.01-2 |

ANALOG

LAB SCANBODY

| | |
|-----------------|-----------------|
| 22.610.159.01-2 | 30.410.006.01-2 |
|-----------------|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|----------------------------|----------------------------|----------------------------|----------------------------|
| R | 42.300.159.01-2 | 42.300.159.02-2 | 42.300.159.03-2 | 42.300.159.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.160.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.160.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.131.01-2 | 10 | 50.310.160.01-2 | 43.621.415.01-2 | 34.610.160.01-2 |
| | | | | |
| 52.412.131.01-2 | 12 | | | |

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.315.804.01-2 | 3 | 25° |
| 33.415.804.01-2 | 4 | |
| 33.615.804.01-2 | 6 | |

| |
|-----------------|
| 23.410.160.01-2 |
|-----------------|

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.078.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-------------------|------------------------|
| 40.316.007.01-2 | 43.601.107.01-2 |

| ANALOG | LAB SCANBODY |
|-----------------|-----------------|
| 22.610.160.01-2 | 30.410.006.01-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0161

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.161.01-2 | 45° | 25° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.161.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.132.01-2 | 10 | 50.310.161.01-2 | 43.621.415.01-2 | 34.610.161.01-2 |
| | | | | |
| 52.412.132.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.320.704.01-2* | 3 | 25° |
| 33.420.704.01-2* | 4 | |
| 33.620.704.01-2* | 6 | |

*Only for R

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.079.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|-----------------|-------------|
| 40.316.014.01-2 | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.162.01-2 | 45° | 24° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.162.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.132.01-2 | 10 | 50.310.161.01-2 | 43.621.415.01-2 | 34.610.161.01-2 |
| | | | | |
| 52.412.132.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.320.704.01-2* | 3 | 25° |
| 33.420.704.01-2* | 4 | |
| 33.620.704.01-2* | 6 | |

*Only for R

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.079.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|-------------------|-------------|
| 40.316.014.01-2 | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.414.003.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.163.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | - | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.408.112.01-2 | 8 | 50.313.163.01-2 | 43.620.411.01-2 | 34.613.163.01-2 |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 30° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.039.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|-------------------|-------------|
| 40.314.014.01-2 | - |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.005.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.164.01-2 | 45° | 21° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.164.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.128.01-2 | 10 | 50.310.164.01-2 | 43.621.415.01-2 | 34.610.164.01-2 |
| | | | | |
| 52.412.128.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.345.804.01-2* | 3 | 25° |
| 33.445.804.01-2* | 4 | |
| 33.645.804.01-2* | 6 | |

*Only for R

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.312.078.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1,20 |
|-------------------|--------------------------|
| 40.312.003.01-2 | 43.601.103.02-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.165.01-2 | 45° | 25° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.165.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.132.01-2 | 10 | 50.313.165.01-2 | 43.621.415.01-2 | 34.613.165.01-2 |
| | | | | |
| 52.412.132.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.345.804.01-2* | 3 | 30° |
| 33.445.804.01-2* | 4 | |
| 33.645.804.01-2* | 6 | |

*Only for R

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.076.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| 40.314.003.03-2 | 43.601.103.02-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,9 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.166.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.166.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|---------------------------|------------------------|-------------------|
| 52.410.128.01-2 | 10 | 50.310.166.03-2 IG=3mm | 43.621.415.01-2 | 34.610.166.01-2 |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.330.734.01-2 | 3 | 20° |
| 33.430.734.01-2 | 4 | |
| 33.630.734.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.084.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-------------------|--------------------------|
| 40.314.004.02-2 | 43.601.104.01-2 |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,9 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.167.01-2 | 43° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.167.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|------------------------------|------------------------|-------------------|
| 52.410.117.01-2 | 10 | 50.313.167.03-2 (IG= 3mm) | 43.620.411.01-2 | 34.613.167.01-2 |
| | | | 43.621.410.01-2 | |
| 52.412.117.01-2 | 12 | | 43.624.410.01-2 | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.330.734.01-2 | 3 | 20° |
| 33.430.734.01-2 | 4 | |
| 33.630.734.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.084.02-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.25 |
|-------------------|--------------------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.168.01-2 | 45° | 30° | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | - | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.039.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.27 |
|-------------------|--------------------------|
| 40.314.004.03-2 | 43.601.104.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.005.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,6 mm | α_s | α_c | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-----------------------|------------|-----------------|-------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.169.01-2 | 45° | 29° | 31.322.169.02-2 | 25 | - | - | - | - | 31.322.169.04-2 | 20 | - | - | - | - |
| NR | 31.312.169.01-2 | | | 31.312.169.02-2 | | | - | - | 31.312.169.04-2 | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1,5 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | GINGIVAL HEIGHT 3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|-------------------------|----------------------|-----------------------|-----------------------|
| R | 31.322.169.22-2 | 30° | 25° | 15° | 31.322.169.24-2 | 25° | 20° | 15° |
| NR | 31.312.169.22-2 | | | | 31.312.169.24-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-----------------|--------------|-----------------|------------------------|-------------------|-------------------------|-------|---------------|
| 52.410.117.01-2 | 10 | 50.312.169.01-2 | 43.621.410.01-2 | 34.612.169.01-2 | 33.330.734.01-2 | 3 | 25° |
| | | 50.312.169.04-2 | 43.624.410.01-2 | | 33.430.734.01-2 | 4 | |
| 52.412.117.01-2 | 12 | IG=3mm | | | 33.630.734.01-2 | 6 | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.317.070.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

| ANALOG | LAB SCANBODY |
|--------|-----------------|
| - | 30.412.001.01-2 |

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.302.169.01-2 | 42.302.169.02-2 | 42.302.169.03-2 | 42.302.169.04-2 |

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|----|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| | 0,3 mm | | | mm | | | mm | | | mm | | | mm | | |
| R | 31.322.170.01-2 | 38° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.170.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|
| | 0,3 mm | CH=5mm | CH= 7mm | CH= 9mm |
| R | 31.322.170.21-2 | 30° | 20° | 15° |
| NR | 31.312.170.21-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|-----------|---------|---------------------|----------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.390.754.01-2 | 3 | 25° |
| 33.490.754.01-2 | 4 | |
| 33.690.754.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.079.02-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|----------------|-----------------------|
| - | - |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.171.01-2 | 35° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.171.01-2 | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.390.754.01-2 | 3 | 25° |
| 33.490.754.01-2 | 4 | |
| 33.690.754.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.079.02-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|----------------|--------------------------|
| - | - |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | - | 35° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.176.01-2 | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.408.138.01-2 | 8 | 50.310.176.01-2 | 43.621.415.01-2 | 34.610.176.01-2 |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.360.756.01-2 | 3 | 30° |
| 33.460.756.01-2 | 4 | |
| 33.660.756.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.044.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| - | - |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|----|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| | 1,5 mm | | | mm | | | mm | | | mm | | | mm | | |
| R | 31.320.178.01-2 | 45° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.178.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|-----------|---------|---------------------|----------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.080.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 0,4 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.322.181.21-2 | 30° | 25° | 10° |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.408.112.01-2 | 8 | 50.312.181.01-2 | 43.620.411.01-2 | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

SCANALOG

| DYNAMIC MILLING TOOL | SHANK | α_{di} | SCANALOG |
|----------------------|-------|---------------|-----------------|
| 33.360.756.01-2 | 3 | 30° | 23.412.181.01-2 |
| 33.460.756.01-2 | 4 | | |
| 33.660.756.01-2 | 6 | | |

DYNAMIC SCREWS

STRAIGHT SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.318.043.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

| ANALOG | LAB SCANBODY |
|--------|--------------|
| - | - |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|----|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| | 0,5 mm | | | mm | | | mm | | | mm | | | mm | | |
| R | 31.322.183.01-2 | 45° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | - | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|-----------|-----------------|---------------------|-----------------|
| 52.408.136.01-2 | 8 | 50.312.183.01-2 | 43.620.411.01-2 | 34.612.183.01-2 |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.330.734.01-2 | 3 | 30° |
| 33.430.734.01-2 | 4 | |
| 33.630.734.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.048.02-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG LAB SCANBODY

| | |
|---|---|
| - | - |
|---|---|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT 2,5 mm | α_s | α_c | GINGIVAL HEIGHT 3,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.186.01-2 | 40° | 30° | 31.323.186.02-2 | 20° | 18° | 31.323.186.03-2 | 15° | - | - | ° | ° | - | ° | ° |
| NR | 31.313.186.01-2 | | | 31.313.186.02-2 | | | 31.313.186.03-2 | | | - | ° | ° | - | ° | ° |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | GINGIVAL HEIGHT 2,5 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|---------------------------|----------------------|-----------------------|-----------------------|
| R | 31.323.186.21-2 | 30° | 25° | 15° | 31.323.186.22-2 | 30° | 25° | 15° |
| NR | 31.313.186.21-2 | | | | 31.313.186.22-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------------------|------------------------|-------------------|
| 52.408.101.01-2 | 8 | 50.313.186.04-2 (IG=3mm) | 43.621.410.01-2 | 34.613.186.01-2 |
| 52.410.101.01-2 | 10 | | 43.624.410.01-2 | |
| 52.412.101.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.330.734.01-2 | 3 | 25 |
| 33.430.734.01-2 | 4 | |
| 33.630.734.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.084.02-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|-------------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm | GINGIVAL HEIGHT 5 mm |
|---|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| R | 42.303.186.01-2 | 42.303.186.02-2 | 42.303.186.03-2 | 42.303.186.04-2 | 42.303.186.05-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|---------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.009.01-2 | 45° | 25° | 31.322.009.02-2 | 25° | 25° | 31.322.009.03-2 | 25° | - | - | - | - | - | - | - |
| NR | 31.312.009.01-2 | | | 31.312.009.02-2 | | | 31.312.009.03-2 | | - | - | - | - | - | | |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.410.114.01-2 | 10 | 50.312.187.01-2 | 43.621.410.01-2 | 34.612.187.01-2 |
| | | | 43.624.410.01-2 | |
| 52.412.114.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 25° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.059.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|-------------------|-------------|
| - | - |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| GINGIVAL HEIGHT | | α_s | α_c | GINGIVAL HEIGHT | | α_s | α_c | GINGIVAL HEIGHT | | α_s | α_c | GINGIVAL HEIGHT | | α_s | α_c |
|-----------------|-----------------|------------|------------|-----------------|---|------------|------------|-----------------|---|------------|------------|-----------------|---|------------|------------|
| 1,5 mm | | | | mm | | | | 3,5 mm | | | | mm | | | |
| R | 31.320.188.01-2 | 45° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.188.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | | α_s | α_s | α_s |
|-----------------|---|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - | - |
| - | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|-----------|---------|---------------------|----------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.315.078.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

COMPATIBLE with 0190

STANDARD DYNAMIC TIBASE®

| GINGIVAL HEIGHT | | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|-----------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| 1,8 mm | | | | mm | | | mm | | | mm | | | mm | | |
| R | 31.320.190.01-2 | 45° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.190.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | | α_s | α_s | α_s |
|-----------------|---|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - | - |
| - | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|-----------|---------|---------------------|----------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.084.02-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| GINGIVAL HEIGHT | | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|-----------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| 0,8 mm | | | | mm | | | mm | | | mm | | | mm | | |
| R | 31.322.191.01-2 | 45° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.191.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | | α_s | α_s | α_s |
|-----------------|---|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - | - |
| - | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|-----------|---------|---------------------|----------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.084.02-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| GINGIVAL HEIGHT | | α_s | α_c | GINGIVAL HEIGHT | | | α_s | α_c | GINGIVAL HEIGHT | | | α_s | α_c | GINGIVAL HEIGHT | | | α_s | α_c |
|-----------------|-----------------|------------|------------|-----------------|---|---|------------|------------|-----------------|---|---|------------|------------|-----------------|---|---|------------|------------|
| 0,3 mm | | | | mm | | | | | mm | | | | | mm | | | | |
| R | 31.323.192.01-2 | 45° | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| - | - | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | | α_s | α_s | α_s |
|-----------------|---|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - | - |
| - | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|-----------|---------|---------------------|----------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.048.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.005.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|---|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.193.01-2 | 45° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.318.051.02-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.005.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| GINGIVAL HEIGHT | | α_s | α_c | GINGIVAL HEIGHT | | | α_s | α_c | GINGIVAL HEIGHT | | | α_s | α_c | GINGIVAL HEIGHT | | | α_s | α_c |
|-----------------|-----------------|------------|------------|-----------------|---|---|------------|------------|-----------------|---|---|------------|------------|-----------------|---|---|------------|------------|
| 0,5 mm | | | | mm | | | | | mm | | | | | mm | | | | |
| R | 31.323.195.01-2 | 45° | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| - | - | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | | α_s | α_s | α_s |
|-----------------|-----------------|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| R | 31.323.195.21-2 | 30° | 25° | 20° |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|-----------|---------|---------------------|----------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.317.041.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.005.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.196.01-2 | 40° | - | 31.320.196.02-2 | 25° | - | 31.320.196.03-2 | 25° | - | - | ° | ° | - | ° | ° |
| NR | 31.310.196.01-2 | | | 31.310.196.02-2 | | | 31.310.196.03-2 | | | - | ° | ° | - | ° | ° |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.086.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.197.01-2 | 35° | - | 31.322.197.02-2 | 20° | - | 31.322.197.03-2 | 20° | - | - | ° | ° | - | ° | ° |
| NR | 31.312.197.01-2 | | | 31.312.197.02-2 | | | 31.312.197.03-2 | | | - | ° | ° | - | ° | ° |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.086.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.198.01-2 | 40° | - | - | - | - | - | - | - | - | ° | ° | - | ° | ° |
| NR | 31.314.198.01-2 | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.086.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.414.003.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.205.01-2 | 45° | - | - | ° | ° | - | ° | ° | - | ° | ° | - | ° | ° |
| NR | - | | | - | ° | ° | - | ° | ° | - | ° | ° | | | |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|-----------------|------------------------|-------------------|
| 52.408.112.01-2 | 8 | 50.312.205.01-2 | 43.620.411.01-2 | 34.612.205.01-2 |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.390.716.01-2 | 3 | 30° |
| 33.490.716.01-2 | 4 | |
| 33.690.716.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.317.040.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT 4 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.207.01-2 | 35° | - | - | - | - | 31.320.207.03-2 | 20° | - | 31.320.207.04-2 | 15° | - | - | - | - |
| NR | 31.310.207.01-2 | | | - | | | 31.310.207.03-2 | | | 31.310.207.04-2 | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT 1,5 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm | 3 mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|---------------------------|----------------------|-----------------------|-----------------------|-----------------|----------------------|-----------------------|-----------------------|
| R | 31.320.207.21-2 | 25° | 20° | 15° | 31.320.207.23-2 | 20° | 15° | 10° |
| NR | 31.310.207.21-2 | | | | 31.310.207.23-2 | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|---------------------------|------------------------------------|-------------------|
| 52.410.103.01-2 | 10 | 50.310.207.03-2 IG=3mm | 43.621.410.01-2 43.624.410.01-2 | 34.610.207.01-2 |
| | | | | |
| 52.412.103.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.345.856.01-2* | 3 | 30° |
| 33.445.856.01-2* | 4 | |
| 33.645.856.01-2* | 6 | |

*Only for R

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.316.066.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|-------------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|----------------------------|----------------------------|----------------------------|----------------------------|
| R | 42.302.207.01-2 | 42.302.207.02-2 | 42.302.207.03-2 | 42.302.207.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| GINGIVAL HEIGHT | | α_s | α_c | GINGIVAL HEIGHT | | α_s | α_c | GINGIVAL HEIGHT | | α_s | α_c | GINGIVAL HEIGHT | | α_s | α_c |
|-----------------|-----------------|------------|------------|-----------------|---|------------|------------|-----------------|---|------------|------------|-----------------|---|------------|------------|
| 1,5 mm | | | | mm | | | | mm | | | | mm | | | |
| R | 31.324.208.01-2 | 45° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.208.01-2 | | - | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | | α_s | α_s | α_s |
|-----------------|---|------------|------------|------------|
| | | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - | - |
| - | - | - | - | - |

DYNAMIC μSCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|-----------|---------------------------|------------------------------------|-----------------|
| 52.410.103.01-2 | 10 | 50.310.207.03-2 IG=3mm | 43.621.410.01-2 43.624.410.01-2 | 34.614.208.01-2 |
| | | | | |
| 52.412.103.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.345.856.01-2* | 3 | 30° |
| 33.445.856.01-2* | 4 | |
| 33.645.856.01-2* | 6 | |

*Only for R

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.066.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.414.003.01-2 |
|---|-----------------|

MULTI-UNIT

| GINGIVAL HEIGHT | | GINGIVAL HEIGHT | | GINGIVAL HEIGHT | | GINGIVAL HEIGHT | |
|-----------------|-----------------|-----------------|-----------------|-----------------|--|-----------------|--|
| 1 mm | | 2 mm | | 3 mm | | 4 mm | |
| R | 42.302.207.01-2 | 42.302.207.02-2 | 42.302.207.03-2 | 42.302.207.04-2 | | | |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.229.01-2 | 40° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.229.01-2 | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.064.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT 2 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.246.01-2 | 25° | - | 31.322.246.02-2 | 25° | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.246.01-2 | | | 31.312.246.02-2 | | | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | - |
| - | - | - |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.318.080.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| - | - |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.323.247.01-2 | - | - | - | 40° | - | - | - | - | - | - | - | - | - | - |
| NR | | | | | | | | | | | | | | | |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | - | - | - |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | - |
| - | - | - |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.040.01-2 | 40.316.007.01-2 | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.249.01-2 | 40° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.249.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|---------------------------|------------------------|-------------------|
| 52.410.128.01-2 | 10 | 50.310.249.03-2 IG=3mm | 43.621.415.01-2 | 34.610.249.01-2 |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| 33.315.804.01-2 | 3 | 25° |
| 33.415.804.01-2 | 4 | |
| 33.615.804.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.314.080.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| - | - |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1mm | α_s | α_c | GINGIVAL HEIGHT 1,5 mm | α_s | α_c | GINGIVAL HEIGHT 3 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|------------------------|------------|------------|---------------------------|------------|------------|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.322.251.01-2 | 40° | - | 31.322.251.02-2 | 40° | - | 31.322.251.04-2 | 25° | - | - | - | - | - | - | - |
| NR | 31.312.251.01-2 | | | 31.312.251.02-2 | | | 31.312.251.04-2 | | | - | | | - | | |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.064.02-2 | 40.316.007.01-2 | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER |
|----------------|-------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 1 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|-------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| - | - | - | - |
| | | - | - |
| | | - | - |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| - | - |

ANALOG LAB SCANBODY

| | |
|---|---|
| - | - |
|---|---|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|----------------------------|----------------------------|----------------------------|----------------------------|
| R | 42.302.257.01-2 | 42.302.257.02-2 | 42.302.257.03-2 | 42.302.257.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.260.01-2 | 40° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.260.01-2 | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|---------------------------|------------------------------------|-------------------|
| 52.410.103.01-2 | 10 | 50.310.207.03-2 IG=3mm | 43.621.410.01-2 43.624.410.01-2 | 34.614.262.01-2 |
| | | | | |
| 52.412.103.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.345.856.01-2 | 3 | 25° |
| 33.445.856.01-2 | 4 | |
| 33.645.856.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.066.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|----------------|--------------------------|
| - | - |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.302.207.01-2 | 42.302.207.02-2 | 42.302.207.03-2 | 42.302.207.04-2 |

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|----|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| | 0,5 mm | | | mm | | | mm | | | mm | | | mm | | |
| R | 31.323.261.01-2 | 40° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.313.261.01-2 | | | - | | | - | | | - | | | - | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT | α_s | α_s | α_s |
|----|-----------------|------------|------------|------------|
| | mm | CH=5mm | CH= 7mm | CH= 9mm |
| R | - | - | - | - |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|-----------|---------------------------|------------------------------------|-----------------|
| 52.410.103.01-2 | 10 | 50.310.207.03-2 IG=3mm | 43.621.410.01-2 43.624.410.01-2 | 34.614.262.01-2 |
| | | | | |
| 52.412.103.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.345.856.01-2 | 3 | 25° |
| 33.445.856.01-2 | 4 | |
| 33.645.856.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.066.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|----------------|-----------------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.004.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT | GINGIVAL HEIGHT | GINGIVAL HEIGHT | GINGIVAL HEIGHT |
|---|-----------------|-----------------|-----------------|-----------------|
| | 1 mm | 2 mm | 3 mm | 4 mm |
| R | 42.302.207.01-2 | 42.302.207.02-2 | 42.302.207.03-2 | 42.302.207.04-2 |

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.324.262.01-2 | 40° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.314.262.01-2 | | | - | | | - | | | - | | | | | |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | | | |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|-----------------|--------------|---------------------------|------------------------------------|-------------------|
| 52.410.103.01-2 | 10 | 50.310.207.03-2 IG=3mm | 43.621.410.01-2 43.624.410.01-2 | 34.614.262.01-2 |
| | | | | |
| 52.412.103.01-2 | 12 | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.345.856.01-2 | 3 | 25° |
| 33.445.856.01-2 | 4 | |
| 33.645.856.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.316.066.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|----------------|--------------------------|
| - | - |

ANALOG LAB SCANBODY

| | |
|---|-----------------|
| - | 30.414.008.01-2 |
|---|-----------------|

MULTI-UNIT

| | GINGIVAL HEIGHT 1 mm | GINGIVAL HEIGHT 2 mm | GINGIVAL HEIGHT 3 mm | GINGIVAL HEIGHT 4 mm |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| R | 42.302.207.01-2 | 42.302.207.02-2 | 42.302.207.03-2 | 42.302.207.04-2 |

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|----|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| | 0,5 mm | | | mm | | | mm | | | mm | | | mm | | |
| R | 31.322.267.01-2 | 40° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.267.01-2 | | - | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|-----------|---------|---------------------|----------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| 33.390.805.01-2 | 3 | 20° |
| 33.490.805.01-2 | 4 | |
| 33.690.805.01-2 | 6 | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.314.050.31-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-----------------|---------------------|
| 40.320.007.02-2 | 43.601.107.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.266.01-2 | 35° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.266.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.068.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.410.006.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c | GINGIVAL HEIGHT | α_s | α_c |
|----|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|-----------------|------------|------------|
| | 0,5 mm | | | mm | | | mm | | | mm | | | mm | | |
| R | 31.322.267.01-2 | 40° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.312.267.01-2 | | - | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| GINGIVAL HEIGHT | α_s | α_s | α_s |
|-----------------|------------|------------|------------|
| | CH=5mm | CH= 7mm | CH= 9mm |
| - | - | - | - |
| - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|-----------|---------|---------------------|----------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|----------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|-----------------|--------------------|---------------------|-------------------------|
| 41.320.068.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER TORX T6 |
|-----------------|---------------------|
| 40.320.007.02-2 | 43.601.107.01-2 |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.412.001.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

STANDARD DYNAMIC TIBASE®

| | GINGIVAL HEIGHT 0,5 mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c | GINGIVAL HEIGHT mm | α_s | α_c |
|----|---------------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|-----------------------|------------|------------|
| R | 31.320.266.01-2 | 35° | - | - | - | - | - | - | - | - | - | - | - | - | - |
| NR | 31.310.266.01-2 | | | - | - | - | - | - | - | - | - | - | - | - | - |

DYNAMIC 3TIBASE®

| | GINGIVAL HEIGHT mm | α_s CH=5mm | α_s CH= 7mm | α_s CH= 9mm |
|----|-----------------------|----------------------|-----------------------|-----------------------|
| R | - | - | - | - |
| NR | - | - | - | - |

DYNAMIC μ SCANBODY (LAB/CLIN)

DIGITAL ANALOG

| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG |
|----------|--------------|---------|------------------------|-------------------|
| - | - | - | - | - |
| - | - | | | |
| - | - | | | |

DYNAMIC MILLING TOOL

| DYNAMIC MILLING TOOL | SHANK | α_{di} |
|-------------------------|-------|---------------|
| - | - | - |
| - | - | |
| - | - | |

DYNAMIC SCREWS

| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) |
|------------------|-----------------------|------------------------|----------------------------|
| 41.320.068.01-2 | - | 43.618.201.01-2 | 18 |
| | | 43.624.201.01-2 | 24 |
| | | 43.632.201.01-2 | 32 |

STRAIGHT SCREWS

| STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 |
|-------------------|--------------------------|
| - | - |

ANALOG

LAB SCANBODY

| | |
|---|-----------------|
| - | 30.413.002.01-2 |
|---|-----------------|

LIBRARY OPTIONS

GH = Gingival Height

CH = Cement Height

IG = Adaptor 3mm

α_s = Standard maximum angulation

α_c = Captive maximum angulation

α_{di} = Direct to implant maximum angulation

α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging

NR = Non Rotational / Engaging

LIBRARY CODES

LAB SCANBODY

DAS_E_XXXX*

DYNAMIC μ SCANBODY

DAS_I_10_XXXX*

DAS_IG_10_XXXX*

SCANALOG

DAS_SA_XXXX*

REFERENCE SCANBODY

DAS_R_XXXX*

MULTI-UNIT DYNAMIC SCANBODY

DAS_MU_I_XXXX*_PREMIUM

DAS_MU_IG_XXXX*_PREMIUM

DAS MULTI-UNIT SCANALOG

DAS_MU_SA_XXXX*_PREMIUM

DAS MULTI-UNIT SCANBODY

DAS_MU_4.5_XXXX*_PREMIUM



DAS_MU_8_XXXX*_PREMIUM

DAS_MU_DS8_XXXX*_PREMIUM

*XXXX= compatibility code (ex.0256)

DYNAMIC SCREWS TECHNICAL SPECIFICATIONS

| REFERENCE | METRIC | TORQUE | TOTAL LENGTH | THREAD LENGTH | A LENGTH | B LENGTH | C LENGTH | HEAD DIAMETER | SEAT | ANGLE | THREAD ENTRY | CONNECTION |
|-----------------|--------|---------|--------------|---------------|----------|----------|----------|---------------|----------|-------|--------------|---------------------|
| 41.312.078.01-2 | 1,2 | 15 N·cm | 7,8 | 2,65 | 6 | 6,55 | 1,25 | 2,3 | conical | 45° | 45° Chamfer | HEXALOBULAR 1,70 |
| 41.314.039.01-2 | 1,4 | 15 N·cm | 3,9 | 1,8 | 2,1 | - | 1,8 | 2,4 | straight | - | 45° Chamfer | |
| 41.314.040.01-2 | 1,4 | 15 N·cm | 4 | 1,85 | 2 | 2,78 | 1,22 | 2,3 | conical | 30° | 45° Chamfer | |
| 41.314.040.02-2 | 1,4 | 15 N·cm | 4 | 1,7 | 2,25 | 2,7 | 1,3 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.314.043.01-2 | 1,4 | 15 N·cm | 4,3 | 1,8 | 2,03 | 2,9 | 1,4 | 2,3 | conical | 35° | 45° Chamfer | |
| 41.314.044.01-2 | 1,4 | 15 N·cm | 4,4 | 2,15 | 2,73 | 3 | 1,4 | 2,3 | conical | 60° | 45° Chamfer | |
| 41.314.045.01-2 | 1,4 | 15 N·cm | 4,5 | 2,3 | 2,5 | 3,28 | 1,22 | 2,3 | conical | 30° | 45° Chamfer | |
| 41.314.046.01-2 | 1,4 | 15 N·cm | 4,6 | 2,5 | 4,6 | 3,17 | 1,43 | 2,3 | conical | 35° | 45° Chamfer | |
| 41.314.052.01-2 | 1,4 | 15 N·cm | 5,2 | 2,9 | 3,4 | - | 1,8 | 2,3 | straight | - | 45° Chamfer | |
| 41.314.064.01-2 | 1,4 | 15 N·cm | 6,4 | 2,2 | 4,21 | 5,15 | 1,25 | 2,3 | conical | 25° | 45° Chamfer | |
| 41.314.067.01-2 | 1,4 | 15 N·cm | 6,7 | 2,31 | 5 | 5,45 | 1,25 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.314.067.02-2 | 1,4 | 15 N·cm | 6,7 | 2,5 | 4,71 | 5,5 | 1,2 | 2,3 | conical | 35° | 45° Chamfer | |
| 41.314.070.01-2 | 1,4 | 15 N·cm | 7 | 2,3 | 5,39 | 5,65 | 1,61 | 2,3 | conical | 60° | 45° Chamfer | |
| 41.314.074.01-2 | 1,4 | 15 N·cm | 7,4 | 3,55 | 5 | 5,99 | 1,41 | 2,3 | conical | 25° | 45° Chamfer | |
| 41.314.076.01-2 | 1,4 | 15 N·cm | 7,6 | 2,4 | 5,9 | 6,35 | 1,25 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.314.080.01-2 | 1,4 | 15 N·cm | 8 | 2,1 | 4,96 | 6,8 | 1,2 | 2,3 | conical | 15° | 45° Chamfer | |
| 41.314.084.01-2 | 1,4 | 15 N·cm | 8,4 | 2,5 | 5,92 | 6,85 | 1,55 | 2,3 | conical | 35° | 45° Chamfer | |
| 41.314.105.01-2 | 1,4 | 15 N·cm | 10,5 | 2,31 | 5 | 5,45 | 5,05 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.315.078.01-2 | N0-80 | 15 N·cm | 7,8 | 2,45 | 5,77 | 6 | 1,8 | 2,3 | conical | 65° | 45° Chamfer | |
| 41.315.040.01-2 | 1,6 | 20 N·cm | 4 | 2,07 | 2,3 | 2,47 | 1,53 | 2,3 | conical | 65° | 45° Chamfer | |
| 41.316.044.01-2 | 1,6 | 20 N·cm | 4,4 | 2,5 | 2,9 | - | 1,5 | 2,3 | straight | - | Semi-sphere | |
| 41.316.048.01-2 | 1,6 | 20 N·cm | 4,8 | 2,4 | 2,93 | 1,87 | 1,3 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.316.048.02-2 | 1,6 | 20 N·cm | 4,8 | 2,4 | 3 | 3,58 | 1,22 | 2,3 | conical | 31° | 45° Chamfer | |
| 41.316.055.01-2 | 1,6 | 20 N·cm | 5,5 | 2,4 | 2,85 | 4,2 | 1,3 | 2,3 | conical | 23° | 45° Chamfer | |
| 41.316.059.01-2 | 1,6 | 20 N·cm | 5,9 | 3 | 4,4 | - | 1,5 | 2,3 | straight | - | Semi-sphere | |
| 41.316.064.01-2 | 1,6 | 20 N·cm | 6,4 | 3,15 | 4,7 | 5 | 1,4 | 2,3 | conical | 60° | 45° Chamfer | |
| 41.316.066.01-2 | 1,6 | 20 N·cm | 6,6 | 1,9 | 4,7 | 5,2 | 1,9 | 2,3 | conical | 45° | 45° Chamfer | |

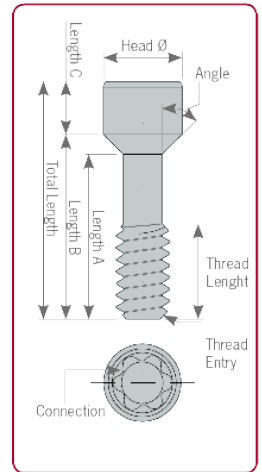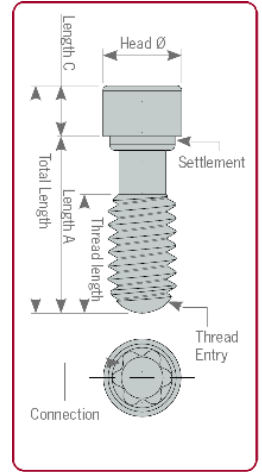

| REFERENCE | METRIC | TORQUE | TOTAL LENGTH | THREAD LENGTH | A LENGTH | B LENGTH | C LENGTH | HEAD DIAMETER | SEAT | ANGLE | THREAD ENTRY | CONNECTION |
|-----------------|--------|---------|--------------|---------------|----------|----------|----------|---------------|----------|-------|--------------|------------|
| 41.316.071.01-2 | 1,6 | 20 N-cm | 7,1 | 2,8 | 5,2 | 5,53 | 1,57 | 2,3 | conical | 60° | 45° Chamfer | |
| 41.316.072.01-2 | 1,6 | 20 N-cm | 7,2 | 3,5 | 5,2 | 5,85 | 1,35 | 2,3 | conical | 30° | 45° Chamfer | |
| 41.316.073.01-2 | 1,6 | 20 N-cm | 7,3 | 2,2 | 4,87 | 5,56 | 1,74 | 2,3 | conical | 35° | 45° Chamfer | |
| 41.316.074.01-2 | 1,6 | 20 N-cm | 7,4 | 2,7 | 5,5 | 6 | 1,4 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.316.076.01-2 | 1,6 | 20 N-cm | 7,6 | 3,6 | 6,1 | - | 1,5 | 2,3 | straight | - | Semi-sphere | |
| 41.316.078.01-2 | 1,6 | 20 N-cm | 7,8 | 2 | 5,36 | 7,03 | 0,81 | 2,3 | conical | 15° | 45° Chamfer | |
| 41.316.079.01-2 | 1,6 | 20 N-cm | 7,9 | 2.30 | 5,42 | 6.60 | 1,3 | 2,3 | conical | 20° | 45° Chamfer | |
| 41.316.079.02-2 | 1,6 | 20 N-cm | 7,9 | 3,9 | 6,3 | - | 1,6 | 2,3 | straight | - | 45° Chamfer | |
| 41.316.080.01-2 | 1,6 | 20 N-cm | 8 | 3,14 | 6,3 | 6,51 | 1,49 | 2,3 | conical | 60° | 45° Chamfer | |
| 41.316.081.01-2 | 1,6 | 20 N-cm | 8,1 | 3 | 6,35 | 6,72 | 1,38 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.316.084.01-2 | 1,6 | 20 N-cm | 8,4 | 3,5 | 6,8 | - | 1,6 | 2,3 | straight | - | Semi-sphere | |
| 41.316.084.02-2 | 1,6 | 20 N-cm | 8,4 | 2,7 | 5,85 | 6,85 | 1,55 | 2,3 | conical | 30° | 45° Chamfer | |
| 41.316.086.01-2 | 1,6 | 20 N-cm | 8,6 | 3 | 7,2 | - | 1,4 | 2,3 | straight | - | 45° Chamfer | |
| 41.316.094.01-2 | 1,6 | 20 N-cm | 9,4 | 2,9 | 7,65 | 8 | 1,4 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.316.108.01-2 | 1,6 | 20 N-cm | 10,8 | 2 | 5,36 | 7,03 | 0,81 | 2,3 | conical | 15° | 45° Chamfer | |
| 41.316.115.01-2 | 1,6 | 20 N-cm | 11,5 | 3,5 | 5,2 | 5,85 | 6,3 | 2,3 | conical | 30° | 45° Chamfer | |
| 41.316.118.01-2 | 1,6 | 20 N-cm | 11,8 | 3,6 | 6,1 | - | 5,7 | 2,3 | straight | - | Semi-sphere | |
| 41.316.124.01-2 | 1,6 | 20 N-cm | 12,4 | 2,2 | 4,74 | 5,56 | 5,24 | 2,3 | conical | 35° | 45° Chamfer | |
| 41.316.132.01-2 | 1,6 | 20 N-cm | 13,2 | 2,9 | 7,62 | 8 | 5,2 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.317.040.01-2 | N1-72 | 25 N-cm | 4 | 2,1 | 2,5 | - | 1,5 | 2,3 | sraight | - | 45° Chamfer | |
| 41.317.041.01-2 | N1-72 | 25 N-cm | 4,1 | 1,9 | 2,3 | 2,67 | 1,43 | 2,3 | conical | 55° | 45° Chamfer | |
| 41.317.065.01-2 | N1-72 | 25 N-cm | 6,5 | 2,4 | 4,7 | 5,18 | 1,33 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.317.070.01-2 | N1-72 | 25 N-cm | 7 | 2,2 | 4,96 | 5,8 | 1,2 | 2,3 | conical | 30° | 45° Chamfer | |
| 41.317.071.01-2 | N1-72 | 25 N-cm | 7,1 | 2,5 | 5,56 | 5,65 | 1,45 | 2,3 | conical | 70° | 45° Chamfer | |
| 41.317.072.01-2 | N1-72 | 25 N-cm | 7,2 | 2,5 | 5,5 | 5,77 | 1,43 | 2,3 | conical | 60° | 45° Chamfer | |
| 41.317.073.01-2 | N1-72 | 25 N-cm | 7,3 | 2,5 | 5,5 | 5,77 | 1,53 | 2,3 | conical | 60° | 45° Chamfer | |
| 41.317.106.01-2 | N1-72 | 25 N-cm | 10,6 | 2,6 | 5,54 | 5,65 | 4,95 | 2,3 | conical | 70° | Semi-sphere | |
| 41.318.043.01-2 | 1,8 | 25 N-cm | 4,3 | 2 | 2,52 | 2,7 | 1,6 | 2,3 | conical | 55° | 45° Chamfer | |
| 41.318.044.01-2 | 1,8 | 25 N-cm | 4,4 | 2,75 | 3 | - | 1,4 | 2,3 | straight | - | Semi-sphere | |



HEXALOBULAR
1,70



DYNAMIC SCREWS TECHNICAL SPECIFICATIONS

| REFERENCE | METRIC | TORQUE | TOTAL LENGTH | THREAD LENGTH | A LENGTH | B LENGTH | C LENGTH | HEAD DIAMETER | SEAT | ANGLE | THREAD ENTRY | CONNECTION |
|-----------------|--------|---------|--------------|---------------|----------|----------|----------|---------------|----------|-------|--------------|------------|
| 41.318.045.01-2 | 1,8 | 25 N·cm | 4,5 | 2,3 | 2,81 | 2,9 | 1,6 | 2,3 | conical | 70° | 45° Chamfer | |
| 41.318.048.01-2 | 1,8 | 25 N·cm | 4,8 | 2,8 | 3,22 | 3,65 | 1,15 | 2,3 | conical | 30° | Semi-sphere | |
| 41.318.051.01-2 | 1,8 | 25 N·cm | 5,1 | 2,7 | 3,55 | 3,7 | 1,4 | 2,3 | conical | 60° | 45° Chamfer | |
| 41.318.051.02-2 | 1,8 | 25 N·cm | 5,1 | 2,7 | 3,55 | 3,7 | 1,4 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.318.064.01-2 | 1,8 | 25 N·cm | 6,4 | 3,45 | 4,73 | 5,1 | 1,3 | 2,3 | conical | 35° | 45° Chamfer | |
| 41.318.065.01-2 | 1,8 | 25 N·cm | 6,5 | 2,8 | 5 | - | 1,5 | 2,3 | straight | - | Semi-sphere | |
| 41.318.067.01-2 | 1,8 | 25 N·cm | 6,7 | 2,35 | 5 | 5,4 | 1,3 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.318.068.01-2 | 1,8 | 25 N·cm | 6,8 | 4 | 5,25 | 5,4 | 1,4 | 2,3 | conical | 60° | 45° Chamfer | |
| 41.318.071.01-2 | 1,8 | 25 N·cm | 7,1 | 2,6 | 5,56 | 5,65 | 1,45 | 2,3 | conical | 70° | 45° Chamfer | |
| 41.318.074.01-2 | 1,8 | 25 N·cm | 7,4 | 3,8 | 5,8 | 6,03 | 1,6 | 2,3 | conical | 50° | 45° Chamfer | |
| 41.318.075.01-2 | 1,8 | 25 N·cm | 7,5 | 3,3 | 6,1 | - | 1,4 | 2,3 | straight | - | Semi-sphere | |
| 41.318.076.01-2 | 1,8 | 25 N·cm | 7,6 | 2,52 | 5,8 | 6,2 | 1,4 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.318.077.02-2 | 1,8 | 25 N·cm | 7,7 | 2 | 6,09 | 6,35 | 1,35 | 2,3 | conical | 60° | 45° Chamfer | |
| 41.318.080.01-2 | 1,8 | 25 N·cm | 8 | 4 | 6,5 | - | 1,5 | 2,3 | straight | - | 45° Chamfer | |
| 41.318.083.01-2 | 1,8 | 25 N·cm | 8,3 | 4,25 | 6,79 | 6,95 | 1,35 | 2,3 | conical | 60° | 45° Chamfer | |
| 41.320.038.01-2 | 2 | 25 N·cm | 3,81 | 1,6 | 3,25 | 2,35 | 1,39 | 2,35 | conical | 70° | 20° Chamfer | |
| 41.320.044.01-2 | 2 | 25 N·cm | 4,4 | 2,45 | 2,45 | 3,1 | 1,3 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.320.047.01-2 | 2 | 25 N·cm | 4,7 | 3 | 3,3 | - | 1,4 | 2,3 | straight | - | Semi-sphere | |
| 41.320.048.01-2 | 2 | 25 N·cm | 4,8 | 2,7 | 3,3 | 3,4 | 1,4 | 2,3 | conical | 60° | 45° Chamfer | |
| 41.320.050.01-2 | 2 | 25 N·cm | 5 | 2,8 | 3,39 | 3,6 | 1,4 | 2,3 | conical | 30° | Semi-sphere | |
| 41.320.051.01-2 | 2 | 25 N·cm | 5,1 | 3,1 | 3,6 | - | 1,5 | 2,3 | straight | - | Semi-sphere | |
| 41.320.060.01-2 | 2 | 25 N·cm | 6 | 2,7 | 4,5 | - | 1,5 | 2,3 | straight | - | Semi-sphere | |
| 41.320.065.01-2 | 2 | 25 N·cm | 6,5 | 2,7 | 5 | - | 1,5 | 2,3 | straight | - | 45° Chamfer | |
| 41.320.067.01-2 | 2 | 25 N·cm | 6,7 | 2,3 | 3,65 | 5,68 | 1,02 | 2,58 | conical | 15° | 45° Chamfer | |
| 41.320.068.01-2 | 2 | 25 N·cm | 6,8 | 4,4 | 5,3 | 5,4 | 1,4 | 2,3 | conical | 60° | 45° Chamfer | |

Hexabobular
1,70

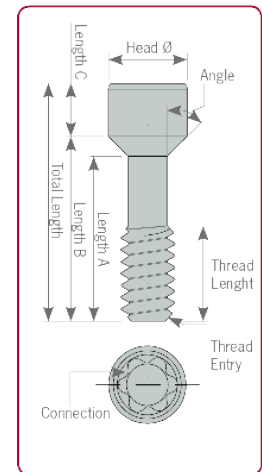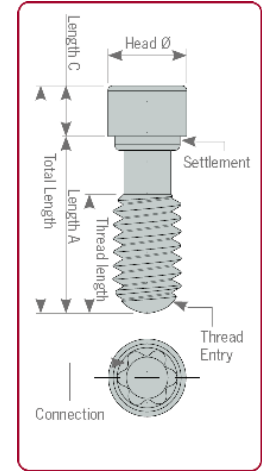

| REFERENCE | METRIC | TORQUE | TOTAL LENGTH | THREAD LENGTH | A LENGTH | B LENGTH | C LENGTH | HEAD DIAMETER | SEAT | ANGLE | THREAD ENTRY | CONNECTION |
|-----------------|--------|---------|--------------|---------------|----------|----------|----------|---------------|----------|-------|--------------|---------------------|
| 41.320.070.01-2 | 2 | 25 N-cm | 7 | 3 | 5,6 | - | 1,4 | 2,3 | straight | - | Semi-sphere | Hexalobular 1,70 |
| 41.320.074.01-2 | 2 | 25 N-cm | 7,4 | 3,3 | 6 | - | 1,4 | 2,3 | straight | - | Semi-sphere | |
| 41.320.075.01-2 | 2 | 25 N-cm | 7,5 | 2,75 | 5,93 | 6,18 | 1,32 | 2,3 | conical | 35° | 45° Chamfer | |
| 41.320.079.01-2 | 2 | 25 N-cm | 7,9 | 3,3 | 6,33 | 6,5 | 1,4 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.320.082.01-2 | 2 | 25 N-cm | 8,2 | 4,7 | 6,7 | - | 1,5 | 2,4 | straight | - | Semi-sphere | |
| 41.320.090.01-2 | 2 | 25 N-cm | 9 | 4 | 7,5 | - | 1,5 | 2,3 | straight | - | Semi-sphere | |
| 41.320.094.01-2 | 2 | 25 N-cm | 9,4 | 3 | 7,85 | 8 | 1,4 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.320.117.01-2 | 2 | 25 N-cm | 11,7 | 2,75 | 5,9 | 6,18 | 5,52 | 2,3 | conical | 35° | Semi-sphere | |
| 41.320.125.01-2 | 2 | 25 N-cm | 12,5 | 3,3 | 6,33 | 6,5 | 6 | 2,3 | conical | 45° | 45° Chamfer | |
| 41.320.129.01-2 | 2 | 25 N-cm | 12,9 | 4,7 | 6,7 | - | 6,2 | 2,4 | straight | - | Semi-sphere | |
| 41.320.137.01-2 | 2 | 25 N-cm | 13,7 | 4 | 12,2 | - | 1,5 | 2,3 | straight | - | Semi-sphere | |
| 41.325.054.01-2 | 2,5 | 25 N-cm | 5,4 | 3,8 | 4,1 | - | 1,3 | 2,85 | straight | - | Semi-sphere | |
| 41.325.067.01-2 | 2,5 | 25 N-cm | 6,7 | 4,6 | 5,1 | - | 1,6 | 2,85 | straight | - | Semi-sphere | |

DYNAMIC SCREWDRIVER & DYNAMIC SCREWS

Dynamic Screwdrivers

Screwdriver with hexalobular head, exclusively to the 3.0 Dynamic Abutment® system.

Lengths:
18, 24, 32mm.



Dynamic Screws are used with the Dynamic TiBase® or milled structures with an angled screw channel.

Made of Titanium grade V.



High Dynamic Screw

Dynamic Screw





Dynamic Screw Transfer

49.413.000.01-2

STRAIGHT SCREWS TECHNICAL SPECIFICATIONS

| REFERENCE | METRIC | TORQUE | TOTAL LENGTH | THREAD LENGTH | A LENGTH | B LENGTH | C LENGTH | HEAD DIAMETER | SEAT | ANGLE | THREAD ENTRY | CONNECTION |
|-----------------|--------|---------|--------------|---------------|----------|----------|----------|---------------|----------|-------|--------------|------------|
| 40.312.003.01-2 | 1,2 | 15 N-cm | 7,85 | 2,7 | 6,19 | 6,55 | 1,3 | 1,9 | conical | 45° | 45° Chamfer | Hex. 1,20 |
| 40.314.003.01-2 | 1,4 | 15 N-cm | 3,9 | 1,91 | 2,1 | - | 1,8 | 2,4 | straight | - | 45° Chamfer | Hex. 1,20 |
| 40.314.003.02-2 | 1,4 | 15 N-cm | 4 | 2 | 2,2 | - | 1,8 | 2,3 | straight | - | 45° Chamfer | Hex. 1,20 |
| 40.314.003.03-2 | 1,4 | 15 N-cm | 7,6 | 2,4 | 6,05 | 6,3 | 1,3 | 1,9 | conical | 45° | 45° Chamfer | Hex. 1,20 |
| 40.314.003.04-2 | 1,4 | 15 N-cm | 7,5 | 2,5 | 5,45 | 5,7 | 1,8 | 1,85 | conical | 45° | 45° Chamfer | Hex. 1,20 |
| 40.314.004.01-2 | 1,4 | 15 N-cm | 6,3 | 1,7 | 4,6 | 5,1 | 1,2 | 2,1 | conical | 25° | 30° Chamfer | Hex. 1,25 |
| 40.314.004.02-2 | 1,4 | 15 N-cm | 8,4 | 2,5 | 5,99 | 6,7 | 1,7 | 2 | conical | 35° | 45° Chamfer | Hex. 1,25 |
| 40.314.004.03-2 | 1,4 | 15 N-cm | 4,3 | 1,8 | 2,3 | - | 2 | 2 | straight | - | 45° Chamfer | Hex. 1,25 |
| 40.314.005.01-2 | 1,4 | 15 N-cm | 7,6 | 3,55 | 5,17 | 6 | 1,6 | 2,15 | conical | 25° | 45° Chamfer | Hex. 1,27 |
| 40.314.005.02-2 | 1,4 | 15 N-cm | 7,5 | 2,5 | 5,5 | 5,7 | 1,7 | 2,1 | conical | 60° | 45° Chamfer | Hex. 1,27 |
| 40.314.005.04-2 | 1,4 | 15 N-cm | 4 | 1,70 | 2,25 | - | 1,75 | 2,10 | straight | - | 45° Chamfer | Hex. 1,27 |
| 40.314.007.01-2 | 1,4 | 15 N-cm | 4 | 1,8 | 2,01 | 2,8 | 1,2 | 2,2 | conical | 35° | 45° Chamfer | Torx T6 |
| 40.314.007.02-2 | 1,4 | 15 N-cm | 7 | 2,1 | 4,75 | 2,25 | 0,8 | 2,1 | conical | 15° | 45° Chamfer | Torx T6 |
| 40.314.008.01-2 | 1,4 | 15 N-cm | 3,5 | 1,8 | 2,1 | - | 1,4 | 2 | straight | - | 45° Chamfer | Unigrip |
| 40.314.008.02-2 | 1,4 | 15 N-cm | 6,7 | 2,5 | 4,87 | 5,3 | 1,4 | 1,8 | conical | 35° | 45° Chamfer | Unigrip |
| 40.314.012.01-2 | 1,4 | 15 N-cm | 4,5 | 1,7 | 2,01 | 2,4 | 2,1 | 2,15 | conical | 45° | 45° Chamfer | Star 1,50 |
| 40.314.014.01-2 | 1,4 | 15 N-cm | 4,45 | 2 | 2,48 | - | 1,97 | 2,16 | straight | - | 45° Chamfer | Hex. 1,19 |
| 40.316.002.01-2 | 1,6 | 20 N-cm | 7 | 2,79 | 4,86 | 5,44 | 1,56 | 2,3 | conical | 45° | 45° Chamfer | Sq. 1,30 |
| 40.316.002.02-2 | 1,6 | 20 N-cm | 9,3 | 3,3 | 7,3 | - | 2 | 2,3 | straight | - | Semi-sphere | Sq. 1,30 |
| 40.316.003.01-2 | 1,6 | 20 N-cm | 8,4 | 2,5 | 6,6 | - | 1,8 | 2 | straight | - | 45° Chamfer | Hex. 1,20 |
| 40.316.003.02-2 | 1,6 | 20 N-cm | 10,2 | 2 | 7,88 | 8,2 | 2 | 2,2 | conical | 45° | 45° Chamfer | Hex. 1,20 |
| 40.316.004.01-2 | 1,6 | 20 N-cm | 8,6 | 2,7 | 6,16 | 6,9 | 1,7 | 2 | conical | 30° | 45° Chamfer | Hex. 1,25 |
| 40.316.004.02-2 | 1,6 | 20 N-cm | 8,8 | 3 | 6,73 | 6,8 | 1,8 | 2,1 | conical | 45° | 45° Chamfer | Hex. 1,25 |
| 40.316.004.03-2 | 1,6 | 20 N-cm | 6,9 | 2,2 | 5,02 | 5,2 | 1,7 | 1,92 | conical | 60° | 45° Chamfer | Hex. 1,25 |
| 40.316.005.01-2 | 1,6 | 20 N-cm | 7,5 | 3,6 | 5,33 | 5,85 | 1,65 | 2,15 | conical | 30° | 45° Chamfer | Hex. 1,27 |
| 40.316.005.02-2 | 1,6 | 20 N-cm | 8,2 | 3,03 | 6,25 | - | 2 | 2,33 | straight | - | 45° Chamfer | Hex. 1,27 |
| 40.316.005.04-2 | 1,6 | 20 N-cm | 10,5 | 2,9 | 8,15 | 8,4 | 2,1 | 2,1 | conical | 45° | 45° Chamfer | Hex. 1,27 |

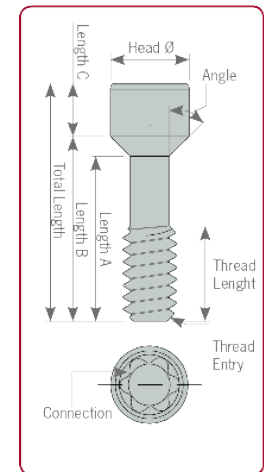
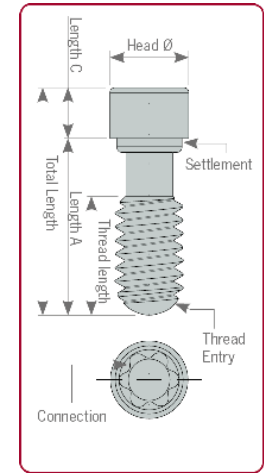


| REFERENCE | METRIC | TORQUE | TOTAL LENGTH | THREAD LENGTH | A LENGTH | B LENGTH | C LENGTH | HEAD DIAMETER | SEAT | ANGLE | THREAD ENTRY | CONNECTION |
|------------------|--------|---------|--------------|---------------|----------|----------|----------|---------------|----------|-------|--------------|------------|
| 40.316.005.05-2 | 1,6 | 20 N-cm | 7,6 | 2,7 | 5,21 | 5,5 | 2,1 | 2,1 | conical | 60° | 45° Chamfer | Hex. 1,27 |
| 40.316.005.06-2 | 1,6 | 20 N-cm | 3,6 | 1,8 | 2,2 | - | 1,4 | 2,1 | straight | - | 45° Chamfer | Hex. 1,27 |
| 40.316.005.07-2 | 1,6 | 20 N-cm | 8,8 | 2,85 | 6,73 | 6,9 | 1,9 | 2,15 | conical | 60 | 45° Chamfer | Hex. 1,27 |
| 40.316.005.08-2 | 1,6 | 20 N-cm | 9 | 3,9 | 0 | 6,9 | 2,1 | 2,18 | conical | 45° | 45° Chamfer | Hex. 1,27 |
| 40.316.0 07.01-2 | 1,6 | 20 N-cm | 7,9 | 2 | 5,72 | 6,9 | 2,18 | 2,18 | conical | 15° | 45° Chamfer | Torx T6 |
| 40.316.008.01-2 | 1,6 | 20 N-cm | 7 | 2,7 | 5,15 | - | 1,8 | 2,3 | straight | - | 45° Chamfer | Unigrip |
| 40.316.008.02-2 | 1,6 | 20 N-cm | 7,3 | 2,7 | 5,15 | 5,9 | 1,4 | 2,2 | conical | 35° | 45° Chamfer | Unigrip |
| 40.316.012.01-2 | 1,6 | 20 N-cm | 8 | 2,65 | 5,53 | 6 | 2 | 2,15 | conical | 45° | 45° Chamfer | Star 1,50 |
| 40.316.014.01-2 | 1,6 | 20 N-cm | 7,9 | 2,3 | 5,42 | 6,46 | 1,44 | 2,2 | conical | 20° | 45° Chamfer | Hex. 1,19 |
| 40.317.002.01-2 | N1-72 | 25 N-cm | 8,17 | 3 | 5,31 | 5,87 | 2,3 | 2,4 | conical | 45° | 45° Chamfer | Sq. 1,30 |
| 40.317.004.01-2 | N1-72 | 25 N-cm | 7,6 | 2,8 | 5,6 | 5,76 | 1,84 | 2,3 | conical | 70° | 45° Chamfer | Hex. 1,27 |
| 40.317.004.02-2 | N1-72 | 25 N-cm | 7,52 | 2,2 | 5,12 | 5,773 | 1,75 | 2,1 | conical | 30° | 45° Chamfer | Hex. 1,25 |
| 40.317.005.01-2 | N1-72 | 25 N-cm | 7,6 | 2,5 | 5,19 | 5,42 | 2,18 | 2,2 | conical | 60° | 45° Chamfer | Hex. 1,27 |
| 40.317.005.02-2 | N1-72 | 25 N-cm | 7,2 | 2,4 | 4,73 | 5,25 | 1,95 | 2,4 | conical | 45° | 45° Chamfer | Hex. 1,27 |
| 40.318.002.01-2 | 1,8 | 25 N-cm | 7 | 3,2 | 5,2 | - | 1,8 | 2,5 | straight | - | 45° Chamfer | Sq. 1,30 |
| 40.318.002.02-2 | 1,8 | 25 N-cm | 8,3 | 2,6 | 6,6 | - | 1,7 | 2,45 | straight | - | 45° Chamfer | Sq. 1,30 |
| 40.318.003.01-2 | 1,8 | 25 N-cm | 6,8 | 3,3 | 5,2 | - | 1,6 | 2,3 | straight | - | 45° Chamfer | Hex. 1,20 |
| 40.318.003.02-2 | 1,8 | 25 N-cm | 8 | 3,6 | 6 | - | 2 | 2,1 | straight | - | 45° Chamfer | Hex. 1,20 |
| 40.318.004.01-2 | 1,8 | 25 N-cm | 7,2 | 4,47 | 2,3 | 6,2 | 1 | 2,4 | conical | 30° | 45° Chamfer | Hex. 1,25 |
| 40.318.004.02-2 | 1,8 | 25 N-cm | 9,8 | 5,094 | 8,3 | 8,8 | 1 | 2,4 | conical | 30° | 45° Chamfer | Hex. 1,25 |
| 40.318.004.03-2 | 1,8 | 25 N-cm | 7,65 | 3,3 | 5,17 | 5,75 | 1,9 | 2,4 | conical | 35° | 45° Chamfer | Hex. 1,25 |
| 40.318.005.01-2 | 1,8 | 25 N-cm | 4,5 | 2,3 | 2,8 | 2,9 | 1,6 | 2,35 | conical | 70° | 45° Chamfer | Hex. 1,27 |
| 40.318.005.02-2 | 1,8 | 25 N-cm | 7,6 | 3,8 | 5,8 | 6,05 | 1,55 | 2,35 | conical | 50° | 45° Chamfer | Hex. 1,27 |
| 40.318.006.01-2 | 1,8 | 25 N-cm | 6 | 3,18 | 3,5 | 3,85 | 2,15 | 2,4 | conical | 45° | 45° Chamfer | Hex. 1,50 |
| 40.318.007.01-2 | 1,8 | 25 N-cm | 9,1 | 4,25 | 7,22 | 7,45 | 1,65 | 2,18 | conical | 60° | 45° Chamfer | Torx T6 |
| 40.318.008.01-2 | 1,8 | 25 N-cm | 8,3 | 2,5 | 6,5 | - | 1,8 | 2,45 | straight | - | 45° Chamfer | Unigrip |



STRAIGHT SCREWS TECHNICAL SPECIFICATIONS

| REFERENCE | METRIC | TORQUE | TOTAL LENGTH | THREAD LENGTH | A LENGTH | B LENGTH | C LENGTH | HEAD DIAMETER | SEAT | ANGLE | THREAD ENTRY | CONNECTION |
|-----------------|--------|---------|--------------|---------------|----------|----------|----------|---------------|----------|-------|--------------|------------|
| 40.318.012.01-2 | 1,8 | 25 N-cm | 7,25 | 2,4 | 4,93 | 5,25 | 2 | 2,15 | conical | 45° | 45° Chamfer | Sq. 1,50 |
| 40.318.012.02-2 | 1,8 | 25 N-cm | 8 | 2,6 | 5,68 | 6 | 2 | 2,15 | conical | 45° | 45° Chamfer | Sq. 1,50 |
| 40.318.013.01-2 | 1,8 | 25 N-cm | 8 | 2,5 | 6,01 | 6,7 | 1,3 | 2,2 | conical | 30° | 45° Chamfer | Hex. 1,00 |
| 40.320.002.01-2 | 2 | 30 N-cm | 5 | 3,06 | 3,26 | 3,5 | 1,5 | 2,49 | conical | 45° | 45° Chamfer | Sq. 1,30 |
| 40.320.002.02-2 | 2 | 30 N-cm | 7,45 | 3 | 5,7 | 5,9 | 1,5 | 2,4 | conical | 45° | 45° Chamfer | Sq. 1,30 |
| 40.320.002.03-2 | 2 | 30 N-cm | 10,2 | 3,15 | 8,4 | - | 1,8 | 2,45 | straight | - | 45° Chamfer | Sq. 1,30 |
| 40.320.003.01-2 | 2 | 30 N-cm | 4,7 | 2,7 | 3,33 | - | 1,37 | 2,35 | straight | - | 45° Chamfer | Hex. 1,20 |
| 40.320.003.02-2 | 2 | 30 N-cm | 7 | 3,25 | 5 | - | 2 | 2,4 | straight | - | 45° Chamfer | Hex. 1,20 |
| 40.320.003.03-2 | 2 | 30 N-cm | 7,9 | 3,7 | 5,55 | 6,05 | 1,85 | 2,4 | conical | 45° | 45° Chamfer | Hex. 1,20 |
| 40.320.003.04-2 | 2 | 30 N-cm | 8,4 | 2,75 | 5,68 | 6,35 | 2,05 | 2,3 | conical | 45° | 45° Chamfer | Hex. 1,20 |
| 40.320.003.05-2 | 2 | 30 N-cm | 4,8 | 3,3 | 3,65 | 3,9 | 0,9 | 2,45 | conical | 45° | 45° Chamfer | Hex. 1,20 |
| 40.320.005.01-2 | 2 | 30 N-cm | 7,6 | 3,7 | 6 | - | 1,6 | 2,4 | straight | - | 45° Chamfer | Hex. 1,27 |
| 40.320.005.02-2 | 2 | 30 N-cm | 10,3 | 4 | 8,3 | - | 2 | 2,45 | straight | - | 45° Chamfer | Hex. 1,27 |
| 40.320.005.03-2 | 2 | 30 N-cm | 10,3 | 3,5 | 8,3 | - | 2 | 2,33 | straight | - | 45° Chamfer | Hex. 1,27 |
| 40.320.005.04-2 | 2 | 30 N-cm | 10,5 | 3,06 | 8,15 | 8,4 | 2,1 | 2,5 | conical | 45° | 45° Chamfer | Hex. 1,27 |
| 40.320.007.01-2 | 2 | 30 N-cm | 6,7 | 2,25 | 3,59 | 5,7 | 1 | 2,58 | conical | 15° | 45° Chamfer | Torx T6 |
| 40.320.007.02-2 | 2 | 30 N-cm | 7,4 | 3,3 | 6 | - | 1,4 | 2,3 | straight | - | Semi-sphere | Torx T6 |
| 40.320.007.03-2 | 2 | 30 N-cm | 7,6 | 3 | 6,1 | 6,3 | 1,3 | 2,4 | conical | 45° | Semi-sphere | Torx T6 |
| 40.320.007.04-2 | 2 | 30 N-cm | 4,5 | 2,96 | 3,21 | 3,5 | 1 | 2,45 | conical | 45° | 45° Chamfer | Torx T6 |
| 40.320.008.01-2 | 2 | 30 N-cm | 7 | 3,25 | 5 | - | 2 | 2,4 | straight | - | 45° Chamfer | Unigrip |
| 40.320.008.02-2 | 2 | 30 N-cm | 7,3 | 3 | 5,8 | 6,2 | 1,1 | 2,5 | conical | 35° | 45° Chamfer | Unigrip |
| 40.320.008.03-2 | 2 | 30 N-cm | 10 | 3,6 | 8,5 | - | 1,5 | 2,45 | straight | - | 45° Chamfer | Unigrip |
| 40.325.002.01-2 | 2,5 | 30 N-cm | 7,41 | 3,5 | 4,75 | 5,29 | 2,12 | 2,87 | conical | 45° | Semi-sphere | Sq. 1,30 |
| 40.325.008.01-2 | 2,5 | 30 N-cm | 7 | 2,8 | 5,6 | - | 1,4 | 3,4 | straight | - | 45° Chamfer | Unigrip |

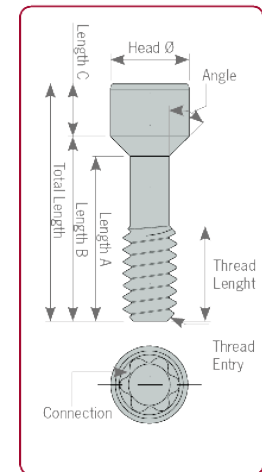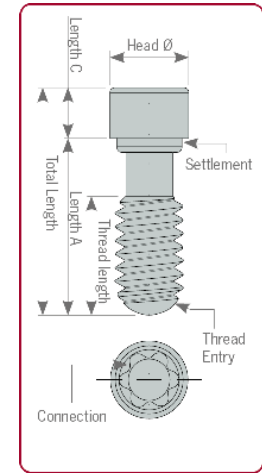

SCREWDRIVERS & STRAIGHT SCREWS

Screwdrivers




Straight screws cover all the thread metrics available on the market. We have several lengths for each metric to make the adaptation to the milled structures easier. Made of Titanium grade V.




Straight Screws

DYNAMIC SYSTEM SCANBODIES AND COLORS ACCORDING TO COMPATIBILITY

| CONNECTION | LIBRARY CODE | SCANBODY TYPE | MIDDLE PIECE | MAGNET SCREW |
|------------------------------|--------------|---------------|--------------|--------------|
| Branemark RP | 0024 | HA | N/A | |
| Zimmer NP | 0040 | | | |
| NB Active RP | 0022 | | | |
| Biomet 3i Certain RP | 0002 | | | |
| Osstem TS RP | 0030 | | | |
| Astra Evolution 4,2 | 0007 | | | |
| MIS C1 RP | 0017 | | | |
| S&M Outlink 4,10 | 0064 | | | N/A |
| Biomet 3i Certain WP | 0057 | | | |
| GH 3 Neodent GM | 0186 | | | |
| Zimmer RP | 0041 | HB | | |
| Astra Lilac | 0005 | | | |
| Bego S/RI 4,5 | 0052 | | | |
| Astra Evolution 4,8 | 0091 | | | |
| MIS C1 WP | 0018 | | | |
| Branemark NP | 0023 | HC | N/A | |
| Astra Aqua | 0004 | | | |
| NB Active NP | 0021 | | | |
| Biomet 3i Certain NP | 0001 | | | |
| Osstem TS NP | 0029 | | | |
| Klockner Vega RV | 0083 | | | |
| Xive S 3,4 | 0038 | | | |
| GH 3 Straumann BLX RB | 0207 | | | |
| GH 3 Straumann BLX WB | 0208 | | | |
| Biomet 3i Osseotite NP | 0003 | | HD | N/A |
| Megagen AnyRidge RP | 0015 | | | |
| S&M Premium Khono 3,30 | 0031 | | | |
| SIC SICACE 3,3 | 0170 | | | |




| CONNECTION | LIBRARY CODE | SCANBODY TYPE | MIDDLE PIECE | MAGNET SCREW |
|-------------------------------|--------------|---------------|--------------|--------------|
| Astra Evolution 3,6 | 0006 | HE | | |
| MIS M4 NP | 0019 | | | |
| Klockner Vega NV | 0082 | | | |
| S&M Outlink 3,30 | 0063 | | | |
| Keystone Prima NP | 0044 | | | |
| Ankylos | 0075 | | | |
| GH 3 SGS Dental CC | 0225 | | | |
| GH 3 Paltop Advanced + | 0229 | | | |
| Straumann Bone Level NP | 0033 | SA | | |
| MIS C1 NP | 0016 | | | |
| Straumann Bone Level RP | 0035 | SB | | |
| NB Replace 3,5 | 0026 | TA | | |
| Camlog Screw-Line 3,8 | 0011 | | | |
| Conelog Screw-Line 3,8 | 0120 | | | |
| NB Replace 4,3 | 0027 | TB | | |
| Camlog Screw-Line 4,3 | 0012 | | | |
| NB Replace 5,0 | 0028 | | | |
| Conelog Screw-Line 4,3 | 0121 | | | |
| Camlog Screw-Line 5,0 | 0088 | | | |
| Camlog Screw-Line 6,0 | 0088 | | | |
| Straumann Synocta 4,8 | 0074 | OA | N/A | |
| Straumann Oct. Interno 4,8 | 0037 | | | |
| Straumann Oct. Interno 6,5 | 0096 | | | |
| Multi Unit RP | 0025 | MA | N/A | |
| NB Multi Unit RP | 0025 | MB | N/A | |
| MIS Multi Unit St | 0020 | | N/A | |
| Anthogyr Multi-Unit 4,8 | 0163 | | N/A | |
| Lasak Multi-Unit QN/QR | 0168 | | N/A | |
| Zimmer Tapered Screw-Vent | 0205 | | N/A | |
| Paltop MU | 0181 | | N/A | |




DYNAMIC SYSTEM SCANBODIES AND COLORS ACCORDING TO COMPATIBILITY

| CONNECTION | LIBRARY CODE | SCANBODY TYPE | MIDDLE PIECE | MAGNET SCREW |
|------------------------------|--------------|---------------|--------------|--------------|
| Astra Evolution Uni-Abutment | 0008 | HF | N/A | |
| BTI External NP | 0009 | HG | N/A | |
| Xive S 3,8 | 0039 | | | |
| Bego Mini | 0187 | | N/A | |
| BTI Internal RP | 0010 | SC | | |
| BTI Internal WP | | | | |
| Bego RS/RXS 3 | 0049 | HH | | |
| Bego S/RI 3,25-3,75 | 0050 | HI | | |
| Medentis ICX-Templant 4,1 | 0125 | | | |
| Xive S 4,5 | 0085 | | | |
| Alphabio Conical Std. Conn. | 0169 | | | |
| Lasak Bioniq QR | 0167 | | | |
| SIC SICACE 4,2 | 0171 | | | |
| Bredent SKY NP | 0110 | | | |
| Bredent SKY RP | | | | |
| Bego S/RI 4,1 | 0051 | | | |
| Biomet 3i Osseotite WP | 0058 | | HJ | N/A |
| Keystone Prima RP | 0045 | | | |
| Klockner Essential Cone 4,5 | 0054 | OB | | |
| S&M Premium Khono 3,80 | 0032 | OH | | |
| S&M Premium Khono 4,25 | 0065 | HL | | |
| BTI External WP | 0060 | HM | N/A | |
| BTI Multi-IM Universal | 0151 | HN | N/A | |
| Neoss 3,4 | 0047 | | | |
| Neoss 4,1 | | | | |
| Zimmer WP | 0080 | HO | | |
| NB Branemark WP | 0061 | HP | N/A | |
| NB Active WP | 0124 | | | |
| Keystone Prima WP | 0046 | | | |




| CONNECTION | LIBRARY CODE | SCANBODY TYPE | MIDDLE PIECE | MAGNET SCREW | |
|--------------------------------------|--------------|---------------|--------------|--------------|--|
| Bego S/RI 5,5 | 0081 | HR | | | |
| Dentaurum Tiologic S | 0130 | PA | | | |
| Dentaurum Tiologic M | 0131 | | | | |
| Dentaurum Tiologic L | 0132 | | | | |
| Astra Evolution 3,0 | 0090 | | | | |
| Astra Yellow | 0109 | HS | | | |
| NB Active 3,0 | 0159 | | | | |
| Alphabio Conical Hex. Conn. | 0136 | | | | |
| Biotech Dental Kontakt XNP | 0164 | | | | |
| Biohorizons 3,0 | 0102 | | | | |
| Lasak Bioniq QN | 0166 | | | | |
| DIO UF NP | 0014 | | | | |
| Adin Touareg/Closefit NP | 0145 | | | | |
| Adin Touareg/Closefit UNP | 0188 | | | | |
| GH 3 SGS Dental Narrow CC | 0226 | | | | |
| Astra Evolution 5,4 | 0092 | | HT | | |
| NB Replace 6,0 | 0129 | | TC | | |
| Straumann Synocta 3,5 | 0160 | | SD | | |
| GH 3 Straumann Bone Level 2,9 | 0235 | | | | |
| Anthogyr Axiom REG/PX XNP | 0161 | TD | | | |
| Anthogyr Axiom REG/PX RP | | | | | |
| Anthogyr Axiom REG/PX WP | | | | | |
| Biotech Dental Kontakt RP | 0165 | | | | |
| Camlog Screw-Line 3,3 | 0087 | | | | |
| Conelog Screw-Line 3,3 | 0119 | | | | |
| Str. Screw-Retained NC/RC | 0101 | DA | N/A | | |
| Straumann Synocta 6,5 | 0137 | OC | N/A | | |
| Bego Multi-Plus | 0150 | MC | N/A | | |
| Ankylos Balance Base | 0183 | MD | N/A | | |



| MAIN COMPATIBILITY | REFERENCE | CUTTING DIAMETER | SEAT | CUTTING LENGTH | USEFUL LENGTH (max. drilling depth) | STEM CUTTING DIAMETER | SUPPORT DIAMETER (SHANK) | TOTAL LENGTH |
|--|-----------------|------------------|----------|----------------|--|-----------------------|--------------------------|--------------|
| | | \varnothing_c | α | L_c | L_u | \varnothing_v | \varnothing_s | L_t |
| BEGO RS/RSX 3* ASTRA EVOLUTION 3.0* <small>*Only for titanium and soft materials</small> | 33.325.472.01-2 | 1,4 | 25 | 0,4 | 4,7 | 0,5 | 3 | 50 |
| | 33.425.472.01-2 | 1,4 | 25 | 0,4 | 4,7 | 0,5 | 4 | 50 |
| | 33.625.472.01-2 | 1,4 | 25 | 0,4 | 4,7 | 0,5 | 6 | 50 |
| STRAUMANN BONE LEVEL NP STRAUMANN BONE LEVEL RP MEDENTIS ICX TEMPLANT 4.1 STRAUMANN SYNOCTA 3.5 | 33.315.804.01-2 | 1,6 | 15 | 0,7 | 8 | 0,65 | 3 | 50 |
| | 33.415.804.01-2 | 1,6 | 15 | 0,7 | 8 | 0,65 | 4 | 50 |
| | 33.615.804.01-2 | 1,6 | 15 | 0,7 | 8 | 0,65 | 6 | 50 |
| ANTHOGRYR AXIOM RG/PX XNP ANTHOGRYR AXIOM RG/PX RP ANTHOGRYR AXIOM RG/PX WP | 33.320.704.01-2 | 1,6 | 20 | 0,7 | 7 | 0,8 | 3 | 50 |
| | 33.420.704.01-2 | 1,6 | 20 | 0,7 | 7 | 0,8 | 4 | 50 |
| | 33.620.704.01-2 | 1,6 | 20 | 0,7 | 7 | 0,8 | 6 | 50 |
| ASTRA EVOLUTION 3.6 ANKYLOS ALPHABIO CONICAL STANDARD CONNECTION LASAK BIONIQ QR NEODENT GM ANKYLOS BALANCE BASE | 33.330.734.01-2 | 1,6 | 30 | 0,7 | 7,3 | 0,8 | 3 | 50 |
| | 33.430.734.01-2 | 1,6 | 30 | 0,7 | 7,3 | 0,8 | 4 | 50 |
| | 33.630.734.01-2 | 1,6 | 30 | 0,7 | 7,3 | 0,8 | 6 | 50 |
| NOBEL BIOCARE ACTIVE NP NOBEL BIOCARE ACTIVE 3.0 LASAK BIONIQ QN | 33.335.754.01-2 | 1,6 | 35 | 0,7 | 7,5 | 0,65 | 3 | 50 |
| | 33.435.754.01-2 | 1,6 | 35 | 0,7 | 7,5 | 0,65 | 4 | 50 |
| | 33.635.754.01-2 | 1,6 | 35 | 0,7 | 7,5 | 0,65 | 6 | 50 |
| OSSTEM TS NP CAMLOG SCREW LINE 3.8 NP CAMLOG SCREW LINE 4.3 RP KLOCKNER VEGA NW NVE S 3,4 BIOTECH DENTAL KONTAKT XNP BIOTECH DENTAL KONTAKT RP DIO UF NP CAMLOG SCREW-LINE 3,3 | 33.345.804.01-2 | 1,6 | 45 | 0,7 | 8 | 0,65 | 3 | 50 |
| | 33.445.804.01-2 | 1,6 | 45 | 0,7 | 8 | 0,65 | 4 | 50 |
| | 33.645.804.01-2 | 1,6 | 45 | 0,7 | 8 | 0,65 | 6 | 50 |
| MIS C1 NP MIS M4 NP CONOLOG 3,8 CONOLOG 4,3 ASTRA YELLOW ALPHABIO CONICAL HEX CONNECTION | 33.360.754.01-2 | 1,6 | 60 | 0,7 | 7,5 | 0,65 | 3 | 50 |
| | 33.460.754.01-2 | 1,6 | 60 | 0,7 | 7,5 | 0,65 | 4 | 50 |
| | 33.660.754.01-2 | 1,6 | 60 | 0,7 | 7,5 | 0,65 | 6 | 50 |
| BIOMET 3i CERTAIN NP ASTRA AQUA | 33.390.754.01-2 | 1,6 | 90 | 0,7 | 7,5 | 0,65 | 3 | 50 |
| | 33.490.754.01-2 | 1,6 | 90 | 0,7 | 7,5 | 0,65 | 4 | 50 |
| | 33.690.754.01-2 | 1,6 | 90 | 0,7 | 7,5 | 0,65 | 6 | 50 |
| ASTRA EVOLUTION 4.2 | 33.350.775.01-2 | 1,7 | 50 | 0,7 | 7,7 | 0,8 | 3 | 50 |
| | 33.450.775.01-2 | 1,7 | 50 | 0,7 | 7,7 | 0,8 | 4 | 50 |
| | 33.650.775.01-2 | 1,7 | 50 | 0,7 | 7,7 | 0,8 | 6 | 50 |
| BIOMET 3i CERTAIN RP NOBEL BIOCARE BRANEMARK NP NOBEL BIOCARE REPLACE NP MEGAGEN ANYRIDGE RP BIOMET 3i CERTAIN WP | 33.390.805.01-2 | 1,7 | 90 | 0,7 | 8 | 0,65 | 3 | 50 |
| | 33.490.805.01-2 | 1,7 | 90 | 0,7 | 8 | 0,65 | 4 | 50 |
| | 33.690.805.01-2 | 1,7 | 90 | 0,7 | 8 | 0,65 | 6 | 50 |
| BEGO S/RI 3.25-3.75 BEGO S/RI 4.1 BEGO S/RI 4.5 BEGO S/RI 5.50 STRAUMANN SCREW-RETAINED NC/RC BEGO MULT-PLUS | 33.335.676.01-2 | 1,8 | 35 | 1 | 6,7 | 0,9 | 3 | 50 |
| | 33.435.676.01-2 | 1,8 | 35 | 1 | 6,7 | 0,9 | 4 | 50 |
| | 33.635.676.01-2 | 1,8 | 35 | 1 | 6,7 | 0,9 | 6 | 50 |

DYNAMIC MILLING TOOL SPECIFICATIONS

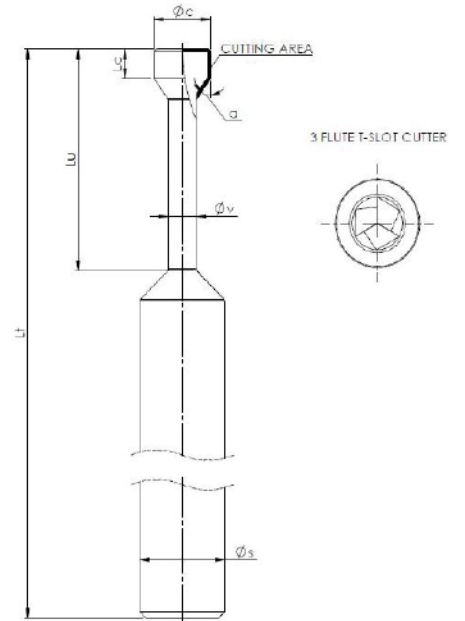

| MAIN COMPATIBILITY | REFERENCE | CUTTING DIAMETER | SEAT | CUTTING LENGTH | USEFUL LENGTH (max. drilling depth) | STEM CUTTING DIAMETER | SUPPORT DIAMETER (SHANK) | TOTAL LENGTH |
|--|-----------------|------------------|------|----------------|--|-----------------------|--------------------------|--------------|
| | | Øc | α | Lc | Lu | Øv | Øs | Lt |
| KLOCKNER ESSENTIAL CONE 4.5 DIRECTO IMPLANTE KLOCKNER ESSENTIAL CONE 4.5 OCTACONE 12° KLOCKNER ESSENTIAL CONE 4.5 OCTACONE 25° KLOCKNER VEGA RV XIVE S 3,8 XIVE S 4,5 BIOHORIZONS 3,0 STRAUMANN SYNOCTA 6,5 STRAUMANN BLX RB STRAUMANN BLX WB | 33.345.856.01-2 | 1,8 | 45 | 1 | 8,5 | 0,9 | 3 | 50 |
| | 33.445.856.01-2 | 1,8 | 45 | 1 | 8,5 | 0,9 | 4 | 50 |
| | 33.645.856.01-2 | 1,8 | 45 | 1 | 8,5 | 0,9 | 6 | 50 |
| MIS C1 RP PALTOP UNIVERSAL MULTI UNIT MIS C1 WP S&M PREMIUM KHONO 3,3 S&M PREMIUM KHONO 3,8 S&M OUTLINK 3,3 S&M OUTLINK 4,1 S&M PREMIUM KHONO 4,25 BREDENT SKY NP BREDENT SKY RP ADIN TOUAREG/CLOSEFIT NP ADIN TOUAREG/CLOSEFIT UNP | 33.360.756.01-2 | 1,8 | 60 | 1 | 7,5 | 0,9 | 3 | 50 |
| | 33.460.756.01-2 | 1,8 | 60 | 1 | 7,5 | 0,9 | 4 | 50 |
| | 33.660.756.01-2 | 1,8 | 60 | 1 | 7,5 | 0,9 | 6 | 50 |
| ZIMMER SCREW-VENT 3.5 ZIMMER SCREW-VENT 4.5 ASTRA EVOLUTION UNIT ABUTMENT ZIMMER TYPE 5,7 | 33.370.716.01-2 | 1,8 | 70 | 1 | 7,1 | 0,9 | 3 | 50 |
| | 33.470.716.01-2 | 1,8 | 70 | 1 | 7,1 | 0,9 | 4 | 50 |
| | 33.670.716.01-2 | 1,8 | 70 | 1 | 7,1 | 0,9 | 6 | 50 |
| NOBEL BIOCARE BRANEMARK RP NOBEL BIOCARE MULTIUNIT RP BIOMET 3i OSSEOTITE NP BTI EXTERNAL CONNECTION NP BTI INTERNAL CONNECTION RP MIS MULTIUNIT ST KEYSTONE PRIMA NP KEYSTONE PRIMA RP KEYSTONE PRIMA WP NEOSS PROACTIVE 3,4 NEOSS PROACTIVE 4,1 BIOMET 3i OSSEOTITE WP BTI EXTERNAL CONNECTION WP BTI MULTIM UNIVERSAL RP ANTHOGYRD MULTIUNIT 4,8 BEGO MINI BTI INTERNAL WP LASAK MULTIUNIT QV/QR SIC SICACE 3,3 SIC SICACE 4,2 | 33.390.716.01-2 | 1,8 | 90 | 1 | 7,1 | 0,9 | 3 | 50 |
| | 33.490.716.01-2 | 1,8 | 90 | 1 | 7,1 | 0,9 | 4 | 50 |
| | 33.690.716.01-2 | 1,8 | 90 | 1 | 7,1 | 0,9 | 6 | 50 |
| STRAUMANN INTERNAL OCTAGON RP STRAUMANN INTERNAL OCTAGON 6,5 | 33.315.708.01-2 | 2 | 15 | 1 | 7 | 1 | 3 | 50 |
| | 33.415.708.01-2 | 2 | 15 | 1 | 7 | 1 | 4 | 50 |
| | 33.615.708.01-2 | 2 | 15 | 1 | 7 | 1 | 6 | 50 |
| STRAUMANN SYNOCTA RP | 33.330.708.01-2 | 2 | 30 | 1 | 7 | 1 | 3 | 50 |
| | 33.430.708.01-2 | 2 | 30 | 1 | 7 | 1 | 4 | 50 |
| | 33.630.708.01-2 | 2 | 30 | 1 | 7 | 1 | 6 | 50 |
| NOBEL BIOCARE ACTIVE RP NOBEL BIOCARE ACTIVE WP | 33.335.758.01-2 | 2 | 35 | 1 | 7,5 | 1 | 3 | 50 |
| | 33.435.758.01-2 | 2 | 35 | 1 | 7,5 | 1 | 4 | 50 |
| | 33.635.758.01-2 | 2 | 35 | 1 | 7,5 | 1 | 6 | 50 |
| OSSTEM TS RP CAMLOG SCREW-LINE 5,0 CAMLOG SCREW-LINE 6,0 | 33.345.808.01-2 | 2 | 45 | 1 | 8 | 1 | 3 | 50 |
| | 33.445.808.01-2 | 2 | 45 | 1 | 8 | 1 | 4 | 50 |
| | 33.645.808.01-2 | 2 | 45 | 1 | 8 | 1 | 6 | 50 |
| NOBEL BIOCARE REPLACE RP ASTRA LILAC NOBEL BIOCARE REPLACE WP ASTRA EVOLUTION 4.8 NOBEL BIOCARE BRANEMARK WP ASTRA EVOLUTION 5.4 NOBEL BIOCARE REPLACE 6.0 | 33.390.958.01-2 | 2 | 90 | 1 | 9,5 | 1 | 3 | 50 |
| | 33.490.958.01-2 | 2 | 90 | 1 | 9,5 | 1 | 4 | 50 |
| | 33.690.958.01-2 | 2 | 90 | 1 | 9,5 | 1 | 6 | 50 |

Reference code:

Cutting seat
Cutting diameter code
33.445.804.01-2
Shank Useful length



DMTONE
DYNAMIC MILLING TOOL



SCREWDRIVER ADAPTOR



Screwdriver for the Dynamic µScanbody System

Ref. 43.621.410.01-2
Screwdriver with manual handle
Standard length: 21mm



Ref. 43.624.410.01-2
Contra-angle
Length: 24mm



Ref. 43.621.410.01-2
Contra-angle
Length: 30mm



Ref. 43.621.415.01-2
Tiny
Screwdriver with manual handle
Length: 21mm



Ref. 43.620.411.01-2
Multi Unit
Contra-angle
Length: 20 mm



COMPLEMENTS



Manual handle
Made of stainless steel.
They are used to connect screwdriver bits with the contra-angle connection

Large manual handle for laboratory Ref. 49.601.000.03-2
Ideal to manipulate models in the laboratory.
Length: 55.65mm.



Manual handle for clinic
Ref. 49.601.000.01-2
Clinic handle: used to position the prosthesis in the mouth prior to torque control in the clinic.
Length: 15.65mm.

Manual torque wrench adapter prosthetic
Piece to connect the screwdriver with contra-angle connection to the torque wrench.



Universal Manual torque wrench adapter
Ref. 49.604.000.05-2
4mm Square connection



Straumann Manual torque wrench adapter
Ref. 49.604.000.07-2
Straumann connection



Nobel Biocare Manual torque wrench adapter
Ref. 49.604.000.08-2



Universal manual torque wrench prosthetic
Ref. 11.990.990.07-2
Torque wrench.
4mm square connection.
Torque 10-35N.c

IDENTIFICATION PRODUCT

The label accompanying all Dynamic Abutment® Solutions products contains all the information the user requires. The product label contains detailed information of the contents of the blister pack. The symbols found on the identity labels correspond to the international product identification standards. All products are supplied with their corresponding instructions for use which include an explanation of each of the symbols found on the product label.

Identification of compliance with the requirements of applicable EC legislation

Refer to the instructions for use

Manufactured



Product reference
Batch Number
Quantity

Content information

Extended information

Human Readable Interpretation (HRI)

Date of manufacture

Non-reusable



Do not use if packaging is damaged

Non sterile product

SECURITY & TRACEABILITY

All of our products are patented and manufactured under very strict quality guidelines. With the 3.0 Dynamic System, we provide a card for the patient and labels for the laboratory and the clinic to identify the position in Dynamic System is located.

We exercise complete control over the traceability of our products to fulfil the current health legislation. This helps repositioning the material and inform about the importance of using the appropriate tools when handling the Dynamic System components.

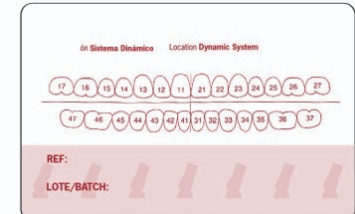

TALLADIUM GUARANTEE

TERMS AND CONDITIONS

These guarantee terms and conditions ("T&C") cover the entire range of Talladium products ("Products"), manufactured by TALLADIUM ESPAÑA S.L. and distributed by Geoda Medical S.L. or official dealers. The guarantee described in these T&C is exclusively in benefit of the clinician ("Clinician") and of the dental technician ("Technician") and not for the benefit of third parties or institutions, including patients.

GUARANTEE PERIOD

TALLADIUM ESPAÑA S.L. offers a lifelong guarantee for its entire range of products starting from the date of issue of the invoice.

GUARANTEE SCOPE

Subject to the limitations and exceptions described in these T&C, TALLADIUM ESPAÑA S.L. will offer the following benefits:

QUALITY: If there are defects in the materials or in the manufacturing of the Product, TALLADIUM ESPAÑA S.L. will replace the Product with no additional cost.

SAFETY: If, having complied with all the product indications, the prosthesis should have to be made again, due to a fault in the Dynamic Abutment® or Dynamic Titanium Base® system, TALLADIUM ESPAÑA S.L. will replace the abutments and screws necessary to remake the prosthesis, as well as the costs derived from its manufacturing.

In case of having used our products and having complied with all the product indications, the implants suffer any damage, TALLADIUM ESPAÑA S.L. will pay the cost of the implants. This coverage will only be valid during the first 6 months after the collocation of the prosthesis which includes our products.

CLAIM REQUIREMENTS AND PROCEDURE

To receive the benefits indicated in these T&C, the treating Clinician must satisfy the following requirements:

- a) The claim must be notified to TALLADIUM ESPAÑA S.L. within (30) days since the date the claimed defect was detected.
- b) This requires that the Clinician or Technician must contact the customer service department by telephone or by e-mail to make the claim.
- c) A claim form will be completed, which, together with a document or report which justifies the faulty Product and the faulty Product itself, will be sent by the customer to TALLADIUM ESPAÑA S.L. offices, within the previously indicated period.
- d) Clinicians or Technicians presenting a claim in agreement with these T&C must be up to date in any payments owing to TALLADIUM ESPAÑA S.L. or to any of its subsidiaries, at the time when the claim form is presented.
- e) All the use procedures of our Products must be carried out in agreement with the instructions of TALLADIUM ESPAÑA S.L. as well as in accordance with commonly accepted dentistry practices.
- f) The expenses derived from this procedure will be assumed by the customer. The return shipping costs will be assumed by TALLADIUM ESPAÑA S.L. in all those cases covered by these T&C.

Regardless of the guarantee rights, claims should be notified as soon as possible in order to comply with regulatory requirements.

GENERAL LIMITATIONS OF THIS GUARANTEE

With the exception of the guarantee described in these T&C, neither TALLADIUM ESPAÑA S.L. nor its representatives, nor third parties manufacturing or distributing the Products, represent or offer a guarantee, agreement or any other express or implicit, oral or written, commitment, with respect to the Products (without limitation), including guarantees involved in the marketing, durability or suitability for individual uses or purposes.

In addition and within the maximum extent permitted by the relative law, TALLADIUM ESPAÑA S.L. rejects (on its own behalf, and on behalf of its representatives and third parties that manufacture or distribute Products) any responsibility with respect to any direct or indirect damage caused, which may result from or be a consequence of the design, composition of the dental prosthesis into which the Products are integrated.

GUARANTEE EXCLUSIONS

TALLADIUM ESPAÑA S.L. limits this guarantee to:

- Transformed abutments that form part of the dental prosthesis. But not the screws used to anchor them.
- Clinical screws that have been in the mouth for more than 2 years.

AMENDMENT OR SUSPENSION OF THE GUARANTEE

TALLADIUM ESPAÑA S.L. reserves the right to amend or withdraw these T&C at any time and without prior notification. Any modification or suspension shall not affect products already placed in patients.



VIRGINIA WOOLF, 17 · 25005 · LLEIDA (SPAIN)
INTERNATIONAL +34 973 289 580
das@dynamicabutment.com

SPAIN +34 973 289 580
spain@dynamicabutment.com

www.dynamicabutment.com



